


# Delock 2.5" Converter U.2 SFF-8639 > M.2 NVMe Key M

## Description

This Delock converter enables the connection of a M.2 SSD in 2280, 2260, 2242 and 2230 format. The converter can be installed into your system internally through the U.2 68 pin interface.

**M.2** **U.2**  
**NVMe**

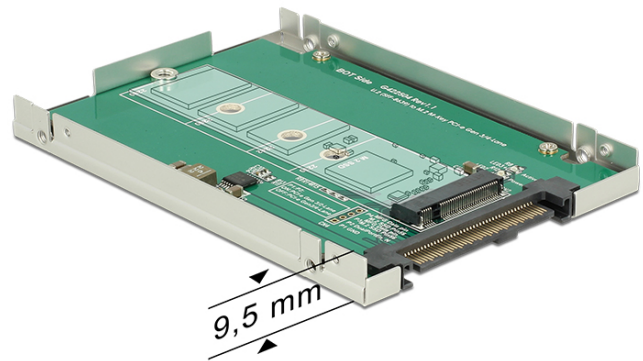

## Specification

- Connectors:
  - 1 x U.2 SFF-8639 male >
  - 1 x 67 pin M.2 key M slot
- Interface: PCIe (2 or 4 lanes)
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LEDs for power and activity
- Supports NVM Express (NVMe)
- Power consumption: max. 13.2 W
- Short circuit protection, in-rush current suppression, over heating protection
- Dimensions (LxWxH): ca. 100 x 65 x 9.5 mm

## System requirements

- Linux Kernel 3.16 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- A free U.2 SFF-8639 interface or
- A free SFF-8643 interface

## Package content

- Converter
- 2.5" enclosure
- 1 x fixing screw for M.2 module
- 1 x thermal pad
- User manual

## Item no. 62710




EAN: 4043619627103

Country of origin: Taiwan, Republic of China

Package: • Retail Box



Images



**General**

Form factor:	2.5"
Supported operating system:	Linux Kernel 3.16 or above Windows 7 32-bit Windows 7 64-bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit

LED indicator: power and activity

Supported module: M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe

Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported

**Interface**

Connector 1: 1 x M.2 NGFF based on PCIe

Connector 2: 1 x U.2 SFF-8639 male

**Technical characteristics**

Maximum power consumption: 13.2 W

**Physical characteristics**

Length: 100 mm

Width: 65 mm

Height: 7 mm