


Delock Riser Card NVMe M.2 Key A+E male to Key M Slot with 20 cm cable

Description

This riser card by Delock can be used to attach and connect an **M.2 SSD** to an optimal position in the case. The **flexible cable** allows a space-saving installation inside the computer case.

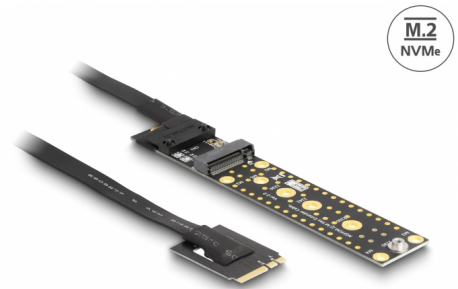

Item no. 64215

EAN: 4043619642151

Country of origin: China

Package: Box

Specification

- Connectors:
 - 1 x M.2 key A+E male
 - 1 x M.2 key M slot
- Interface: PCIe / NVMe (1 Lane)
- Form factor: M.2 2230
- Cable gauge: 30 AWG
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- LED indicator
- Compatible to PCI Express V4.0
- Bootable, ex UEFI version 2.3.1
- Supports NVM Express (NVMe)
- Length without connectors: ca. 20 cm

System requirements

- A free M.2 port with key A or key E
-

Package content

- Adapter
 - Screwdriver
 - Mounting material
 - User manual
-

Images



General

Function:	Bootable, ex UEFI 2.3.1 NVM Express (NVMe)
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported

Interface

Connector 1:	1 x M.2 key A+E male
Connector 2:	1 x M.2 key M slot

Physical characteristics

Cable length:	20 cm (without connector)
---------------	---------------------------