

Delock MDR male 36 pin solder connection with housing

Description


This shielded MDR (Mini D Ribbon) male with soldering connection by Delock can be used for cable mounting and I/O applications.

Protection by enclosure

The plastic housing protects the male connector from dirt and damage.

Strain relief

The screw-on strain relief fixes the cable in the enclosure.

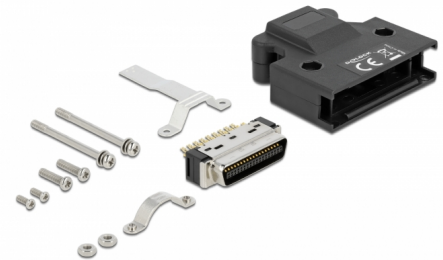

Item no. 66624

EAN: 4043619666249

Country of origin: China

Package: Poly bag

Specification

- Connectors: 1 x MDR 36 male (2 rows) with soldering connection
- Pitch: 1.27 mm
- Useable for a cable gauge from 30 to 24 AWG
- Contact coating: gold plated, nickel plated
- Operating temperature: -25 °C ~ 85 °C
- Fire-resistance rating: 94V-0
- Housing material: plastic
- Dimensions (LxWxH): ca. 43.5 x 39.0 x 12.7 mm

Package content

- MDR male
- Housing 2-part
- Strain relief 2-part
- 4 x screw
- 2 x locking screws
- 2 x nut

Interface

| | |
|------------|--|
| connector: | MDR 36 male (2 rows) with soldering connection |
|------------|--|

Technical characteristics

| | |
|------------------------|----------------|
| Operating temperature: | -25 °C ~ 85 °C |
|------------------------|----------------|

Physical characteristics

| | |
|-------------------|-------------|
| Pitch distance: | 1.27 mm |
| Housing material: | Plastic |
| Conductor gauge: | 30 - 24 AWG |
| Length: | 43.5 mm |
| Width: | 39.0 mm |
| Height: | 12.7 mm |