


# Delock D-Sub 25 pin male to Terminal Block for DIN rail

## Description

This terminal block adapter by Delock can be used to connect wires with stripped ends.

### DIN rail mounting

With the clips included in the delivery content, the adapter can be attached to a 15 mm or 35 mm wide DIN rail.

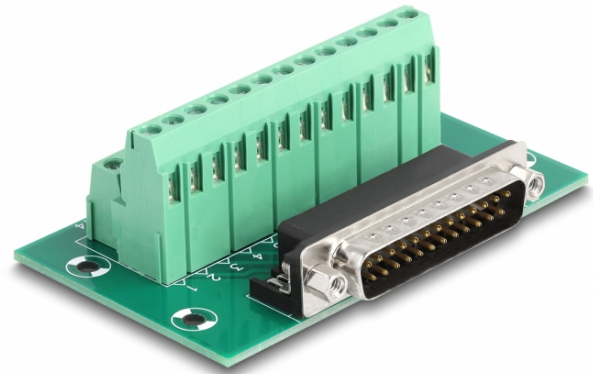

## Specification

- Connectors:
  - 1 x D-Sub 25 pin male
  - 1 x 26 pin terminal block
- Pin assignment: 1:1
- Pitch: 5.00 mm
- Useable for a cable gauge from 24 to 12 AWG
- DIN rail mounting: 15 mm and 35 mm
- Operating temperature: -40 °C ~ 100 °C
- Dimensions (LxWxH): ca. 86 x 51 x 30 mm

## System requirements

- A free D-Sub 25 pin female
- 15 mm or 35 mm DIN rail

## Package content

- Adapter
- 2 x DIN rail clip
- 5 x screws

## Item no. 66911

EAN: 4043619669110

Country of origin: China

Package: White Box

## Images



General	
Mounting type:	DIN rail mounting: 15 mm and 35 mm
Interface	
Connector 1:	1 x D-Sub 25 pin male
Connector 2:	1 x 26 pin terminal block
Technical characteristics	
Operating temperature:	-40 °C ~ 100 °C
Physical characteristics	
Pitch distance:	5.00 mm
Conductor gauge:	24 to 12 AWG
Length:	86 mm
Width:	51 mm
Height:	30 mm