


# Delock PoweredUSB cable male 12 V > DC 5.5 x 2.1 mm male 3 m for POS printers and terminals

## Description

This PoweredUSB cable by Delock can be used to supply power to a device with DC 5.5 x 2.1 mm female port via a PC or hub with PoweredUSB 12 V port.

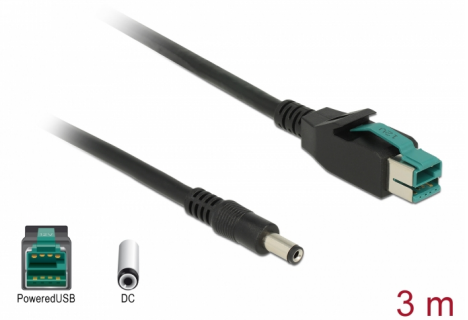

**Item no. 85499**

EAN: 4043619854998

Country of origin: China

Package: Zip poly bag

## Specification

- Connectors:
  - 1 x PoweredUSB male 12 V >
  - 1 x DC 5.5 x 2.1 mm male
- PoweredUSB specification
- Voltage: 12 V
- Cable gauge: 24 AWG
- Cable diameter: ca. 6 mm
- Cable double shielded
- Colour: black
- Length incl. connectors (L): ca. 3 m


## System requirements

- PC or hub with a free PoweredUSB 12 V female port

## Package content

- PoweredUSB cable

## Images

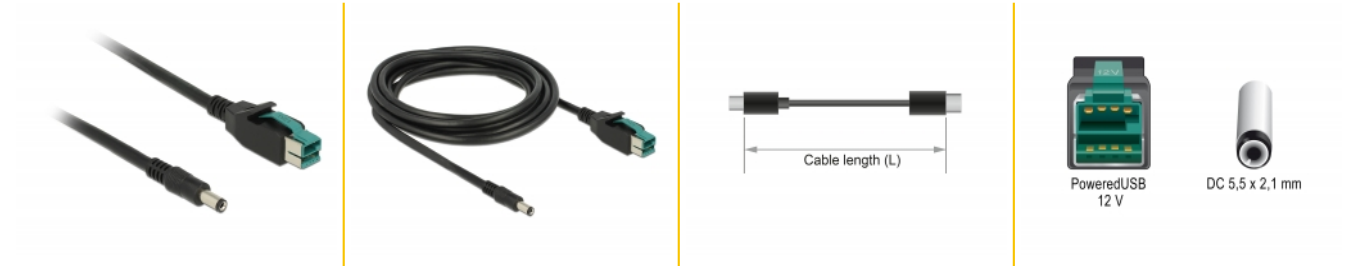

## General

Specification:	PoweredUSB
----------------	------------

## Interface

Connector 1:	1 x PoweredUSB male 12 V
Connector 2:	1 x DC 5.5 x 2.1 mm male

## Technical characteristics

Voltage:	12 V
----------	------

## Physical characteristics

Cable diameter:	6 mm
Conductor gauge:	24 AWG power line
Shielding:	double
Length:	3 m
Colour:	black