


# Delock PCI Express x4 Card to 1 x external SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female

## Description

This PCI Express card by Delock expands the PC by one external **USB 3.2** port. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

### SuperSpeed USB 20 Gbps

The card allows a data transfer rate of **20 Gbps** on the USB-C™ port.

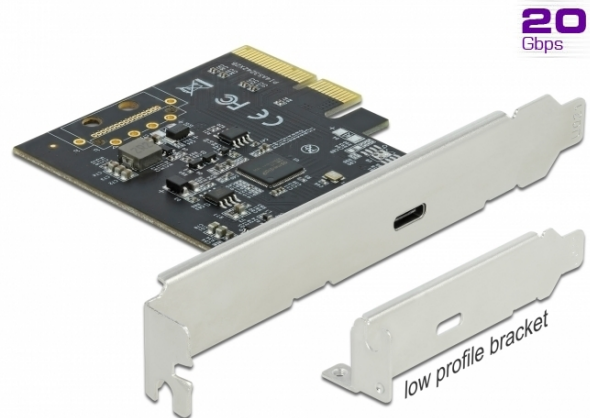

## Specification

- Connectors:
  - external: 1 x SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female
  - internal: 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3242
- Data transfer rate up to:
  - SuperSpeed USB 20 Gbps,
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Downwards compatible to USB 3.0, USB 2.0, USB 1.1
- Electrical power per port: max. 12 watt (5 V / 2.4 A)
- Bootable
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports Multiple INs

## System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

## Package content

- PCI Express card SuperSpeed USB 20 Gbps
- Low profile bracket
- User manual

## Item no. 89036

EAN: 4043619890361

Country of origin: China

Package: • Retail Box

## Images



| General                     |   |
|-----------------------------|---|
| Form factor:                | Low Profile   |
| Function:                   | bootable  |
| Supported operating system: | Windows 8.1 32-bit<br>Windows 8.1 64-bit<br>Windows 10 32-bit<br>Windows 10 64-bit<br>Linux Kernel 3.3 or above |
| Interface                   |   |
| External:                   | 1 x SuperSpeed USB 20 Gbps (USB 3.2 Gen 2x2) USB Type-C™ female   |
| Internal:                   | 1 x PCI Express x4, V3.0  |
| Technical characteristics   |   |
| Chipset:                    | Asmedia ASM3242   |
| Data transfer rate:         | 20 Gbps   |