


Delock PCI Express Card > 2 x internal M.2 Key B 110 mm - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by two M.2 slots. It can be connect two M.2 SATA modules in format 22110, 2280, 2260, 2242, 2230 in the card and connect via SATA cables to the mainboard.

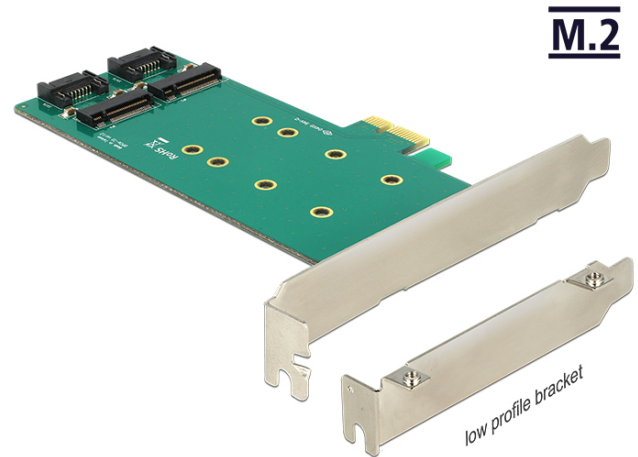

Specification

- Connector: internal:
 - 2 x 67 pin M.2 key B slot
 - 1 x PCI Express x1
 - 2 x SATA 6 Gb/s 7 pin female
- Interface: SATA
- Supports M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported
- Data transfer rate up to 6 Gb/s

System requirements

- Windows 7/7-64/8/8-64/8.1/8.1-64/10/10-64, Linux Kernel 3.19
- PC with one free PCI Express slot
- One free SATA 7 pin interface for each connected M.2 module based on SATA

Package content

- PCI Express card
- Low profile bracket
- 2 x fixing screw
- 2 x SATA cable, length ca. 50 cm
- User manual

Item no. 89473





EAN: 4043619894734

Country of origin: Taiwan, Republic of China

Package: Box



Images



General

Supported operating system:	Linux Kernel 3.19 or above Windows 7 32-bit Windows 7 64-bit Windows 8 32-bit Windows 8 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit
-----------------------------	--

Slot:	SATA
Supported module:	M.2 modules in format 22110, 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA

Maximum height of the components on the module: 1.5 mm application of double-sided assembled modules supported

Interface

Internal:	2 x 67 pin M.2 key B slot 2 x SATA 6 Gb/s 7 pin receptacle 1 x PCI Express x1, V1.1
-----------	---

Technical characteristics

Data transfer rate:	6 Gb/s
---------------------	--------