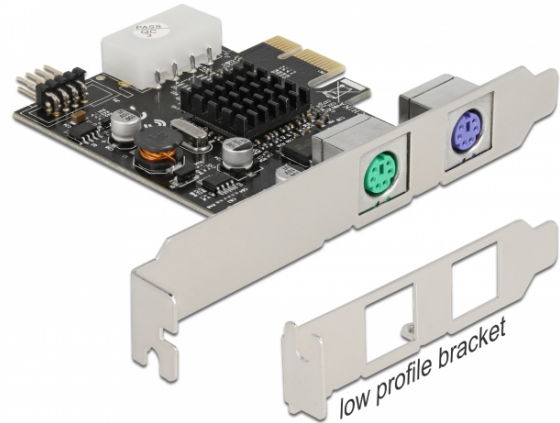**DELOCK®**
we move the world

Delock PCI Express x1 Card to 2 x PS/2 and USB Pin Header - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **two PS/2 ports** and **one internal USB 2.0 pin header**. To the PS/2 ports different devices such as a keyboard and a mouse can be connected. The internal USB port can be used to connect USB devices, with the help of an optional cable.

low profile bracket

Specification

• Connectors:
  external:
  2 x PS/2 female
  internal:
  1 x 9 pin USB 2.0 pin header male
  1 x PCI Express x1, V1.0
  1 x 4 pin power connector
• Chipset: ASIX MCS9990
• Data transfer rate up to:
  Hi-Speed 480 Mbps,
  Full-Speed 12 Mbps,
  Low-Speed 1.5 Mbps
• Hot Plug, Plug & Play

System requirements

• Linux Kernel 5.4 or above
• Windows 8.1/8.1-64/10/10-64/11
• Windows Server 2019
• PC with one free PCI Express slot

Package content

• PCI Express card
• Low profile bracket
• User manual

Images

Item no. 90049

EAN: 4043619900497

Country of origin: China

Package: Box

General	
Supported operating system:	Linux Kernel 5.4 or above
	Windows 10 32-bit
	Windows 10 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows Server 2019
Interface	
External:	2 x PS/2 female
Internal:	1 x 4 pin power connector
	1 x 9 pin USB 2.0 pin header male
	1 x PCI Express x1, V1.0a
Technical characteristics	
Chipset:	ASIX MCS9990