

Delock PCI Express x16 Card to 4 x internal NVMe M.2 Key M - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **four M.2 slots**. Up to four M.2 SSDs in format 2280, 2260 and 2242 can be connected.

Delock M.2 PCIe card for gaming and server

Especially in the gaming and server range, this card is ideally suited to expand the existing system by four fast M.2 NVMe slots. All slots can be used simultaneously.



Specification

- Connectors:
 - internal:
 - 4 x 67 pin M.2 key M slot
 - 1 x PCI Express x16, V3.0
- Chipset: Broadcom PEX8747
- Interface: PCIe / NVMe
- Supports M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Data transfer rate up to 32 Gbps
- Supports NVM Express (NVMe)
- Bootable, ex UEFI version 2.3.1
- Supports S.M.A.R.T.
 - 1 x 37 mm fan
 - 1 x heat sink
 - 6 x LED indicator

System requirements

- Linux Kernel 5.8 or above
- Windows 8.1/8.1-64/10/10-64
- Windows Server 2019
- PC with one free PCI Express x16 / x32 slot

Package content

- PCI Express card with fan
- Low profile bracket
- User manual


Item no. 90078

EAN: 4043619900787

Country of origin: China

Package: Box

Images

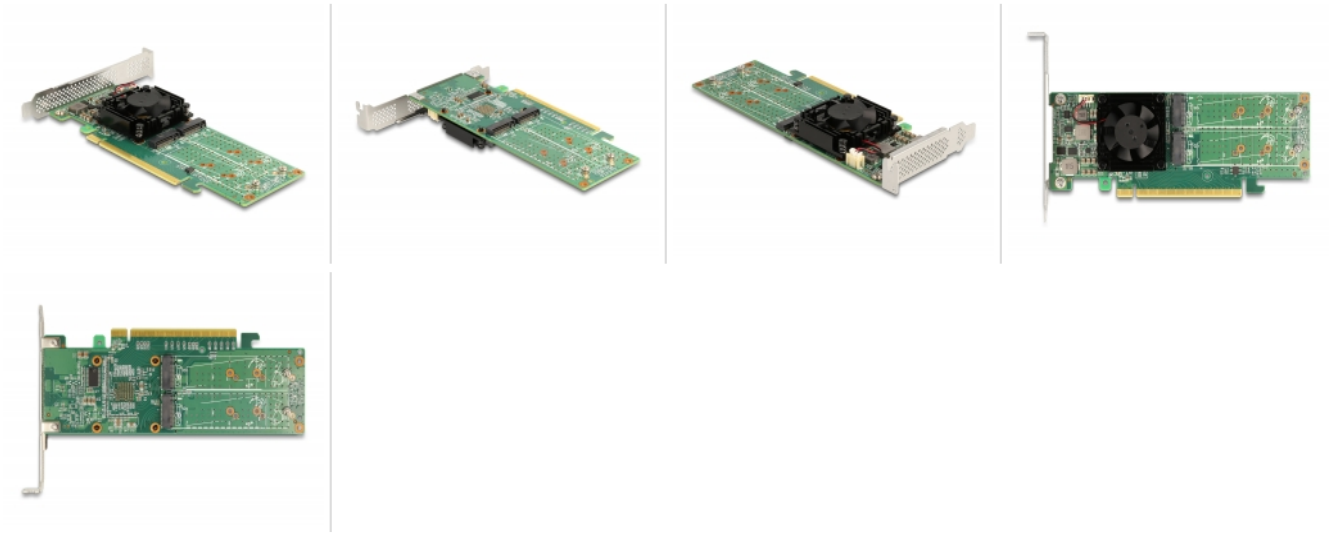

General	
Form factor:	Low Profile
Function:	Bootable, ex UEFI 2.3.1
Supported operating system:	Linux Kernel 5.8.0 or above Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows Server 2019
LED indicator:	6 x
Slot:	PCIe
Supported module:	M.2 modules in format 2280, 2260 and 2242 with key M or key B+M based on PCIe
Maximum height of the components on the module:	1.5 mm application of double-sided assembled modules supported
Interface	
Internal:	4 x 67 pin M.2 key M slot 1 x PCI Express x16, V3.0
Technical characteristics	
Chipset:	Broadcom PEX8747