


Delock PCI Express x1 Card to 2 x external USB 3.2 Gen 1 Type-A + 1 x internal 19 pin USB pin header male - Low Profile Form Factor

Description

This PCI Express card by Delock expands the PC by **two external USB 3.2 ports** as well as **one internal 19 pin USB pin header male** port. Different USB devices, such as docking stations, card readers, external enclosures etc., can be connected to the card.

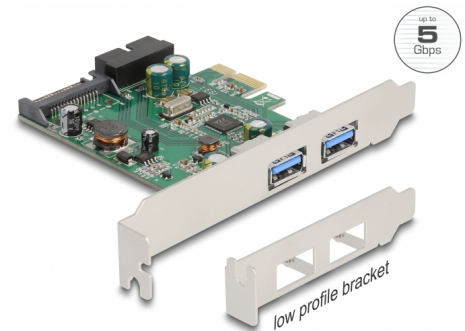

Item no. 90096

EAN: 4043619900961

Country of origin: China

Package: Retail Box

Specification

- Connectors:
 - external: 2 x SuperSpeed USB 5 Gbps (USB 3.2 Gen 1) Type-A female
 - internal:
 - 1 x 19 pin USB pin header male
 - 1 x SATA power connector
 - 1 x PCI Express x1, V2.0
- Chipset: VIA VL805
- Data transfer rate up to:
 - SuperSpeed USB 5 Gbps,
 - Hi-Speed 480 Mbps,
 - Full-Speed 12 Mbps,
 - Low-Speed 1.5 Mbps
- Supports UASP
- Supports eXtensible Host Controller Interface (xHCI) specification 1.0
- Bootable

System requirements

- Linux Kernel 5.13 or above
- Windows 8.1/8.1-64/10/10-64/11
- PC with one free PCI Express slot
- Power supply with a free SATA power connector

Package content

- PCI Express card USB 3.0
- Low profile bracket
- User manual

Images



General

| | |
|-----------------------------|--|
| Function: | bootable |
| Supported operating system: | Windows 10 32-bit Windows 10 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 11 Linux Kernel 5.13 or above |

Interface

| | |
|-----------|---|
| External: | 2 x SuperSpeed USB 5 Gbps (USB 3.2 Gen 1) Type-A female |
| Internal: | 1 x PCI Express x1, V2.0 1 x SATA 15 pin power connector 1 x 19 pin USB pin header male |

Technical characteristics

| | |
|---------------------|-----------|
| Chipset: | VIA VL805 |
| Data transfer rate: | 5 Gbps |