


# Delock PCI Express x4 Card to 2 x external USB 3.2 Gen 2 Type-A female

## Description

This PCI Express card by Delock expands the PC by two external USB 3.2 ports. Different USB Type-A devices, such as docking stations, card readers, external enclosure etc., can be connected to the card. The card allows a data transfer rate of 10 Gbps on both ports when used simultaneously.

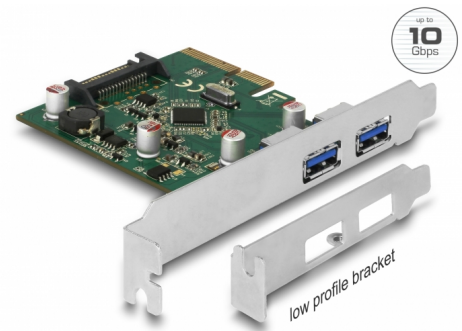

**Item no. 90298**

EAN: 4043619902989

Country of origin: China

Package: Retail Box

## Specification

- Connectors:
  - external:
    - 2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
  - internal:
    - 1 x SATA 15 pin power connector
    - 1 x PCI Express x4, V3.0
- Chipset: Asmedia ASM3142
- Data transfer rate up to:
  - SuperSpeed USB 10 Gbps,
  - SuperSpeed USB 5 Gbps,
  - Hi-Speed 480 Mbps,
  - Full-Speed 12 Mbps,
  - Low-Speed 1.5 Mbps
- Power supply via PCI Express interface or via SATA 15 pin power connector
- Electrical power per port: max. 4.5 watt (5 V / 900 mA)
- Supports eXtensible Host Controller Interface (xHCI) specification 1.1
- Supports UASP
- Supports Multiple INs

---

## System requirements

- Linux Kernel 4.6 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64/11
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

---

## Package content

- PCI Express card SuperSpeed USB 10 Gbps
- Low profile bracket
- Driver CD
- User manual

---

## Images



## General

Form factor:	Low Profile
Supported operating system:	Linux Kernel 4.6 or above Windows 10 32-bit Windows 10 64-bit Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit

## Interface

External:	2 x SuperSpeed USB 10 Gbps (USB 3.2 Gen 2) Type-A female
Internal:	1 x PCI Express x4, V3.0 1 x SATA 15 pin power connector

## Technical characteristics

Chipset:	Asmedia ASM3142
Data transfer rate:	USB 3.1 Gen 2 up to 10 Gb/s

## Physical characteristics

Slot bracket:	low profile standard
---------------	-------------------------