


# Delock PCI Express Card to 2 x internal USB 3.0 Pin Header

## Description

This PCI Express card by Delock expands the PC by two internal **USB 3.0 pin header**. Different USB devices, such as docking stations, card readers, external enclosure etc., can be connected to the card, by using an optional cable.

### Optional expansion of the USB ports

The PCIe card enables the expansion of the external USB ports on the front of the computer or on the slot bracket, by additional cables, **slot brackets or front panels**.

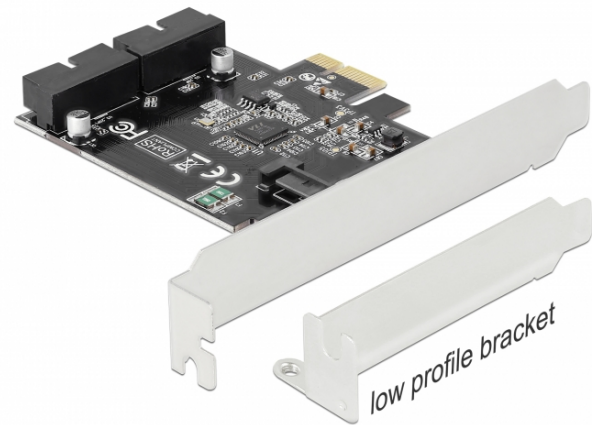

## Specification

- Connectors:  
2 x 19 pin USB 3.0 pin header male  
1 x PCI Express x1, V2.0  
1 x SATA 15 pin power connector
- Chipset: VIA VL805
- Data transfer rate up to:  
SuperSpeed 5 Gbps,  
Hi-Speed 480 Mbps,  
Full-Speed 12 Mbps,  
Low-Speed 1.5 Mbps
- Supports xHCI specifications V1.0
- Supports UASP

## System requirements

- Linux Kernel 4.9.4 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

## Package content

- PCI Express card
- Low profile bracket
- User manual

## Item no. 90387



EAN: 4043619903870

Country of origin: China

Package: Retail Box



## Images



**General**

Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Linux Kernel 4.9.4 or above

**Interface**

Connector 1:	1 x PCI Express x1
Connector 2:	2 x 19 pin USB 3.0 pin header male
connector 3:	1 x SATA 15 pin power connector

**Technical characteristics**

Chipset:	VIA VL805
Data transfer rate:	5 Gbps