


Delock 4 port SATA and 1 slot M.2 Key B PCI Express x4 Card - Low Profile Form Factor

Description

The PCI Express card by Delock expands a PC by four internal **SATA** ports and one **M.2** slot. Different devices such as SSDs, hard drives, DVD-drives etc. and one M.2 module in 2242 or 2230 format can be connected to the card.

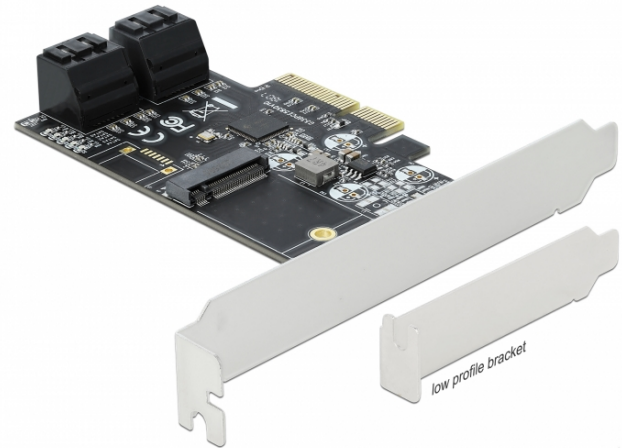

Specification

- Connectors:
internal:
4 x SATA 6 Gb/s 7 pin plug
1 x 67 pin M.2 key B slot
1 x PCI Express x4, V3.0
- Chipset: JMicron JMB585
- 5 x LED indicator
- Interface: SATA
- Supports M.2 modules in format 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable

System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 4 x SATA cable, length ca. 50 cm
- M.2 mounting material
- User manual

Item no. 90396


EAN: 4043619903962

Country of origin: China

Package: Retail Box



Images



| General | |
|-----------------------------|---|
| Function: | Hot Swap bootable |
| Supported operating system: | Windows 7 32-bit Windows 7 64-bit Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 or above |
| LED indicator: | 5 x |
| Supported module: | M.2 modules in format 2242 and 2230 with key B or key B+M based on SATA |
| Interface | |
| Internal: | 1 x PCI Express x4, V3.0 1 x 67 pin M.2 key B slot 4 x SATA 6 Gb/s 7 pin plug |
| Technical characteristics | |
| Chipset: | JMicron JMB585 |
| Data transfer rate: | 6 Gb/s |