




Delock 2 port SATA PCI Express Card with RAID 1 - mirroring existing data

Description

This PCI Express card by Delock expands the PC by**two internal SATA ports**. Different devices such as SSDs, hard drives, DVD-drives etc. can be connected to the card.

RAID 1

The special feature of this PCIe card is that an SSD / HDD, which already contains data, does not need to be formatted in order to build a RAID 1 group with a second SSD / HDD. The data of the **existing SSD** / **HDD** will be mirrored to a new one.

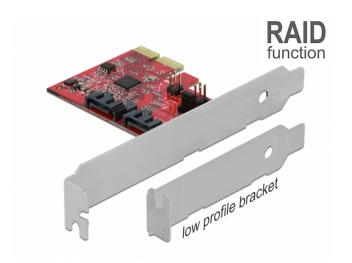

Specification

- · Connectors:
- 2 x SATA 6 Gb/s 7 pin plug
- 1 x PCI Express x1, V2.0
- 4 x 2 pin pin header for LED
- Chipset: Asmedia ASM1062R
- Supports RAID 1
- Jumper for RAID mode ON / OFF
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Plug

System requirements

- Linux Kernel 3.3 or above
- Windows 7/7-64/8.1/8.1-64/10/10-64
- PC with one free PCI Express slot

Package content

- PCI Express card
- Low profile bracket
- Driver CD
- User manual

Item no. 90406

EAN: 4043619904068

Country of origin: Taiwan, Republic of

China


Package: • Retail Box

Images













General	
Form factor:	Low Profile
Supported operating system:	Windows 7 32-bit
	Windows 7 64-bit
	Windows 8.1 32-bit
	Windows 8.1 64-bit
	Windows 10 32-bit
	Windows 10 64-bit
	Linux Kernel 3.3 or above
Interface	
Connector 1:	1 x PCI Express x1, V2.0
Connector 2:	2 x SATA 6 Gb/s 7 pin plug
connector 3:	4 x 2 pin pin header for LED
Technical characteristics	
Chipset:	Asmedia ASM1062R
RAID function:	1
Physical characteristics	
Slot bracket:	low profile
	standard