


Delock 3 port SATA and 2 slot M.2 Key B PCI Express x4 Card - Low Profile Form Factor

Description

The PCI Express card by Delock expands a PC by **three internal SATA ports and two M.2 slots**. Different devices such as SSDs, hard drives, DVD-drives etc. and two M.2 modules in 2280, 2260, 2242 or 2230 format can be connected to the card.

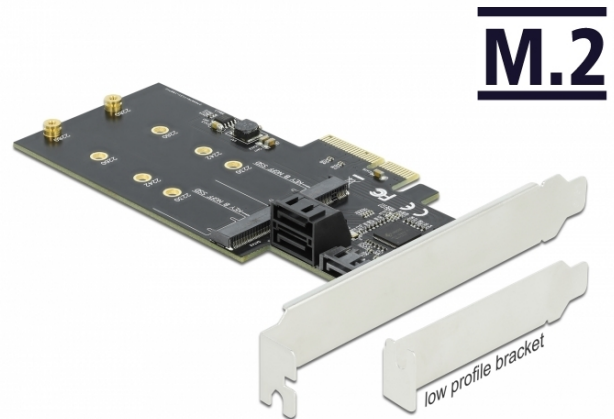

Specification

- Connectors:
internal:
3 x SATA 6 Gb/s 7 pin plug
2 x 67 pin M.2 key B slot
1 x PCI Express x4, V3.0
- Chipset: JMicron JMB585
- 5 x LED indicator
- Interface: SATA
- Supports M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
- Maximum height of the components on the module: 1.5 mm, application of double-sided assembled modules supported
- Supports Native Command Queuing (NCQ)
- Supports S.M.A.R.T.
- Supports TRIM
- Supports DevSleep
- Hot Swap
- Bootable

System requirements

- Linux Kernel 3.3 or above
- Windows 8.1/8.1-64/10/10-64
- PC with one free PCI Express x4 / x8 / x16 / x32 slot

Package content

- PCI Express card
- Low profile bracket
- 3 x SATA cable, length ca. 35 cm
- Screwdriver
- User manual



Item no. 90499

EAN: 4043619904990

Country of origin: China

Package: • Retail Box

Images



General	
Function:	Hot Swap bootable
Supported operating system:	Windows 8.1 32-bit Windows 8.1 64-bit Windows 10 32-bit Windows 10 64-bit Linux Kernel 3.3 or above
LED indicator:	5 x
Supported module:	M.2 modules in format 2280, 2260, 2242 and 2230 with key B or key B+M based on SATA
Interface	
Internal:	1 x PCI Express x4, V3.0 2 x 67 pin M.2 key B slot 3 x SATA 6 Gb/s 7 pin plug
Technical characteristics	
Chipset:	JMicron JMB585
Data transfer rate:	6 Gb/s