


# LED Panel Light Specification



## Product Features

1. Certificate: &UL & DLC & FCC & CE
2. Lifespan > 50,000 hours & 5 years warranty
3. Flicker-free driver,0-10V dimming can be well compatible with most dimmers;
4. Even & uniform light: branded PMMA light guide plate with perfect laser screening and light distribution technology.
5. Use high quality SMD2835 LEDs
- 6.Aluminum Alloy Frame: strong and firm due to special fabrication processing; frame color can be silver or white
7. Installation: Recessed ; Suspended ; Surface-mounted.
8. Human-friendly Junction driver box for fire-proofing and easy installation.

## Product Dimension

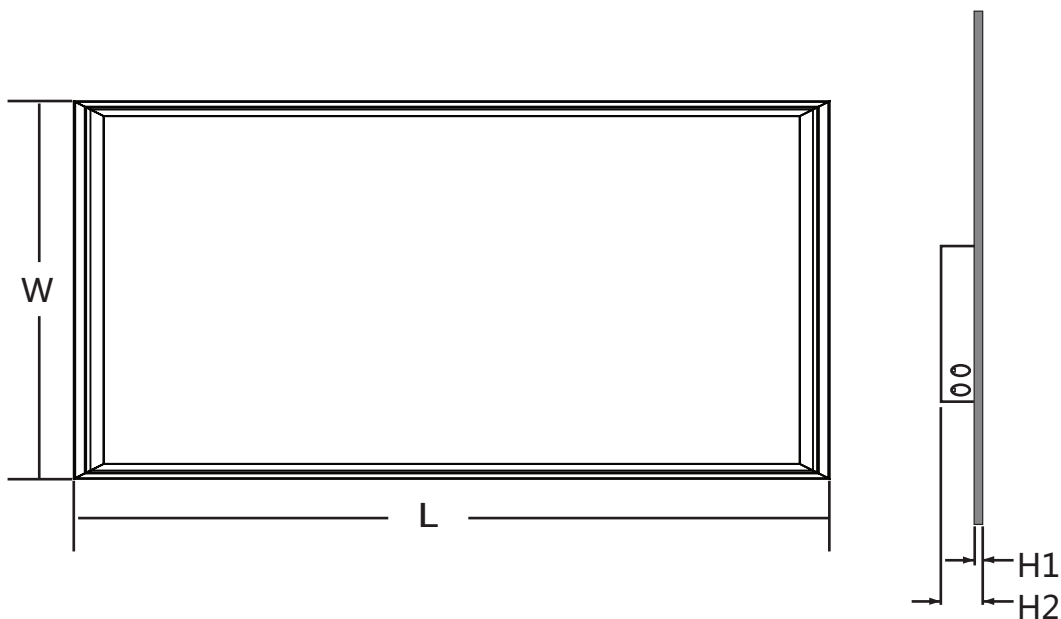

Part No.	Size(ft)	Outline Dimension(mm)			
		L	W	H1	H2
WSD-P22FT36W-XXK	2X2 ft	603	603	12	50
WSD-P14FT36W-XXK	1X4 ft	1212	303	12	50
WSD-P24FT48W-XXK	2X4 ft	1212	603	12	50




## Specification



Size	Model	Power	Input voltage	Luminous Flux(lm)	Luminous Efficacy (lm/W)	Color temperature	(Ra)	beam angle	Lifespan	Dimmable
2X2ft	WSD-P22FT36W-XXK	36W	AC100-277V	4765.99lm	133.09	4000K, 5000K	80	120	>50000	0-10V
1X4ft	WSD-P14FT36W-XXK	36W		4775.26lm	134.22	4000K, 5000K	80	120	>50000	
2X4ft	WSD-P24FT48W-XXK	48W		6378.95lm	132.62	4000K, 5000K	80	120	>50000	

## Accessories







Emergency Kits		Charging: 24hours	Surface Mounting Kits 	Hanging Kits 
		Back up: 90minutes		
		Power: 6Watts		

## Application







# Test Report

## WSD-P22FT36W-XXK

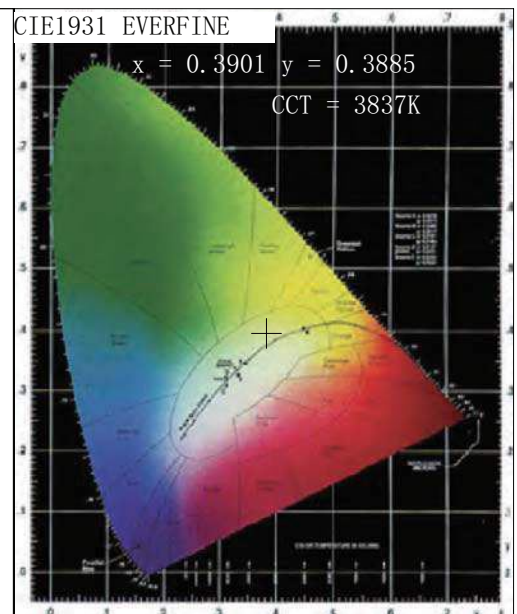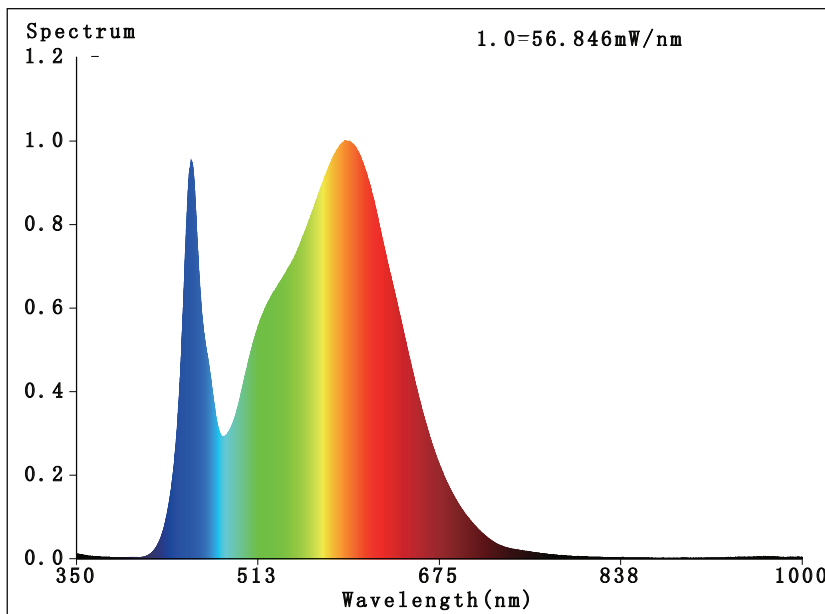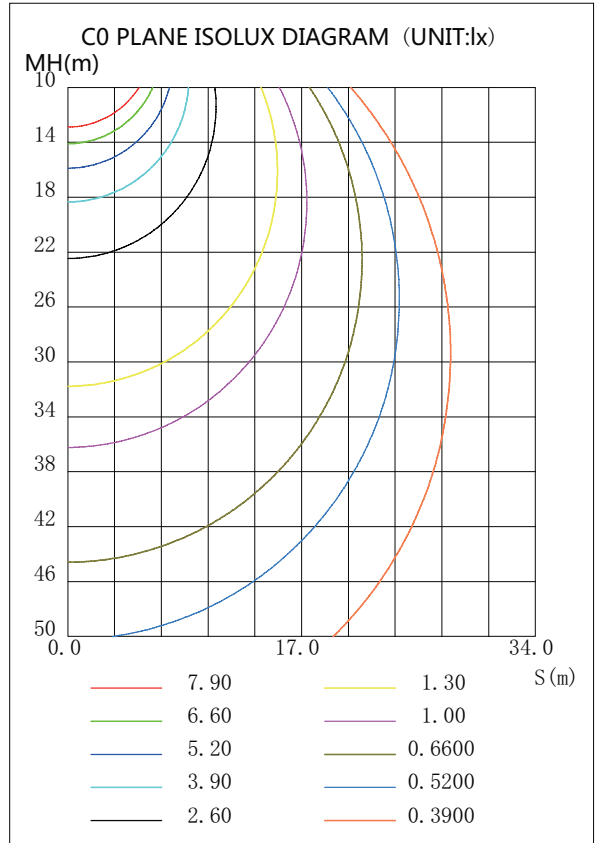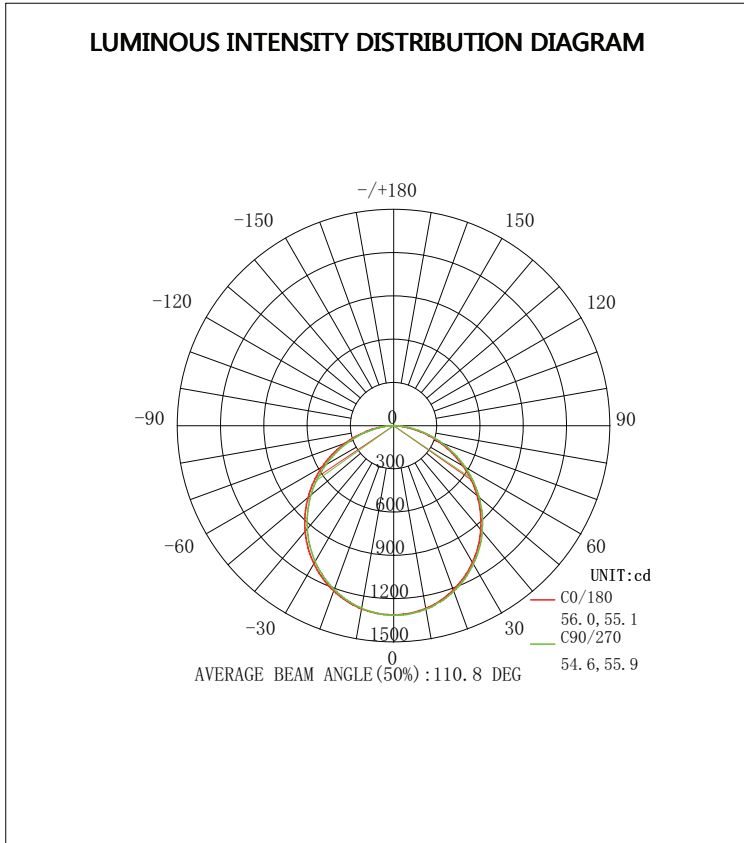

# Test Report ■ ■

## WSD-P24FT48W-XXK

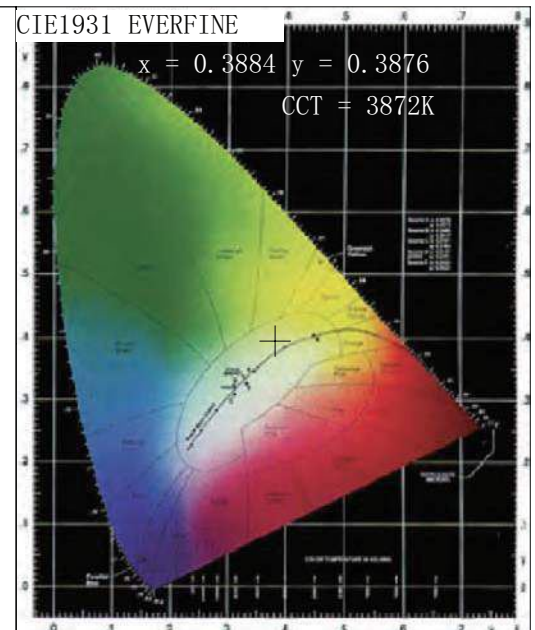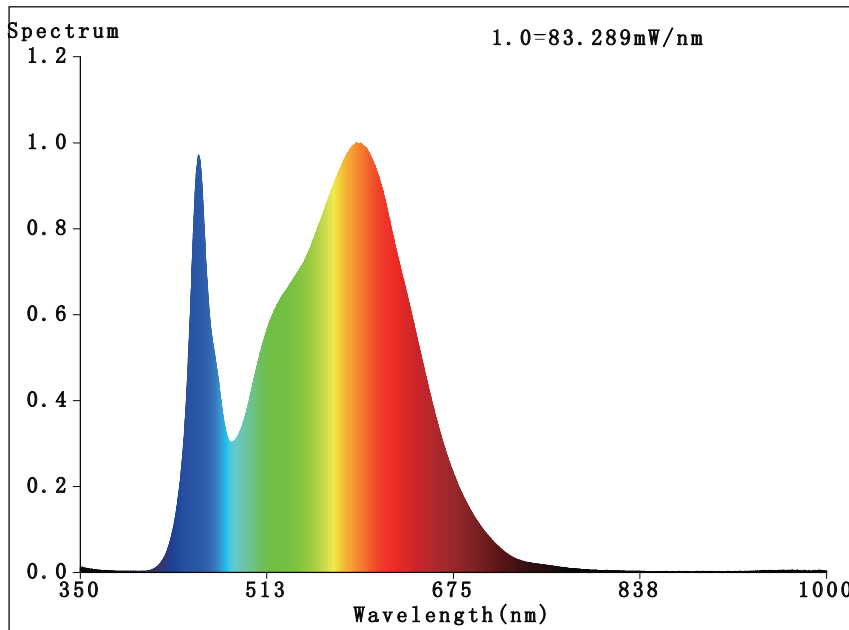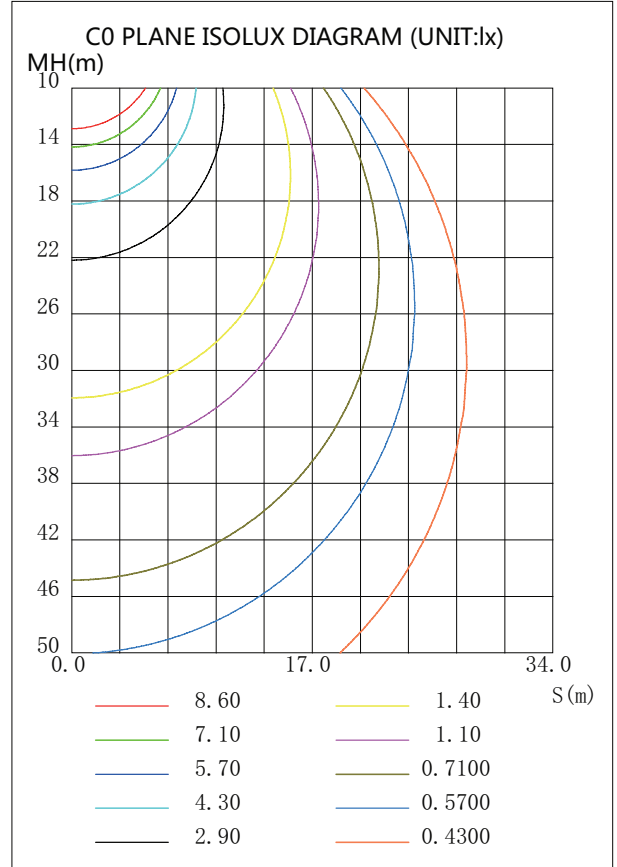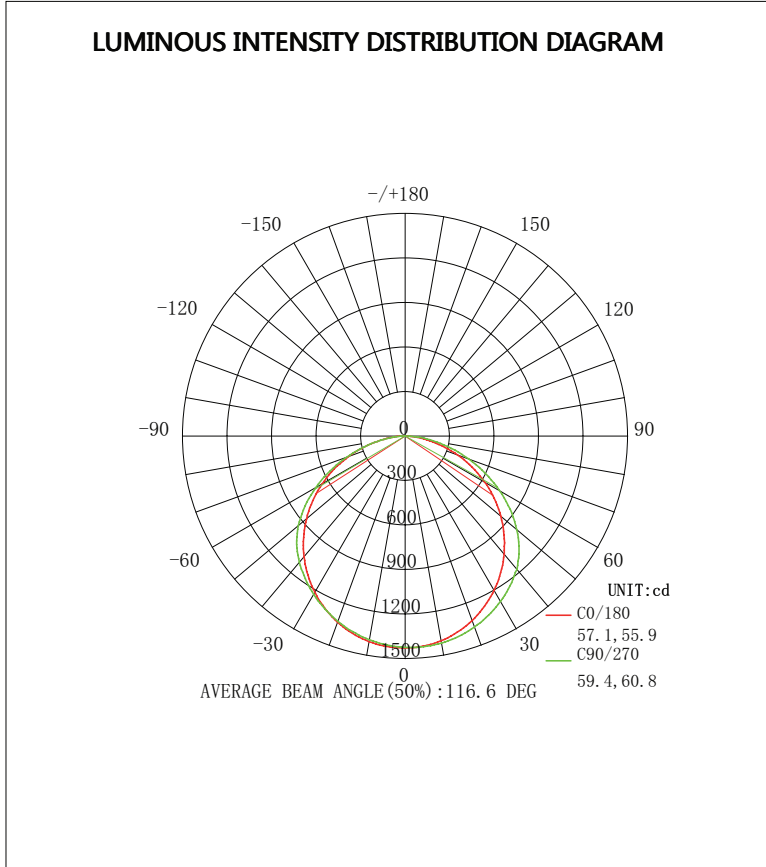

Packing /weight 

Model	Carton Size (L*W*H)mm	Carton CBM m <sup>3</sup>	QTY PCS	Single N.W. KG	FCL G.W. KG	20GP PCS	40GP PCS	40HQ PCS
<b>2X2ft</b>	710x710x130	0.065533	2	4.2	9.26	858	1770	2076
<b>1X4ft</b>	1310x410x130	0.069823	2	4.2	9.26	802	1662	1948
<b>2X4ft</b>	1310x710x130	0.120913	2	6.8	16.8	464	960	1124

Package Diagram 

