


WARRANTY  
**5** YEAR

**IP65**

**-40~+40 °C**

**POST TOP LIGHT**


**DIMENSION**

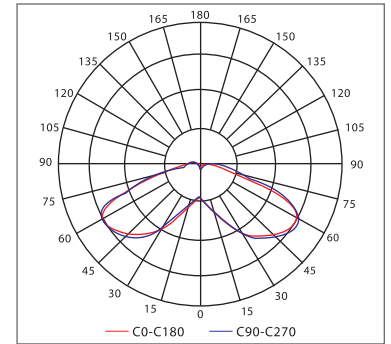

**PHOTOMETRIC**

**WATTAGE & CCT TURNABLE**

MODEL NO.	AVAILABLE WATTAGE	LUMENS	AVAILABLE	CRI	POWER FACTOR
YR-TP468-80MW-50KMC-LV-D	80W-60W-40W	9,600LM-7,800LM-5,600LM	3000K-4000K-5000K	>70	>0.92



**WATT**

WATT	80W	60W	40W
	1 2	1 2	1 2

CCT	3000K	4000K	5000K

Spinned Aluminum Cover with Powder Coated



High Efficacy LED Modulator

Optional Photocell

High Pressure Dia Casting Base



Polycarbonate Housing

**SINGLE WATTAGE&CCT**

	VOLTAGE (V)	WATT(W)	5000K EFFICACY (LM/W)	5000K LUMENS (LM)	BEAM ANGLE (H-V)	REPLACE	DIMMING	CRI	POWER FACTOR	AVAILABLE CCT(K)
YR-TP468-40	120-277	40	110	4400	Type V	100-175W HID	Available	>75	>0.92	4000 5000
YR-TP468-60	120-277	60	112	5880	Type V	250-320W HID	Available			
YR-TP468-80	120-277	80	109	8720	Type V	250-400W HID	Available			

**PACKAGE INFORMATION**

MODEL	INNER BOX (MM)	MASTER CARTON (MM)	QTY/CTN	NET WEIGHT (KG)	GROSS WEIGHT (KG)	CUBIC METER
TP468-40/60/80	N/A	470*470*1080	1	13.8	15.8	0.244

**OPTIONAL ACCESSORIES**