

LED Bollard Light



PRODUCT FEATURES:

- ❖ Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277V.
- ❖ Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- ❖ Excellent efficacy ≥ 130lm/w.

Additional Information:

- Power: 25W
- Input: AC 120-277V
- CCT : 4000K/5000K
- Light Source: SMD 2835 LEDs
- Driver: WELED POWER





MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	



PRODUCT APPLICATIONS:

The LED Bollard Lighting Series can be widely used for Outdoor (Wet Location) Excellent for Lawns, Courtyards, Roadways and many other applications.

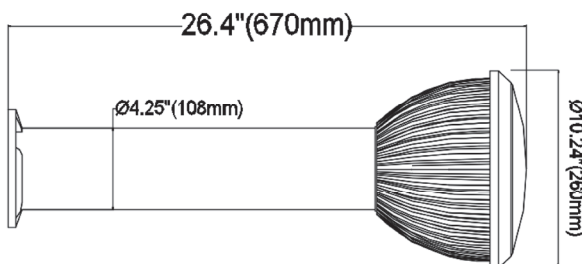

Structure Features:

- Shell Materials: Aluminum & PC
- Finish: Dark Bronze/White/black(Optional)
- Net Weight: 2.76KG (6.08LBS)
- **Product Size: 670mmX260mmX108mm**
26.4"X10.24"X4.25"
- **Carton Size: 690mmX270mmX270mm**
27.2"X10.6"X10.6"



WSD LED INC
Green Lighting Resources




25W

LED Bollard Light

TECHNICAL PARAMETERS:

Type	WSD-BL25W27-XXK-Z[D,W,B,S]		
Power	25W	Lighting Angle	141°
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs
PF	≥ 0.90	Working Life	>75000 hrs
Driver Efficiency	≥ 87%	Working Temperature	-30 - +45°C
Luminous Flux	3360 Lm	Storage Temperature	-40 - +80°C
Color Temperature	4000K/5000K	Protection Level	Wet Location
CRI	Ra>70	Cable	3core, 18AWG (0.3m)

PHOTOMETRY:

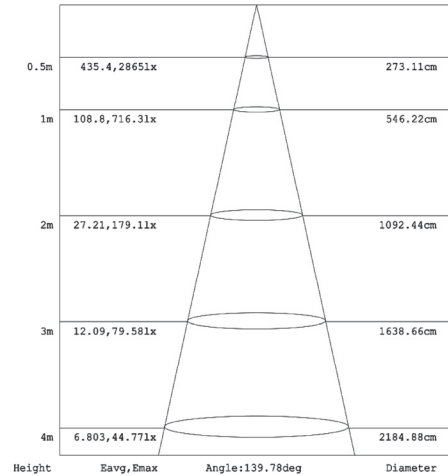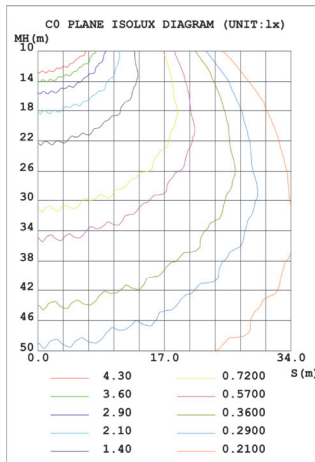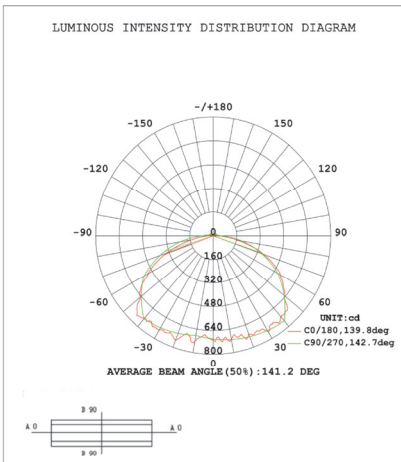

ORDERING EXAMPLE: WSD-BL25W27-XXK-Z [D, W, B, S]

WSD	BL	25W	27	XXK	Z
Company	Product	Power	Voltage	ColorTemp	FINISH
WSD LED INC	LED Bollard Light	25W(25W)	AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)