

# LED STRIP LIGHT

## FEATURES:

- ❖ Quick Installation;
- ❖ Instant on;
- ❖ 5 years warranty;
- ❖ Excellent efficacy 130lm/w or 160lm/w;
- ❖ DLC Premium listed as LED Strip light & Linear lowbay;



MODEL #	
PROJECT:	
NOTES:	
DATE:	
PREPARED BY:	

## Additional Information:

- Power: 24W/40W/64W
- Input: AC 100-277V
- CCT : 4000K/5000K
- Efficacy: 130 LM/W
- Light Source: LED SMD
- Inner/outer emergency driver



## TECHNICAL SPEC.


Housing	Riveted Sheet Metal c/w standard top and end KO
Finish	White
Lens	Frosted PC
Mounting	Surface, hanging and continuous row mounted May be mounted to TBar ceilings Application Commercial, industrial and area lighting, warehouses, offices, hallways etc.

## ELECTRICAL SPEC.

Power Factor	>0.90
Ambient temp.	-20°C to 40°C
Input Voltages	100-277vAC Standard
CRI	>80

## OPTICAL & PERFORMANCE SPEC.

Suitability	For damp locations
Beam Angle	120°
L70	>50,000hours

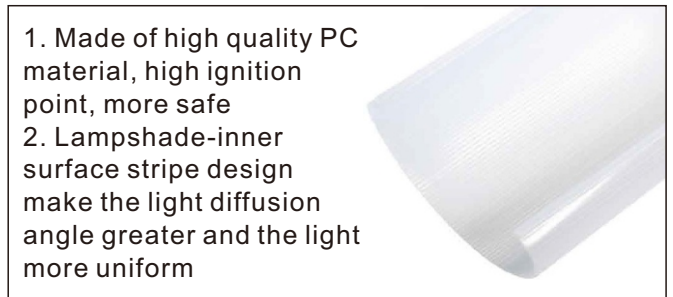




**WSD LED INC**  
Green Lighting Resources

# LED STRIP LIGHT

**24W**  
**40W/64W**

## DIMENSIONS :

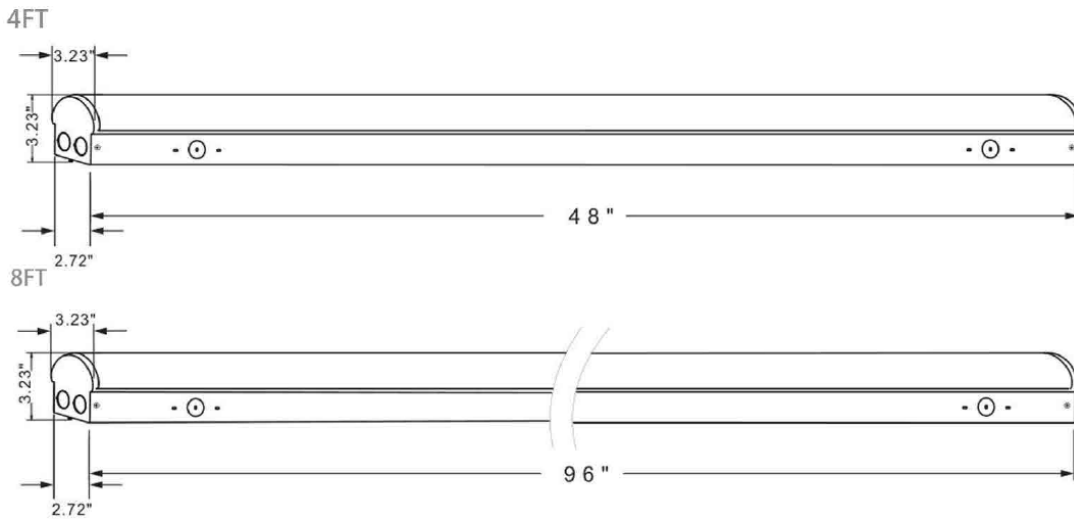


## PACKING INFO:

Part No.	Qty./Ctn	Ctn size	N.W. (lbs/Ctn)	G.W. (lbs/Ctn)	Qty./Pallet	Qty./40HQ	
						In pallets	In Ctns
WSD-ST4FT24-XXK	4pcs	50.6*7.5*7.7inch	19.4lbs	24.2lbs	180pcs	4320pcs	6048pcs
WSD-ST4FT40-XXK	4pcs	50.6*7.5*7.7inch	19.4lbs	24.2lbs	180pcs	4320pcs	6048pcs
WSD-ST8FT40-XXK	4pcs	98.8*7.5*7.7inch	33.3lbs	41.5lbs	180pcs	2160pcs	2740pcs
WSD-ST8FT64-XXK	4pcs	98.8*7.5*7.7inch	33.3lbs	41.5lbs	180pcs	2160pcs	2740pcs

## PERFORMANCE DATA:

Size	Part No.	Power	luminous Flux	Input Voltage	PF	Ra	Beam Angle	Warranty	Certificate
4FT	WSD-ST4FT24-XXK	24W	3120LM	AC100-277V	>0.9	>80	110	5 Years	cUL&Premium
4FT	WSD-ST4FT40-XXK	40W	5200LM	AC100-277V	>0.9	>80	110	5 Years	cUL&Premium
8FT	WSD-ST8FT40-XXK	40W	5200LM	AC100-277V	>0.9	>80	110	5 Years	cUL&Premium
8FT	WSD-ST8FT64-XXK	64W	8320LM	AC100-277V	>0.9	>80	110	5 Years	cUL&Premium

## DIMMING CONNECTION:

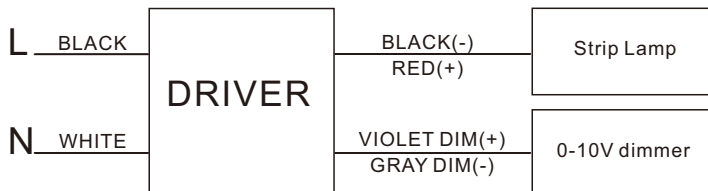

## ORDERING EXAMPLE:

WSD	St	4FT	24	XXK
Company	Product	Size	Power	ColorTemp
<b>WSD (WSD LED INC)</b>	<b>St</b> Led Strip Light	4FT( 4 feet ) 8FT( 8 feet )	24 ( 24 W ) 40 ( 40 W ) 64 ( 64 W )	<b>40K</b> (4000K) <b>50K</b> (5000K) ± 500K

# LED STRIP LIGHT


## DIMENSIONS:

A:



1. Tie hook with chain and then insert it into installation hole.
2. Fix chain to installation location, adjust the height of chain until fixture is balanced.
3. Connect AC wire and dimming wire.
4. Wrap wire with metal material.

B:

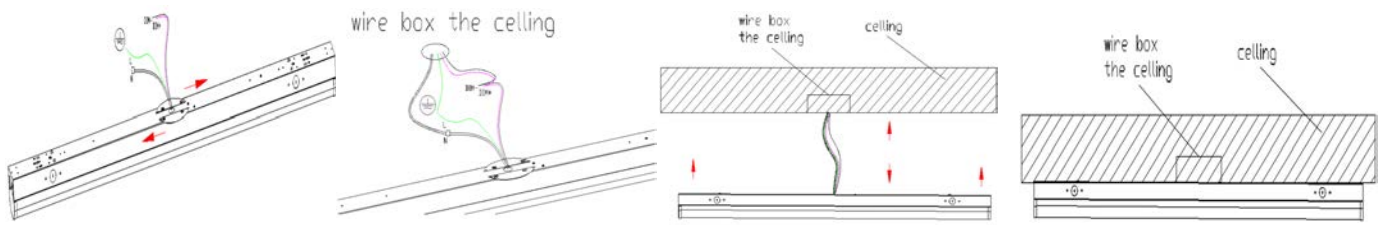


1. Lock the mounting plate.
2. Connect AC wire and dimming wire
3. Lift up the fixture and put wires into box.
4. Lock the fixture by nail.

C: T-Bar clip mounting

Fix fixture to T-bar ceiling grid with T-bar clips which are provided by customer  
Refer to the left drawing; fix-bar clips on Position "C".

D: Connect in series

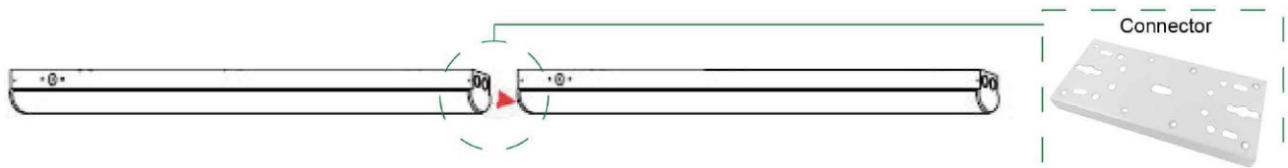

## APPLICATIONS:

