



4FT T8 GLASS SINGLE OR DUAL-END HYBRID LED TUBE

HYPERIKON®

SPECIFICATIONS

Model Name	SKU	Wattage	Lumens	Efficacy	Kelvin	Cover	Type
Hyper4GAB-40C	841200742	18W	2,430 Lm	135 Lm/W	4000K	Clear	A+B
Hyper4GAB-50C	841200752	18W	2,430 Lm	135 Lm/W	5000K	Clear	A+B
Hyper4GAB-40F	842200742	18W	2,340 Lm	130 Lm/W	4000K	Frost	A+B
Hyper4GAB-50F	842200752	18W	2,340 Lm	130 Lm/W	5000K	Frost	A+B

FEATURES



Hybrid
BY or BC



Single or Dual
Powered



Voltage
100-277V



Base
G13



Beam Angle
350°



CRI
84+



Dimmer Not
Recommended




Temperature
-22 °F to 130 °F

- Suitable for damp locations outside as well as inside.
- This Hybrid tube is double certified and the UL certification number differs based on your installation preference (Type A & Type B).
- Made of superior durable glass.

MODEL DESIGN

8412007X2
Clear Lens

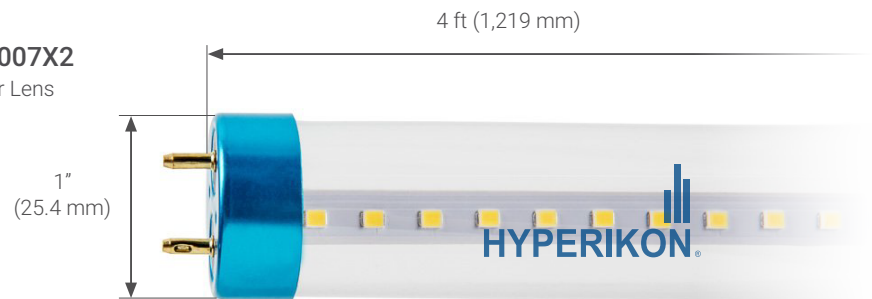

8422007X2
Frosted Lens



WARNINGS AND CAUTIONS

- Turn power off before inspection, installation or removal. Risk of electric shock - do not use where directly exposed to water or weather.
- This device is not intended for use with emergency exit fixtures or emergency exit lights.

(888) 846-4973
info@hyperikon.com
www.hyperikon.com
707 Broadway Suite 800
San Diego, CA 92101

