Mounting

Surface Mounting.

LED WRAPROUND LIGHT

PRODUCT FEATURES:

- Optical design, greatly improved the light utilization and evenness.
- ✤ High efficiency LED Driver.
- Sheet iron design, better cooling, light quality, LED Ti $< 85^{\circ}$ C.
- The 0-10V Dimming type is continuous.
- ✤ 42V PCB output voltage.
- The product can dim to 10%.

Additional Information:

- Input: AC 120-277V
- CCT: 3500K/4000K/5000K 0
- Light Source: SEOUL 0
- Driver: SIMON POWER \cap

The Wrapround LED Lighting Series can be widely used for Indoor Excellent for Offices, Hallways, Multipurpose Rooms, Office Buildings, Conference Rooms, super market, store and many other applications.

Specifications

Wrapround-4FT Length:1211.8MM(47.7'') Width: 180MM(7.1'') Depth:71MM(2.8'') Weight: 7.94 (lbs)

PRODUCT APPLICATIONS:

Packaging information

Inside the box:1235MMX186MMX76MM 48.6''X7.32''X3''

FC

carton:1250MMX326MMX207MM(A case of four) 49.2"X12.83"X8.15"


1211.8/47.7"

Wattage & CCT Field Adjustable

MODEL #	
PROJECT:	
NOTES:	
DATE:	
Prepared by:	







30W 35W 40W













Tel:469.857.5693




LED WRAPROUND LIGHT


Wattage & CCT Field Adjustable

TECHNICAL PARAMETERS:

Туре	RP4FT303540W-3545K			
Power	30W/35W/40W	Lighting Angle	101°	
Input Voltage	AC120-277V	LED Brightness Decay	<5%/6000 hrs	
PF	>0.98	Working Life	>75000 hrs	
Driver Efficiency	>90%	Working Temperature	-20 - +50℃	
Luminous Flux	4110Lm / 4690Lm / 5240 Lm	Storage Temperature	-20 -+50℃	
Color Temperature	3500K/4000K/5000K	Protection Level	Damp	
CRI	Ra>80	Cable	Input Connect, No Cable	
Factory Setting	Power:40W	Color Temperature:4000K		

PHOTOMETRY:

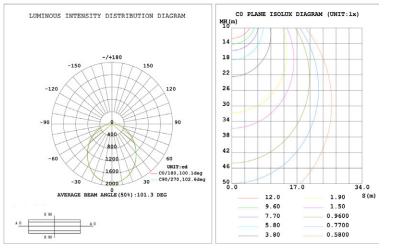

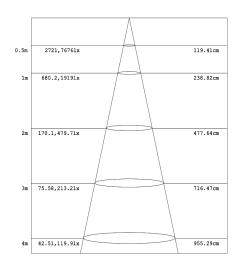

ORDERING EXAMPLE:RP4FT303540W-3545K

RP	4FT	303540W	ХХК
Product	Size	Power	ColorTemp
RP Led Wrapround Light	4 FT (4feet)	30W (30W) 35W (35W) 40W (40W)	35K (3500K) 40K (4000K) 50K (5000K)

W: www.wsdled.cc

30W 35W

40W




LED WRAPROUND LIGHT

Wattage & CCT Field Adjustable

Control Module:



The LED WRAPROUND LIGHT can adjust the power and color temperature of the whole lamp, which is convenient and fast. The power and color temperature can be selected according to the actual needs of customers. For example, if I want 35W power and 4000K color temperature, you need to shift the dial code switch to the middle position of the switch Greatly,meet the needs of customers.

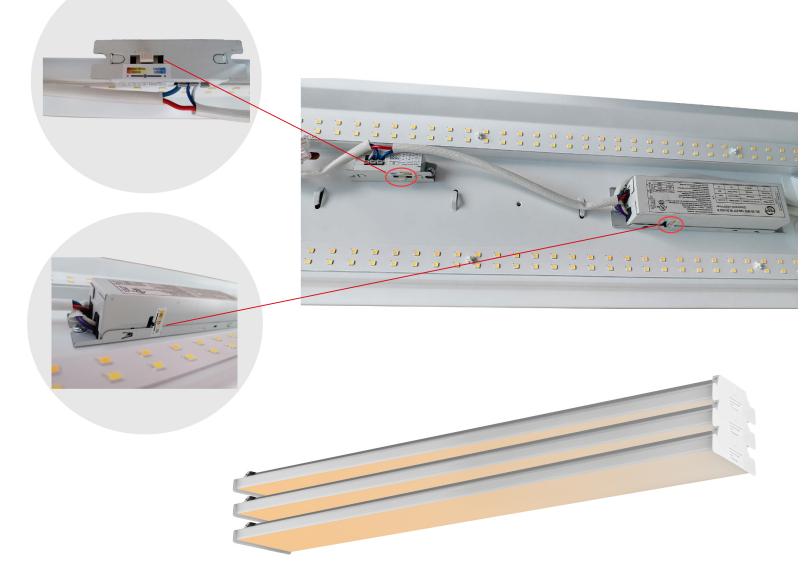

30W 35W

40W