





PRODUCT FEATURES:

- Optical design, greatly improved the light utilization and evenness.
- ❖ High efficiency LED Driver, voltage AC120-277.
- \diamond Cast Aluminum design, better cooling, light quality, LED Tj < 85°C.
- The 0-10V Dimming typel.
- Photocell Control (Optional).

MODEL # PROJECT: NOTES: DATE: PREPARED BY:

Additional Information:

Power: 70W

Input: AC 120-277V

o CCT: 4000K/5000K

o Output: 9131 LM

Light Source: LUMILEDS

Driver: NOVBO POWER





















PRODUCT APPLICATIONS:

The WALL PACK LED Lighting Series can be widely used for Indoor or Outdoor (Wet Location) Excellent for Museums, Art Galleries, Shopping Malls, Office Buildings, Walls and many other applications.





Structure Features:

Shell Materials: Aluminum & PC

Finish: Dark Bronze/White/black

Net Weight: 2.25KG (5.0 LBS)

Product Size: 280mm*216mm*112mm

Carton Size: 330mm*260mm*150mm





WALL PACK LIGHT

TECHNICAL PARAMETERS:

Туре	WSD-SWP07W27-XXK-Z-Y					
Power	70W	Lighting Angle	87°			
Input Voltage	AC120-277V	LED Brightness Decay <5%/6000 hrs				
PF	>0.98	Working Life	>75000 hrs			
Driver Efficiency	>90%	Working Temperature -30 - +45℃				
Luminous Flux	9131 Lm	Storage Temperature -40 -+80℃				
Color Temperature	4000K/5000K	Protection Level Wet Location				
CRI	Ra>80	Cable	Input Connect, No Cable			

PHOTOMETRY:

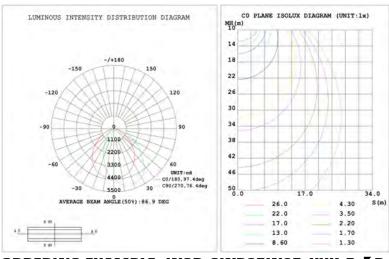



ORDERING EXAMPLE: WSD-SWP07W27-XXK-Z [D, W, B, S] -Y [blank, p]

WSD	07W	SWP	27	ххк	Z	Y
Company	Power	Product	Voltage	ColorTemp	FINISH	Control
WSD LED INC	07W (70W)	SWP Slim Adjustable Wall Pack	27 AC120-277V	40K (4000K) 50K (5000K) ± 500K	D (Dark Bronze) W (White) B (Black) S (Silvery)	P Photocell MODEL:JL-413C