







# LED Bollard Light

## Instruction Manual


### Installation Instructions

Packing List		
	Base plate templates	1PCS
	Screw fixing plate	1PCS
	Screw M5*16	5PCS
	Screw M8	3PCS
	Nut M8	3PCS

AC 100-240V / AC 220-240V  
AC / 120-277V / 50/60Hz







0.9M




0.5M

### Physical Dimensions(mm/inch)

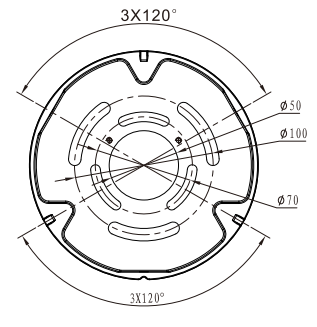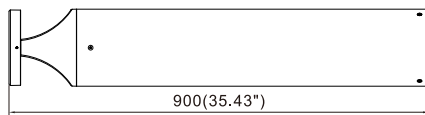



### The installation


①

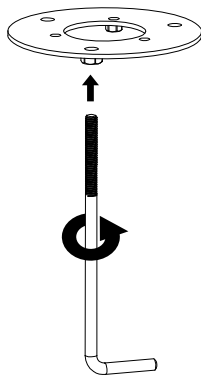


②

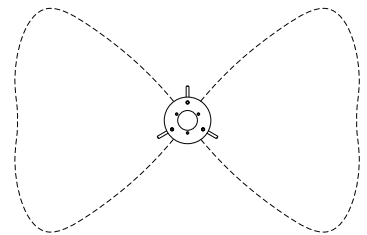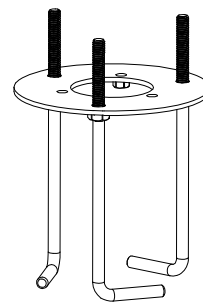

③





④



# LED Bollard Light

## Instruction Manual

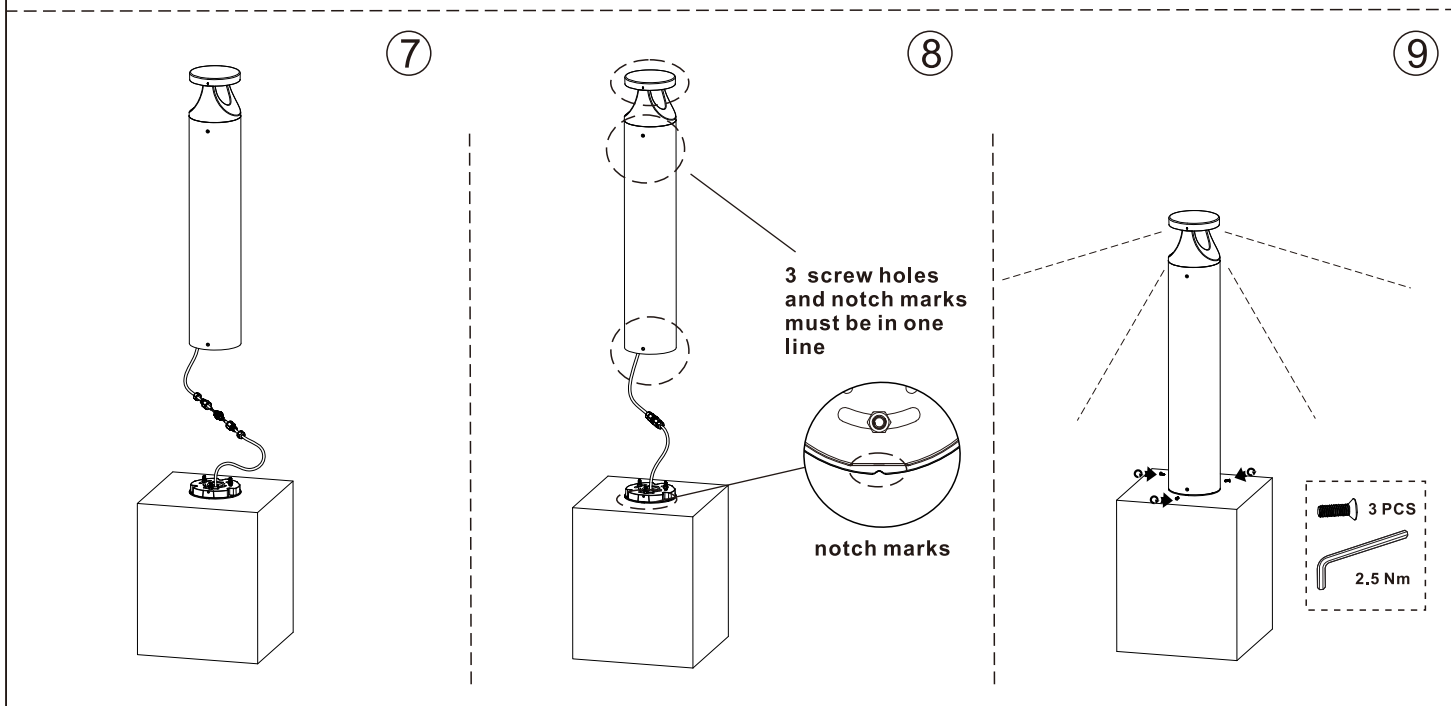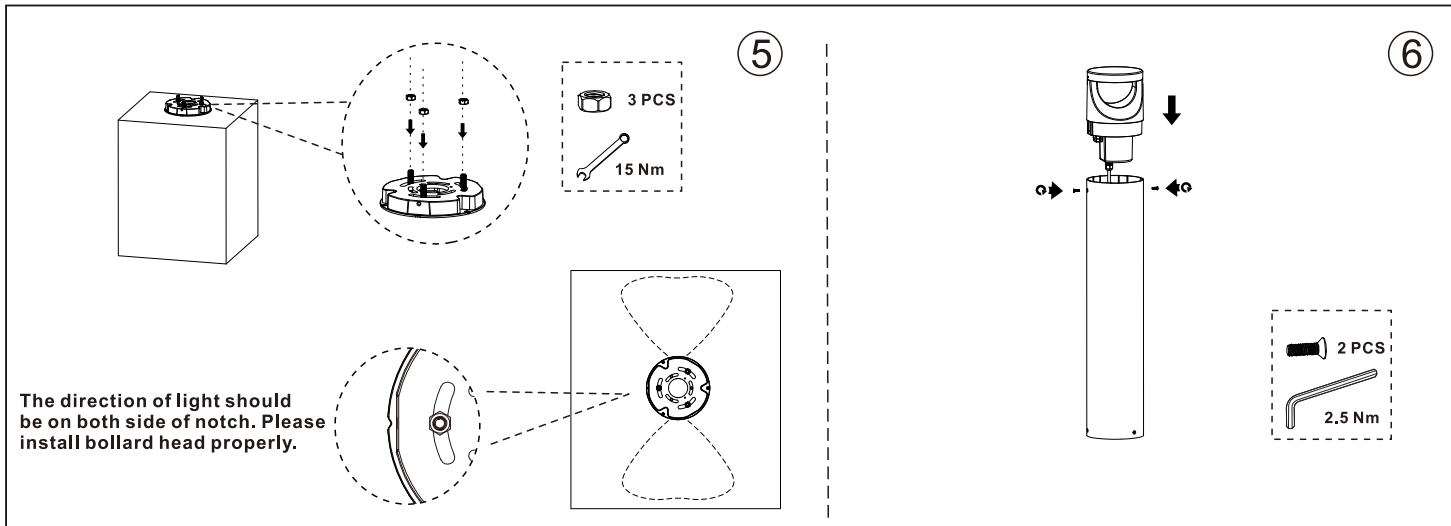

Product Specifications	14W		24W	
Input Voltage	AC 100-240 V/220-240V/120-277VAC			
Power Frequency	50 / 60 Hz			
Size(L x W x H)	Ø165×500mm (Ø6.5"×19.69")	Ø165×900mm (Ø6.5"×35.43")	Ø165×500mm (Ø6.5"×19.69")	Ø165×900mm (Ø6.5"×35.43")
Weight(Driver included)	4.5±0.3kg (9.92±0.66Lbs)	6.16±0.3kg (13.58±0.66Lbs)	4.5±0.3kg (9.92±0.66Lbs)	6.16±0.3kg (13.58±0.66Lbs)
Working Temperature	-30°C to + 50°C(-22°F to +122°F)			
Storing Temperature	-40°C to + 70°C(-40°F to +158°F)			

L	brown	black	Dimmable				
N	blue	white	DIM+ / DA1	blue	brown	purple	white
Ⓞ GND	yellow/green	green	DIM- / DA2	white	blue	gray	black

- This luminaire can be outdoor use.
- The light source contained in this luminaire shall only be replaced by the manufacturer or his service agent or a similar qualified person.
- if the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.