

IMPORTANT!

This electric kit has to be installed by a professional workshop or a suitable qualified person.

The installation instructions must have been read and fully understood before the start of any installation. Please contact your wiring kit provider or the hotline shown in the footer should vou need assistance!

Make sure the vehicle is approved/homologated by the manufacturer to tow a trailer!

Also please check that there is a definite compatibility between this vehicle and the electric kit!

Following the installation of the electric kit, the fitting instructions should be kept together with the vehicle service document and vehicle handbook. The fitting instructions contain important information relating to the use and function of the towing kit as well as for any diagnostic or activation process, that might have to be repeated in the future (e.g. after the performance of a vehicle software update).

All warranty claims will be forfeited if the electric kit or components contained therein are used incorrectly or modified. If a towing socket adaptor has been used to connect to the trailer or bike rack, this must be removed from the trailer socket once the trailer or bike rack has been disconnected

If the trailer or bike rack is not equipped with a rear fog lamp, depending on the towing vehicle type, the correct function of the towing kit cannot be guaranteed. In such cases, a rear fog lamp should be retro fitted.

This towing electric kit will not be covered under warranty if any technical or electrical modifications or software updates have been performed by the vehicle manufacturer after the initial commissioning of the kit. That applies especially to modifications or updates which may cause malfunctions in the trailer socket or any other part of the trailer electrical equipment!

Depending on the type of trailer module used in this electric kit, diagnostic interrogation with the vehicle's electrical system may be limited or will not function. The error memory inside the trailer module may not be able to be accessed by vehicle manufacturers diagnostic system.

Error logs relating to the trailer electrical equipment, that may be generated in the vehicle manufacturers diagnostic system as a result of a test procedure, may be due to the incorrect installation of the towing electric kit or the false activation of the trailer module.

We always recommend whenever possible, the following troubleshooting process:

An analysis of the vehicle's error memory and possibly clearing of all faults before the start of the installation!

Try disconnecting the trailer module from the towing harness and re-start the fault clearing process!
If in doubt, limit the time for troubleshooting to a max of 0,5 hours and call our Technical Support Team!

Please follow our instructions carefully and always test the towing electrics using a true lighting board or a specifically designed bulb tester. If an LED tester is used, ensure it is equipped with correct load resistors or malfunctions will occur!

1/23

This instruction is subject to changes and we reserve the right to make changes to design, colour etc.


All of the data and illustrations may not be an exact representation but the text contained in this instruction must be observed!

ECS Electronics UK The Old Dyehouse Macclesfield Cheshire, SK11 7RN UK

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk

Email-sales: n.lea@ecs-electronics.com Email-technical: ts-uk@ecs-electronics.com

Revision: 4 / 09.06.2020 KI-132-07MU

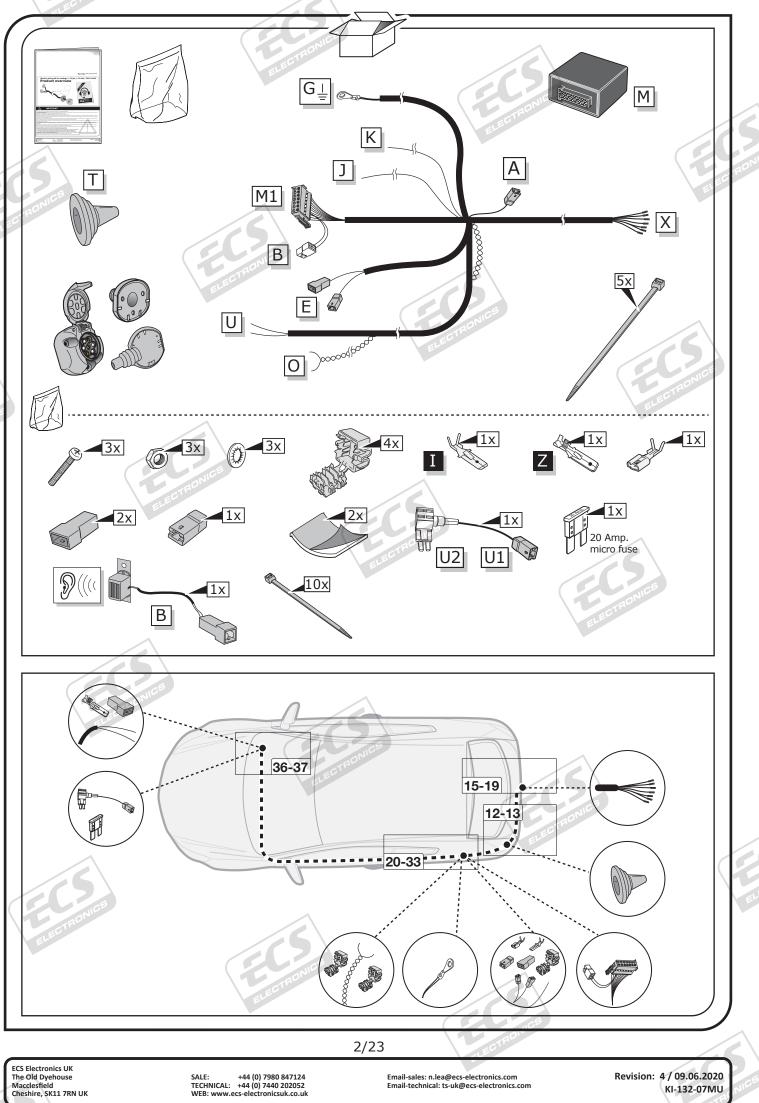

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk

KI-132-07MU

Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal lug Image: Second connection battery terminal	SYMBOL				
Pright (84) fail light geolessony socket 54 Image: Step light (84) Loudspeaker / buzzer Classing light (84) Turn signal indicator light Exercise light (84) Classing light (84) Rear fog light (84) Switch / source of function Permanent power supply/ Switch / source of function Exercise light (84) Permanent power supply/ Look at / See further information Exercise light (84) Permanent power supply/ Look at / See further information Cond connection battery terminal lug Present / Occupied / OK E Ground on Earth (31) Exercise light (84) E Positive connection battery terminal lug Present / Not occupied / OK OF Positive connection battery terminal lug Exercise light (84) Exercise light (84) E Positive connection battery terminal lug Exercise light (84) Exercise light (84) E Positive connection battery terminal lug Exercise light (84) Exercise light (84) E Positive connection battery terminal lug Exercise light (84) Exercise light (84) E Positive connection battery terminal lug Exercise light (84) Exercise light (84) E		EXPLANATION	ECTRONIC		
Jin Control for a signal indicator left Image: the signal indicator left Image: the signal indicator right Image: the signal indicator register Image: the signal indicator register Image: the signal indicator regi	- <u>Ö</u> -				
R Turn signal indicator right R Rear tog light(s) Rear tog light(s) Connect together Rear tog light(s) Disconnect Rear tog light(s) Present / Not occupied / OK Rear tog light(s) Rear tog light(s) Rear tog light(54 STOF	Stop light (high mounted, third	(54) / stop light (54)		Ectra Loudspeaker / buzzer
Rear fog light(s) Connect together Connect information Disconnect Connect inf		Turn signal ind	icator left		Park Distance Control
Image: Orgen Sector Reversing light(s) Image: Orgen Sector Permanent power supply / 13pin socket, chamber 9 Image: Orgen Sector Charging wire for trailer battery / 13pin socket, chamber 10 / 10 ///////////////////////////////		Turn signal indi	cator right	-/	Switch / source of function
Image: State of the second state of		Rear fog li	ght(s)	•	Connect together
13pin socket, chamber 9 Charging wire for trailer battery / 13pin socket, chamber 10 Image: Charging wire for trailer battery / 13pin socket, chamber 10 Image: Charging wire for trailer battery / 13pin socket, chamber 10 Image: Charging wire for trailer battery / 13pin socket, chamber 10 Image: Charging wire for trailer battery trailer bat	Reverse	0: Reversing I	ight(s)	•	Disconnect
13pin socket, chamber 10 Image: Construction of the selected and a selected	30+	Permanent pow 13pin socket, c	er supply / chamber 9	4	Look at / See further information
B+/30 Permanent current power supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply Image: Construction of the supply of the s	15+ •••	Charging wire for tr 13pin socket, cl	railer battery / hamber 10		Look carefully at selected area
⊥ Ground or Earth (31) ○ Ground connection battery terminal lug ③ Positive connection battery terminal lug ○		Trailer / trailer r	ecognition	V	Present / Occupied / OK
Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug Image: Construction battery terminal lug	B+/3	0 Permanent current	power supply	Xarab	Not present / Not occupied / Not OK
Image: Tools Tools Image: Tools Image: Tools <	<u> </u>	Ground or Ea	arth (31)	D((((Acoustic indication
Positive connection battery terminal lug Fuse / fuse capacity 20 Ampère TOOLS Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug TOOLS Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug TOOLS Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terminal lug Image: Connection battery terus Image: Connection terminal l	$\overline{\mathbf{\Theta}}$	Ground connection ba	ttery terminal lug	\triangle	Attention / important advice of PO
ATTENTION The vehicle's cooling capacity may have to be increased when retrofitting a trailer coupling! You must observe the manufacturer's instructions! Note: It may be necessary to check if this vehicle has a stored radio code before a stored rad	•	Positive connection ba	ttery terminal lug		Fuse / fuse capacity 20 Ampère
ATTENTION The vehicle's cooling capacity may have to be increased when retrofitting a trailer coupling! You must observe the manufacturer's instructions! Note: It may be necessary to check if this vehicle has a stored radio code before a stored rad					
ATTENTION The vehicle's cooling capacity may have to be increased when retrofitting a trailer coupling! You must observe the manufacturer's instructions!! Note: It may be necessary to check if this vehicle has some and the vehicle has to check if this vehicle has to ch	TOOLS	20NICS			
ATTENTION! The vehicle's cooling capacity may have to be increased when retrofitting a trailer coupling! You must observe the manufacturer's instructions!! Mote: It may be necessaryto check if this vehicle hasa stored radio code beforedisconnecting the battery! $Wote: It may be necessaryto check if this vehicle hasa stored radio code beforedisconnecting the battery!$				TO TROME O O	•
ATTENTION! The vehicle's cooling capacity may have to be increased when retrofitting a trailer coupling! You must observe the manufacturer's instructions!! Mote: It may be necessaryto check if this vehicle hasa stored radio code beforedisconnecting the battery! $Wote: It may be necessaryto check if this vehicle hasa stored radio code beforedisconnecting the battery!$					
You must observe the manufacturer's instructions!! Note: It may be necessary to check if this vehicle has a stored radio code before disconnecting the battery! Code 33 31 31 31 31 31 31 31 31 31					
to check if this vehicle has a stored radio code before disconnecting the battery!					
ATTENTIONI In order to avoid mal functions and domage to the vehicle's electrical system the south terminal must be			acity may have to be	increased when retr	
ATTENTION! In order to avoid mal-functions and damage to the vehicle's electrical system the earth terminal must be disconnected from the vehicle's battery before starting work!	ATTENTION		acity may have to be	increased when retrions!	be necessary is vehicle has o code before g the battery!
Both the trailer module and the vehicle's control unit for the electrical system can be damaged during work on the data bus connections if the battery is not disconnected!		You must observe the ma	eacity may have to be anufacturer's instruction of the second sec	A increased when retrions!!	be necessary is vehicle has o code before g the battery!
1 Please pay attention to the manufacturer's instructions when disconnecting and reconnecting the vehicle's batter	S S S	You must observe the ma	eacity may have to be anufacturer's instruction ions and damage to the hicle's battery before and d the vehicle's control of	A increased when retrions! Note: It may to check if th a stored radi disconnection C The vehicle's electrical s starting work! unit for the electrical s	be necessary is vehicle has o code before g the battery!
	S S S	You must observe the matrix You must observe the matrix You must observe the matrix II In order to avoid mal-funct disconnected from the vel Both the trailer module and on the data bus connection	eacity may have to be anufacturer's instruction ions and damage to the hicle's battery before and the vehicle's control of the battery is not of	A constraint of the electrical starting work!	be necessary is vehicle has o code before g the battery!

ECS Electronics UK The Old Dyehouse Macclesfield Cheshire, SK11 7RN UK

-

5

SALE: +44 (0) 7980 847124 TECHNICAL: +44 (0) 7440 202052 WEB: www.ecs-electronicsuk.co.uk Email-sales: n.lea@ecs-electronics.com Email-technical: ts-uk@ecs-electronics.com Revision: 4 / 09.06.2020 KI-132-07MU

5

