

Table top Thermostatic Gas Griddle

SPECIFICATION SHEET

MODEL#: EMTG SERIES



MODEL # EMTG-48M

Specifications

- Stainless steel body
- U shape high-power burner
- Itally SABAF thermostatic Gas Valve
- Temp range: 200°F-450°F
- 25mm/1 " thick griddle plate
- Brass Gas Valve from Alpha Brand
- Manual ignition
- Height Adjustable leg
- 3/4" rear gas connection
- With ETL approved

Choose GAS TYPE When Placing Order

- LPG**
Liquefied Propane Gas
- Town Gas**


Models in EMTG series

- EMTG-24M Gas Griddle**
- EMTG-36M Gas Griddle**
- EMTG-48M Gas Griddle**
- EMTG-60M Gas Griddle**

Accessories for Standard

- Adjustable bullet leg
- Convert kit from LPG and Town Gas

PRODUCT DIMENSION CHART

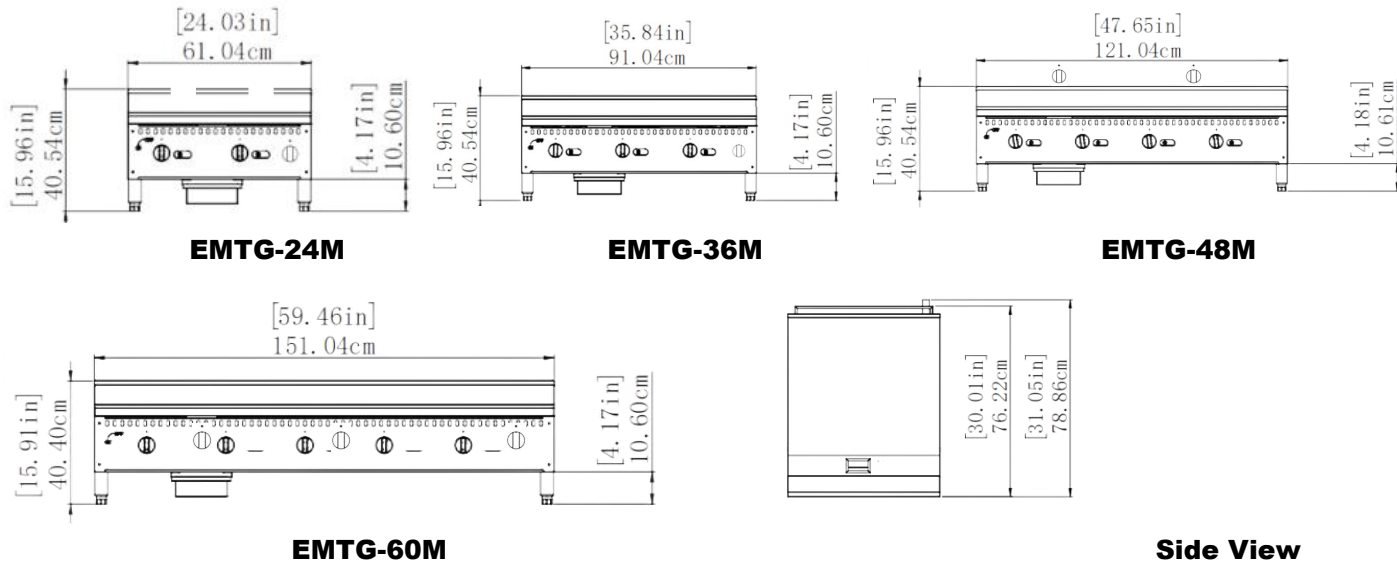

Key Parameters

Model	Product Dimension	Heat Power	Heating Burner	Gas Consumption	Gas inlet Connection	N.W	G.W	Packing dimension
EMTG-24M	24x29.05x15.96inch 610.4x738x405mm	60,000BTU	2	LPG: 0.68m3/h NG: 1.578m3/h	3/4" NPT Male	90.5kg	110.5kg	740X900X510mm
EMTG-36M	36x29.05x15.96inch 910x738x405mm	90,000BTU	3	LPG: 1.02m3/h NG: 2.367m3/h	3/4" NPT Male	129.5kg	156kg	1040X900X510mm
EMTG-48M	48x29.05x15.96inch 1210x738x405mm	120,000BTU	4	LPG: 1.36m3/h NG: 3.156m3/h	3/4" NPT Male	165kg	196kg	1345X900X510mm
EMTG-60M	60x29.05x15.96inch 1510x738x405mm	150,000BTU	5	LPG: 1.699m3/h NG: 3.946m3/h	3/4" NPT Male	204.5kg	242.5kg	1625X900X510mm