


ADDITIVES

ANTI-SKID AGGREGATES AND ADDITIVES




Anti-Skid coatings are used to improve the frictional characteristics of a surface whether it be a road, pathway, cycle path, floor, steps or any area where there is a risk of slipping or skidding. These coatings can involve the application of a layer of 'high friction' aggregate to the surface being treated. This aggregate is firmly bonded to the surface by a resin adhesive and with different combinations of resin and aggregate most performance requirements can be met. The aggregate can be bonded in systems such as SkidGrip X348 using PU resin, with thermoplastic sheets used in SkidGrip R140, or with MMA such as UltraForce or SkidGrip L246. Alternatively they can be mixed into paints and coatings such as UltraGrip L240 and MultiGrip, or scattered onto "wet" coats to increase skid resistance.

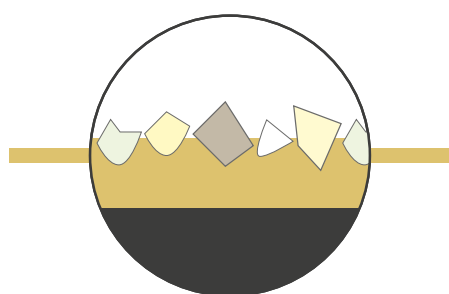


(A) BROADCAST

Broadcast grain or additives onto wet films for maximum slip resistance.

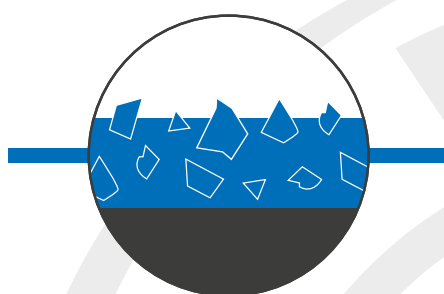

(B) MIXED


Mixed into product and also broadcast, for better durability and service life

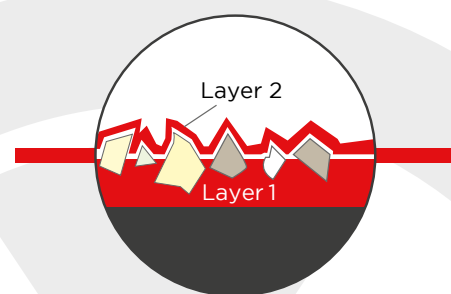

(C) ENCAPSULATED

Broadcast onto first layer of wet film. When dry recoat, encapsulating grain or additives

CONTACT US TO FIND OUT MORE OR BOOK A DEMONSTRATION WITH OUR TECHNICAL EXPERTS.

 CALL FREE: 0808 118 1922

 MEONUK.COM



MEON
DELIVERING GREAT SURFACES

TECHNICAL:

TYPE	GRAIN SIZE	USE	APPLICATION RATE(approx.)	PACKAGING	HARDNESS	PSV
Bauxite Buff - Ped Grade	0.9 -1.4mm	A	6kg/m ²	25kg bag	9 Moh	72
Bauxite Grey - Ped Grade	0.9 -1.4mm	A	6kg/m ²	25kg bag	9 Moh	72
Bauxite Buff - Traffic Grade	1 - 3mm	A	9kg/m ²	20kg bucket	9 Moh	72
Bauxite Grey - Traffic Grade	1 - 3mm	A	9kg/m ²	20kg bucket	9 Moh	72
Bold Red Aggregate	1 - 3mm	A	9kg/m ²	20kg bucket	7 Moh	66
Venetian Red Aggregate	1 - 3mm	A	9kg/m ²	20kg bucket	7 Moh	66
Blue Aggregate	1 - 3mm	A	9kg/m ²	20kg bucket	7 Moh	66
Emerald Green Aggregate	1 - 3mm	A	9kg/m ²	20kg bucket	7 Moh	66
Black Aggregate	1 - 3mm	A	9kg/m ²	20kg bucket	7 Moh	66
Calcined Flint	1 - 1.5mm	C	450g/m ²	25kg bag	6 - 7 Moh	78
Molochite	0.2 - 0.5mm	B or C	160g/m ²	3.2kg bucket	7 - 8 Moh	N/A
Glass Grain GEM500	90 - 1000 micron	A or C	250g/m ²	25kg bag	5 - 6 Moh	N/A
Glass Grain GEC850	425 - 1400 micron	A or C	500g/m ²	25kg bag	5 - 6 Moh	N/A

STORAGE:

STORAGE CONDITIONS:

Storage area should be dry, protected from direct sunlight and extremes of temperature - i.e. between 5°C and 20°C.

SHELF LIFE:

12 months when stored under cover, in original unopened containers, in accordance with Storage Condition guidelines listed above.

HEALTH AND SAFETY:

Familiarise yourself with the material safety data sheets before using this product. If you need a copy please call our technical team on **023 9220 0606**

MEON UK

+44 (0)23 9220 0606
 MAIL@MEONUK.COM
 MEONUK.COM

MEON IRELAND

+353 (0)1 840 7647
 INFO@MEONIRELAND.COM
 MEON.IE



MEON
 DELIVERING GREAT SURFACES