


BITUSEAL H560AEROSOL EDGE SEALER

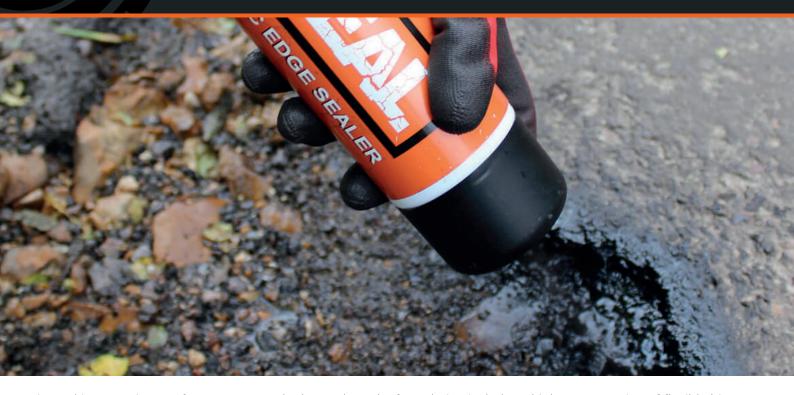

BituSeal is a premium performance aerosol edge sealant; the formulation includes a high concentration of flexible bitumens for ultimate long lasting results.

The product has been engineered to bond vertical connections between tarmac, concrete and ironworks. Primary area of use is for bonding utilities reinstatement cuts.

FEATURES AND BENEFITS

- · Fast curing to enable rapid reinstatement
- · Spray application for ease of use
- · Specially formulated to bond and seal
- Non-block nozzle to ensure all contents can be used





CONTACT US TO FIND OUT MORE OR BOOK A DEMONSTRATION WITH OUR TECHNICAL EXPERTS.



CALL FREE: 0808 118 1922





PREPARATION:

SURFACE PREPARATION:

Ensure the surface is dry and free from dust.

MIXING:

MIXING INSTRUCTIONS:

Shake the can vigorously upside down to mix the paint thoroughly (the balls should be heard clearly).

APPLICATION:

Apply evenly to surface; avoid over-application.

CURING:

Touch Dry: 5 mins

TECHNICAL:

COVERAGE:

Typically 1.6m² per 750ml can Equates to 32 linear metres of 50mm cut depth.

AFTERCARE AND MAINTENANCE:

Use Meon UltraClean X792 Aerosol or Meon UltraClean X792 to remove any uncured BituSeal from tools or equipment.

STORAGE:

STORAGE CONDITIONS:

Storage area should be dry, protected from direct sunlight and extremes of temperature - i.e. between 5°C and 20°C .

SHELF LIFE:


6 months when stored under cover, in original unopened containers, in accordance with Storage Condition guidelines listed above.

SIZES AVAILABLE:

Supplied in 750ml aerosol cans (12/box)

HEALTH AND SAFETY:

Familiarise yourself with the material safety data sheets before using this product. If you need a copy please call our technical team on 023 9220 0606.

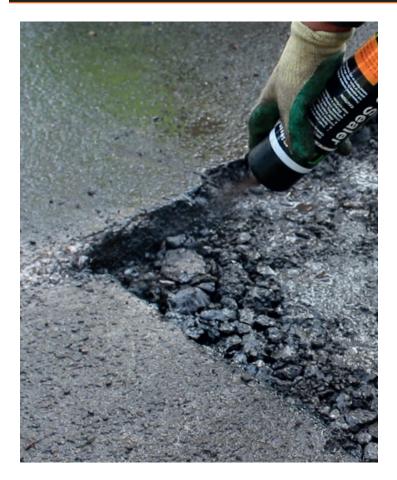

MEON UK





MEONUK.COM

MEON IRELAND

() + 353 (0)1 840 7647

■ INFO@MEONIRELAND.COM

MEON.IE

