

CYCLE LANE DELINEATORS


POSTS




Meon's range of Cycle Lane Delineators offer increased protection for cyclists from other vehicles, creating a physical barrier between the road and cycleway. The Delineator Posts are available in three different styles; Classic, Modern and Retro, with both the Classic and Modern styles having 3M reflective tape in white and red to improve the visibility in dark conditions. All our delineator products are made from recycled vulcanised rubber which means the posts are flexible up to 90° on impact. They are also very quick and easy to install either by concreting in, bolting onto the ground or bolting onto the Dividing Island with all posts standing 1150mm high from the road surface.

FEATURES AND BENEFITS

- 3M reflective tape for improved visibility
- Manufactured from recycled rubber
- Quick and easy installation
- Range of styles

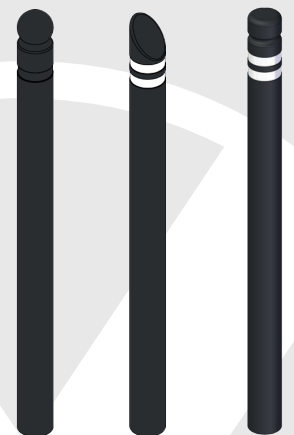

CONTACT US TO FIND OUT MORE OR BOOK A
DEMONSTRATION WITH OUR TECHNICAL EXPERTS.

 CALL FREE: 0808 118 1922

 MEONUK.COM



MEON
DELIVERING GREAT SURFACES

PREPARATION:

If concreting into the ground, the holes must be dug out 250mm deep prior to installation.

APPLICATION:

CONCRETING IN:

Place the post socket in the hole, making sure it is standing upright. Mix up concrete and place into the hole up to the road surface. We recommend using HardMaster W610. Do not open to traffic until concrete is cured.

BOLTING ONTO ROAD SURFACE:

Mark out position of post. Place the post base unit in position and mark out where the fixing holes are. Remove base unit and drill holes into the surface sufficient size to fit the bolt plug. Place bolt plugs into the holes. Before fixing the base unit to the surface, push the metal rod through the hole in the bottom of the post and then place the base unit over the post with the rod ensuring the post cannot be pulled out of the base unit. Install bolts through the base unit into the pre-drilled holes with plugs.

BOLTING ONTO DIVIDING ISLAND:

NOTE: Posts must be attached to Dividing Island before installing the Dividing Island. Place the post base unit in position and mark out where the fixing holes are. Remove base unit and drill holes through the Dividing Island at a sufficient size to fit the bolts through. Before fixing the base unit to the Dividing Island, push the metal rod through the hole in the bottom of the post and then place the base unit over the post with the rod ensuring the post cannot be pulled out of the base unit. Install bolts through the base unit and Dividing Island, and screw tight on the underside of the Dividing Island with the nuts provided.

TECHNICAL:

SIZES AVAILABLE:

Concrete in:	1400mm long, 100mm diameter, 12kg
Bolt to road:	1150mm long, 100mm diameter, 9.8kg
Bolt to Island:	1025mm long, 100mm diameter, 8.8kg

AFTERCARE AND MAINTENANCE:

The Delineation Units are resistant to weather conditions and do not require maintenance.

STORAGE AND PACKAGING:


STORAGE CONDITIONS:

Storage area should be dry and protected from extremes of temperature - i.e. between 5°C & 20°C.


HEALTH AND SAFETY:

Familiarise yourself with the application instructions before using this product. If you need a copy please call our technical team on 023 9220 0606.


DESIGNS:

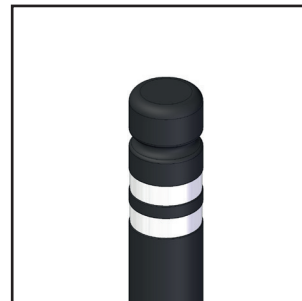

CLASSIC

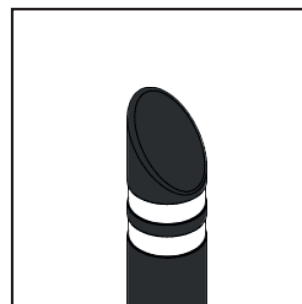

MODERN



RETRO

MEON UK

+44 (0)23 9220 0606
 MAIL@MEONUK.COM
 MEONUK.COM

MEON IRELAND

+353 (0)1 840 7647
 INFO@MEONIRELAND.COM
 MEON.IE



MEON
 DELIVERING GREAT SURFACES