

MULTIGRIP W248


WATER BASED SLIP RESISTANT PAINT



MultiGrip W248 is an environmentally friendly water based acrylic product for slip resistant area coatings. The water based formulation has very low odour which is ideal for applications in any indoor environment, and is also much safer than solvent based alternatives. MultiGrip W248 can be applied onto most typical internal surfaces including new asphalt (over 2 months old) as well as concrete and block paving, and is fully sprayable which allows for fast application and neat results. MultiGrip W248 is packaged in 6kg and 20kg tins, with a range of colours available.

FEATURES AND BENEFITS

- Can be applied directly onto concrete, block paving and new asphalt
- Excellent slip resistance - reducing slip risks for pedestrians
- Environmentally friendly - water based formulation
- Very low odour - ideal for internal applications
- Fully sprayable - fast and neat applications

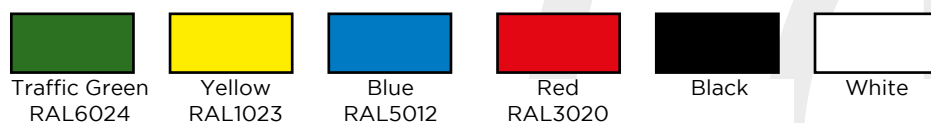

CONTACT US TO FIND OUT MORE OR BOOK A DEMONSTRATION WITH OUR TECHNICAL EXPERTS.

CALL FREE: 0808 118 1922

MEONUK.COM



MEON
DELIVERING GREAT SURFACES

PREPARATION:

Previously painted floors - As with all coating applications, suitable pre-treatment of the floor is of the utmost importance. Old paint, especially with suspect adhesion or of an unknown type, should be completely removed. Some paints may still lift, be softened, or cause poor inter-coat adhesion when this system is applied on top of them. So, it is always advisable on any surface to check for suitability and defects by undertaking small-scale trials. If the old paint is satisfactory, clean and abrade the surface in the normal way.

Heavily contaminated floors - MultiGrip W248 will not adhere satisfactorily to deposits of grease, oils etc. It will be necessary to mechanically abrade the floor to remove the excess contamination. Concrete - Should be clean, dry and free from dust, dirt, grease and other contaminants etc. Do not apply to newly laid concrete. Surfaces to be coated should be at least 4 weeks old and have a moisture content of less than 7%.

Asphalt - Should be clean, dry and free from dust, dirt, grease and other contaminants etc. Surfaces to be coated should be at least 8 weeks old.

Please note that any smooth/polished surface will require special preparation; please call or email pictures of your specific situation and we will advise on recommended preparation procedure. Test trials should be carried out in the first instance on a small area.

PRIMERS:

Apply a thinned first coat. New surfaces must always have a thinned first coat.

MIXING:

Stir thoroughly before use.

Thinning: This product is supplied ready to use and does not need thinning, unless for priming. For priming, thin product 10% by volume with clean water.

APPLICATION:

Best results are obtained in warm (minimum 10°C and rising), dry conditions with a good through draught. For best finish, it is recommended the edges are masked off using **Meon ProGaff tape** and MultiGrip W248 applied with a roller, brush or airless spray machine. Airless spray application is recommended for best results.

CURING:

Surface Dry:	15 minutes
Full Cure:	2 hours
Overcoat/Seal:	2 hours

Technical data @ 20°C and 65% relative humidity.

TEMPERATURES:

The drying and curing process will slow down at low temperatures. Do not apply when ambient temperature falls below 10°C or relative humidity exceeds 85%.

TECHNICAL:

PRACTICAL COVERAGE:	Approx. 3m ² /kg
VOLUME SOLIDS:	50%
MASS SOLIDS:	60%
FLASH POINT:	N/A
GLOSS LEVEL:	Matt
SRV:	Up to 78
WFT:	300 microns Can be measured using a Meon Wet Film Thickness Gauge.

AFTERCARE AND MAINTENANCE:

Uncured MultiGrip W248 can be cleaned off equipment and tools using **Meon UltraClean W990.**

STORAGE AND PACKAGING:

STORAGE CONDITIONS:

Storage area should be dry, protected from direct sunlight and extremes of temperature - i.e. between 5°C & 20°C. If product is stored for more than 30 days, full and thorough mechanical mixing will be required before using.

SHELF LIFE:

12 months when stored under cover, in original unopened containers, in accordance with Storage Condition guidelines listed above.

SIZES AVAILABLE:

Supplied in 6kg and 20kg tins.

HEALTH AND SAFETY:

Avoid inhalation of vapours and contact with skin and eyes. Wear suitable protective clothing, gloves and eye/face protection. Take additional care when spraying under high pressure. Familiarise yourself with the material safety data sheets before using this product. If you need a copy please call our technical team on **023 9220 0606.**

MEON UK

+44 (0)23 9220 0606
 MAIL@MEONUK.COM
 MEONUK.COM

MEON IRELAND

+353 (0)1 840 7647
 INFO@MEONIRELAND.COM
 MEON.IE



MEON
 DELIVERING GREAT SURFACES