


# UNIPRIME X950

## ADHESION PROMOTER

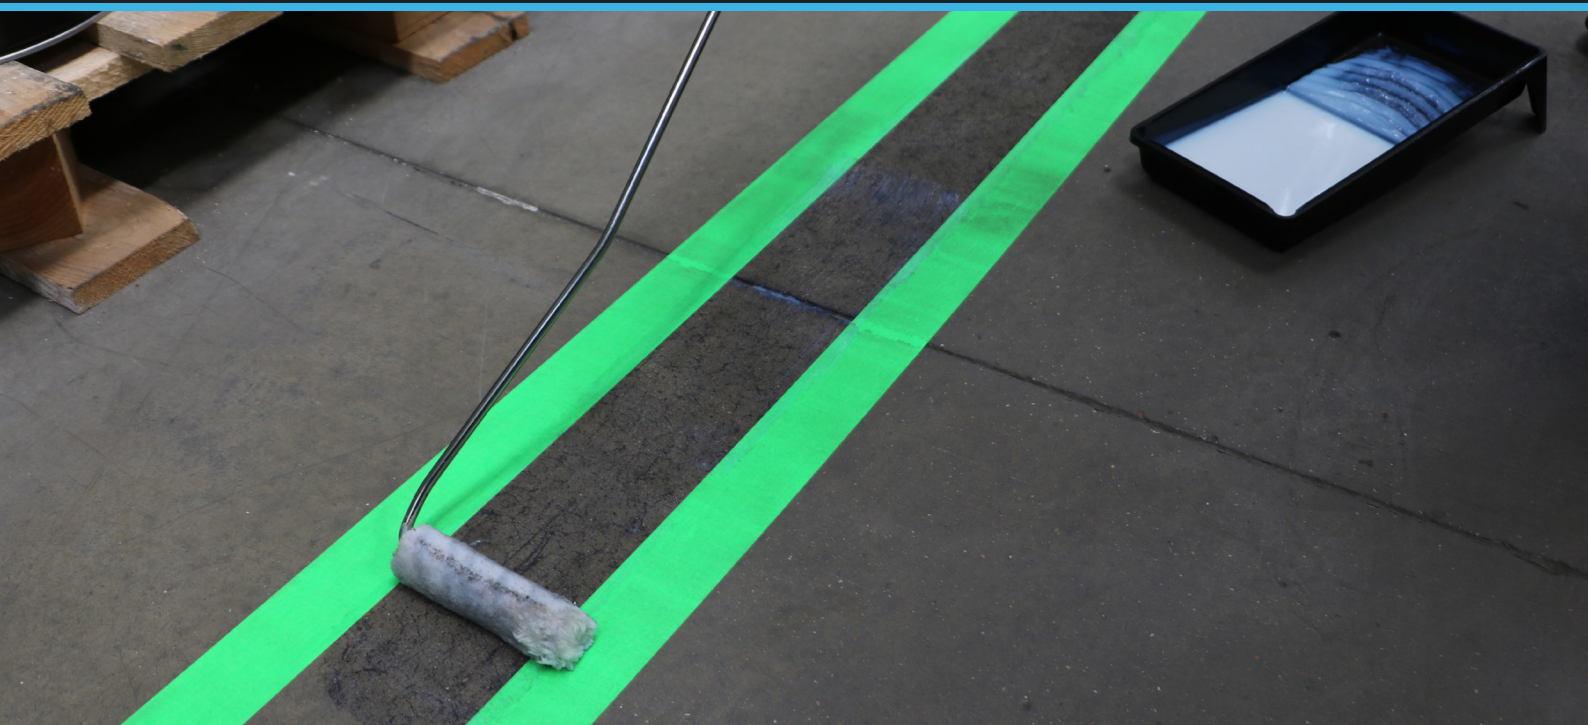

UniPrime X950 is a single pack adhesion promoter to improve the adhesion of a range of solvent based surface coatings over a wide range of difficult to adhere to non-porous substrates including power floated concrete, engineering, bricks, ceramics, aluminium, galvanising, as well as promoting intercoat adhesion between paint coatings.

### FEATURES AND BENEFITS


- Can be used on a wide range of smooth or polished surfaces
- Sprayable using airless spray equipment
- Suitable for flexible and rigid substrates
- Very quick drying times



Clear



CONTACT US TO FIND OUT MORE OR BOOK A DEMONSTRATION WITH OUR TECHNICAL EXPERTS.

 CALL FREE: 0808 118 1922

 [MEONUK.COM](http://MEONUK.COM)



**MEON**  
DELIVERING GREAT SURFACES

## PREPARATION:

The application surface should be sound and clean, free from laitance, grease, oil, rust, scale, dirt, or any other soiling that might affect adhesion or performance. All surfaces which are potentially contaminated must be cleaned down with **Meon UltraClean X795**.

Product performance will be enhanced if the substrate is lightly abraded prior to application of UniPrime X950.

## MIXING:

Stir product thoroughly using a mixing stick or mechanical mixing equipment before application.

## APPLICATION:

We recommend the use of airless spray equipment using a 311 tip at 800psi for 100mm line @ 150 WFT, increase the pressure to increase WFT. Roller or brushes can be also be used if spray equipment is not available. Care needs to be taken to avoid over application. Use the theoretical coverage rate to ensure over application does not occur.

Temperature: Do not apply when the air or surface temperature is below 5°C or less than 3°C above dew point, or if this is likely to occur during the curing period. Do not apply when there is rain, mist, fog, or snow imminent; when humidity is high or the surface is wet with condensation or likely to be during the drying period.

## CURING:

Touch Dry	Overcoat
3-5 minutes	10-15 minutes
Technical data @ 20°C and 65% relative humidity	

## TECHNICAL:

Typical Coverage	m <sup>2</sup> per litre	g/m <sup>2</sup>	100mm line per kit
	12.5m <sup>2</sup>	80g	625m

Film Thickness	WFT	DFT
	200	10

**Compatible Products:** All solvent-based products  
**Compatible Substrates:** Any substrate apart from stainless steel

## AFTERCARE AND MAINTENANCE:

Uncured UniPrime X950 can be removed from tools and equipment using **Meon UltraClean X792**.

## STORAGE AND PACKAGING:

### STORAGE CONDITIONS:

Storage area should be dry, protected from direct sunlight and extremes of temperature - i.e. between 5°C and 20°C.

### SHELF LIFE:

6 months when stored under cover, in original unopened containers, in accordance with Storage Condition guidelines listed above.

### SIZES AVAILABLE:

Supplied in 5 Litre tin.

## HEALTH AND SAFETY:

Avoid inhalation of vapours and contact with skin and eyes. Wear suitable protective clothing, gloves and eye/face protection. Take additional care when spraying under high pressure. Familiarise yourself with the material safety data sheets before using this product. If you need a copy please call our technical team on **023 9220 0606**.

### MEON UK

+44 (0)23 9220 0606  
 MAIL@MEONUK.COM  
 MEONUK.COM

### MEON IRELAND

+353 (0)1 840 7647  
 INFO@MEONIRELAND.COM  
 MEON.IE



**MEON**  
 DELIVERING GREAT SURFACES