

# HERRINGBONE SPECIFICATIONS

**Product Type:**

3/4" (19mm) Northern Solid Sawn® 3 layer Structured Tongue and groove with bevel on 4 sides

**Product Species:**

White Oak Plain Sawn

**Product Textures & Gloss:**

Smooth: Pearl & UVF  
Wire Brushed: UVF  
Sculpted: UVF

**Product Lengths:**

Select-V 14.68" (373mm)  
Character 30" (762mm)

**Product Grade & Width:**

Select-V 3 1/4" x 14.68", Character 5" x 30"

Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

**Face lamella:**

4 mm sawn hardwood

**Core layer:**

13 mm SPF finger core, predominantly Qtr. Sawn

**Back layer:**

2 mm wood veneer

**Sanding:**

Can be professionally sanded 3-4 times

**Radiant Heat:**


Approved over Radiant heat

**Installation Method:**

Glue down

**Subfloor:**

Plywood or concrete

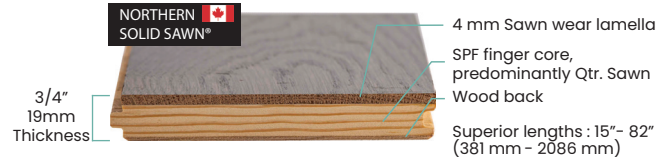


Relative Humidity Chart



Floated installation relative humidity warranty is 30 - 60%

Installation methods



Consult Vintage's Radiant Heat compliance information at [vintageflooring.com](http://vintageflooring.com)



PATTERNS



HERRINGBONE  
3 1/4" X 14.68", 5" X 30"

DOUBLE HERRINGBONE  
3 1/4" X 14.68", 5" X 30"

BASKET  
5" X 30"

FENCE  
5" X 30"

BRICK  
3 1/4" X 14.68", 5" X 30"

CUBE  
5" X 30"



**LIFETIME**  
stability warranty

**LIFETIME**  
structural warranty

**35 YEARS**  
residential wear warranty

**3 YEARS**  
commercial wear warranty