

WIRE BRUSHED SPECIFICATIONS

Product Type:

3/4" (19mm) Pioneered® solid
 3/4" (19mm) Northern Solid Sawn® Structured
 3/4" (19mm) Northern Solid Sawn® Structured Chevron
 3/4" (19mm) Northern Solid Sawn® Structured Herringbone
 3/4" (19mm) Solid Sawn® Structured
 Tongue and groove with bevel on 4 sides

Product Species:

Black Walnut, Red Oak, White Oak plain sawn & Rift & Qtr. Sawn

Product Gloss:

UVF

Product Lengths:

Pioneered® solid Select-V: 12" - 79" Average 32" (305 mm - 2007 mm Ave 813 mm)
 Pioneered® solid Character: 12" - 79" Average 32" (305 mm - 2007 mm Ave 813 mm)
 Northern Solid Sawn® Select-V Plain Sawn: 3 1/4", 4 3/8" 15" - 70" Average 33" (373 mm - 1778 mm Ave 838 mm)
 Northern Solid Sawn® Select-V & Character Rift & Qtr. Sawn 5", 6 1/2": 20" - 82" Ave 42" (511 mm - 2086 mm Ave 1067 mm)
 Northern Solid Sawn® Character Plain Sawn : 5", 6 1/2", 7 3/4" 20" - 82" Average 42" (511 mm - 2086 mm Ave 1067 mm)
 Northern Solid Sawn® Chevron: Character 24.4" (620 mm)
 Herringbone: Select-V 14.68" (373mm), Character 30" (762mm)

Product Grade & Width:

Red Oak: Pioneered® solid Select-V 3 1/4", Character 4 1/4"
 Northern Solid Sawn® Select-V 3 1/4", Character 5", 6 1/2", 7 3/4"
 White Oak: Northern Solid Sawn® Plain Sawn Select-V 3 1/4", Rift & Qtr. Sawn 5", 6 1/2"
 Plain Sawn Character 5", 6 1/2", 7 3/4", Rift & Qtr. Sawn 5", 6 1/2"
 Chevron Character: 5" x 24.4"
 Herringbone Select-V 3 1/4", 14.68", Character 5" x 30"
 Solid Sawn® Character 7", 8"

Select-V: Color variation and naturally occurring characteristics, 1/4" sound filled knots, some voids are allowed. Splits, checks and knots on bevel are not part of this grade.

Character: Unlimited color variation and naturally occurring characteristics, sound filled knots (no limitation of knot size), checks and splits. Some voids are allowed.

Sanding:

Can be professionally sanded 3-4 times

Radiant Heat:


Pioneered®: Not approved over Radiant heat
 Northern Solid Sawn®: Approved over Radiant heat

Installation Method:

Pioneered® solid: Nail down on plywood at or above ground level
 Northern Solid Sawn® Plank: Nail, glue or float at, above or below grade
 Chevron & Herringbone: Glue

Subfloor:

Plywood

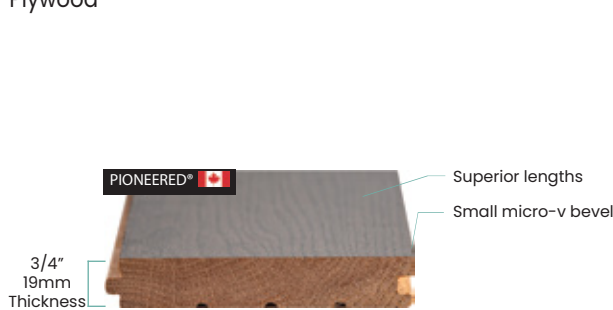

Relative Humidity Chart




Installation methods



LIFETIME
stability warranty

LIFETIME
structural warranty

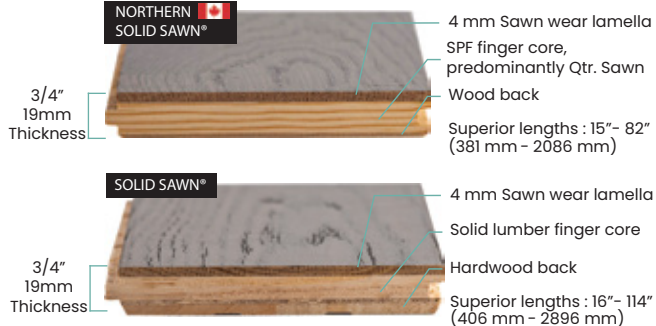

Relative Humidity Chart



Installation methods



Flotted installation relative humidity warranty is 30 - 60%

Consult Vintage's Radiant Heat compliance information at vintageflooring.com

35 YEARS
residential wear warranty

3 YEARS
commercial wear warranty