
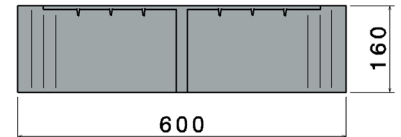




Mailbox
Stamford Products Limited

C2L
800 x 600 mm

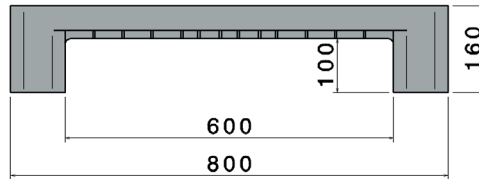

Please visit: www.mailboxproducts.co.uk

Technische Daten ^{*1}		
Dimensions L x W x H (mm)	800 x 600 x 160	
Weight (kg)	9.0	
Material ^{*3}	HDPE, Virgin material	
Load capacity (kg) ^{*2}	Static 2000	Dynamic 500
		In racking system —
Characteristics	Options	
Colour: light grey Runners: 2, unwelded Rims: 7 mm Temperatur stability: -30 °C to +40 °C, briefly up to +90 °C	Central box retainers Rims Antislip	
Loading quantities (pcs/approx.)		
Container	Container 20': 384 Container 40': 780	Container 40' High Cube: 880 Conventional trailer 45' high cube container: 1020
Truck	MEGA-Trailer : 1224	Jumbo: 1368
Labelling options		
Customised printing and numbering available on request depending on quantity. Position upon consultation.		



^{*1} All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

^{*2} **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

Dynamic load: on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

In racking system: evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over 100 h at a room temperature of approx. 20°C.

^{*3} Although still within ISO compulsory range, the load-bearing test results using pallets made from regranulated material show slightly more variation than those from virgin HDPE.

T: +44 (0)161 330 5577
F: +44 (0)161 330 5576
E: sales@mailboxproducts.co.uk

Mailbox: Stamford Products Limited
Bayley Street, Stalybridge, Cheshire.
SK15 1QQ. United Kingdom.