


Image shows 3 runner version



**Mailbox**  
Stamford Products Limited





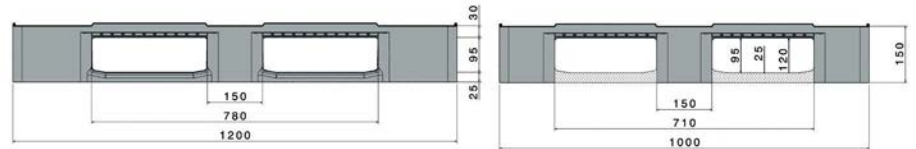




# C3RLL

1200 x 1000mm



Please visit: [www.mailboxproducts.co.uk](http://www.mailboxproducts.co.uk)

## Technical data <sup>\*1</sup>

Dimensions L x W x H (mm)	1200 x 1000 x 150						
Weight (kg)	15.0						
Material* <sup>2</sup>	HDPE, Regranulated material						
Load capacity (kg)* <sup>3</sup>	<table border="0"> <tr> <td> Static</td> <td>5000</td> <td> Dynamic</td> <td>1000</td> <td> In racking system</td> <td>400</td> </tr> </table>	 Static	5000	 Dynamic	1000	 In racking system	400
 Static	5000	 Dynamic	1000	 In racking system	400		



## Characteristics

Colour: black  
Runners: 5, unwelded  
Rims: 7 mm  
Temperature stability: -30 °C to +40 °C, briefly up to +90 °C  
Manufactured from regranulated material of one single type

## Options


Transponder  
Reinforcement profiles  
Rim options  
Antislip

## Loading quantities (pcs/approx.)

 Container	Container 20': <b>140</b> Container 40': <b>330</b>	Container 40' High Cube: <b>365</b> Conventional trailer 45' high cube container: <b>416</b>
 Truck	MEGA-Trailer: <b>494</b>	Jumbo: <b>570</b>

## Labelling options

Customised printing and numbering available on request depending on quantity. Position upon consultation.



<sup>\*1</sup> All technical data include characteristic features, which have been tested under specially defined conditions. Varying data may result from different conditions of usage such as loading method, prevailing temperature and length of storage time. All data and specified information are subject to change without notice. Our service team is pleased to be at your disposal to check the special requirements of your individual application.

<sup>\*2</sup> Our service team is pleased to be at your disposal if you require exact information about material compositions.

<sup>\*3</sup> **Static load:** resistance to pressure on a flat ground surface and an evenly distributed load at a room temperature of approx. 20 °C.

**Dynamic load:** on a forklift with an evenly distributed load at a room temperature of approx. 20 °C.

**In racking system:** evenly distributed load (sacks) along the longitudinal sides. Resting on two supports for over **100 h** at a room temperature of approx. 20 °C.

**T:** +44 (0)161 330 5577  
**F:** +44 (0)161 330 5576  
**E:** [sales@mailboxproducts.co.uk](mailto:sales@mailboxproducts.co.uk)

**Mailbox: Stamford Products Limited**  
Bayley Street, Stalybridge, Cheshire.  
SK15 1QQ. United Kingdom.