


# 2-SPOOL ROLLING THREAD CARRIAGE FOR RBS


## RBS-TC2

The RBS-TC2 is a 2 spool thread carriage developed for use with the CRB RBS-Pro system. But it was also designed for compatibility with any Aluminum Power Wrapping unit on the market (PacBay, American Tackle, etc.)

## ASSEMBLY AND USE

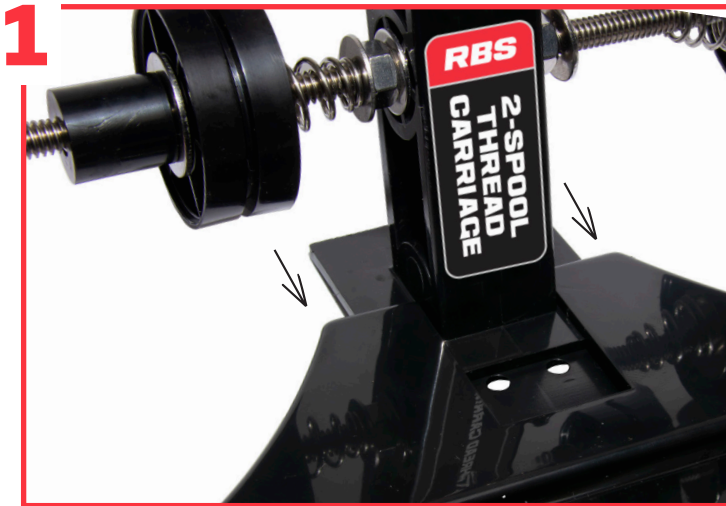

Some assembly is required. Simply slide the vertical upright portion of the unit into the back of the base section, then with the 2 supplied Phillips head screws, secure the units together.

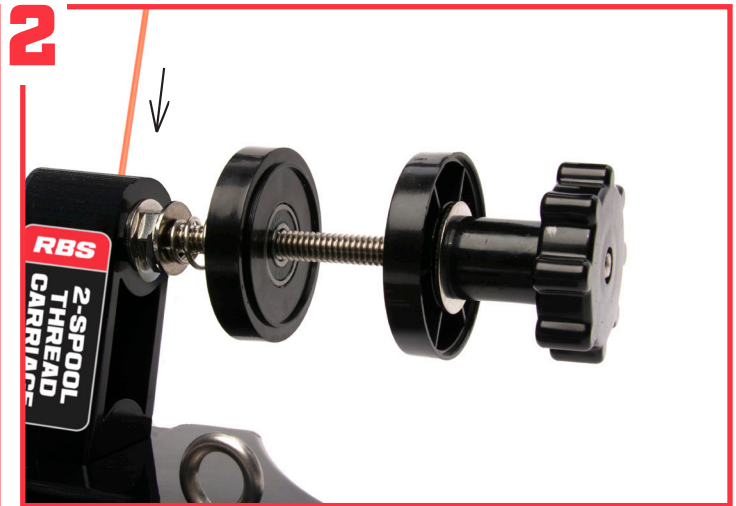

Start by installing the tension rod into the pre-drilled hole with the provided adhesive.

The "Thread Caps" are designed to hold both 100 yd and 1 oz. size spools. These caps are also designed with a ball bearing center to allow for the smoothest thread tensioning available. There is a spacer on each side to be utilized when using 100 yd. spools, but should be removed when using the 1 oz. spools. Also standard with this unit is the oversized locking knob, which makes fine tuning of tension a breeze.



On the base of the unit you will find 5 Eye bolts for directing the thread (threads) to your working area. You will also find two Neodymium Disc Magnets for holding small tools and a razor blade. Also incorporated into the base is a 2 1/2" X 1 1/4" indentation to hold small pieces like guides, tops, hook keepers etc.

**WITH THE COMBINATION OF CONICAL SPRING TENSION,  
AND THE BALL BEARING SPOOL CAPS, YOU WILL HAVE THE  
MOST ADVANCED THREAD TENSIONING DEVICE AVAILABLE!**

**CRBPRODUCTS.COM**