



Capacity from 15 kg to 60 kg



- SPECIAL STEEL
- COMBINED ERROR  $\leq \pm 0.02\%$
- PROTECTION CLASS IP65

CAPACITY	kg	ACCURACY CLASS C3				NET WEIGHT (kg)	CODE
15		•	•	•	•	0.28	SA15
30		•	•	•	•	0.28	SA30
60		•	•	•	•	0.28	SA60

ON REQUEST

### CERTIFICATIONS



OIML R60 C3



Complies with the Eurasian Custom Union standards

CERTIFICATIONS ON REQUEST



ATEX II 1GD (zone 0-1-2-20-21-22)



IECEX (zone 0-1-2-20-21-22)




Complies with the Eurasian Custom Union standards for use in potentially explosive atmospheres

### COMPLEMENTARY ACCESSORIES

	DESCRIPTION	CODE
	<p>Dimensions: M6x1</p> <p>Special steel ball-and-socket joint with nut.</p>	<p>Load cell capacity: 15 ÷ 60 kg</p> <p>EM6DADO</p>

### DIMENSIONS (mm)

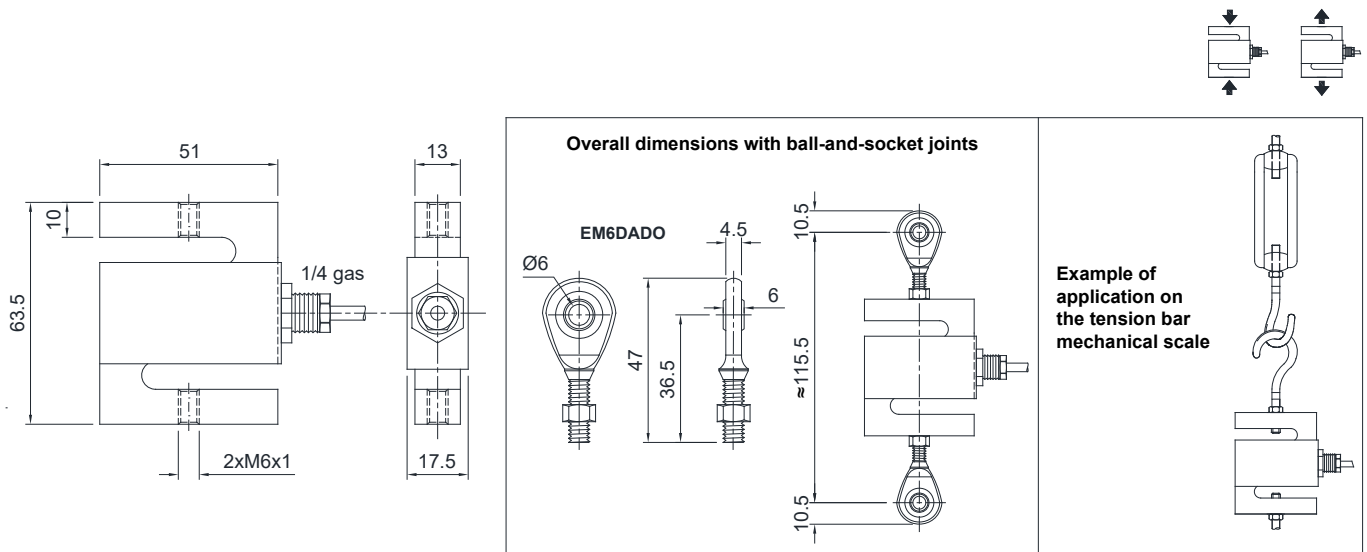

### TECHNICAL FEATURES

Material	Special steel		
OIML R60 Accuracy class • Verification intervals	C3 • 3000		
Nominal load (E max)	15 - 30 - 60 kg		
Minimum verification interval (V min)	E max / 8000		
Combined error	≤ ±0.02%		
Protection class	IP65		
Rated output	2 mV/V ±10%	Input resistance	381 Ω ±10
Temperature effect on zero	0.0017% °C	Output resistance	350 Ω ±10
Temperature effect on span	0.0013% °C	Zero balance	±1%
Compensated temperature range	-10 °C / +40 °C	Insulation resistance	>5000 MΩ
Operating temperature range	-20 °C / +60 °C	Safe overload (% of full scale)	120%
Creep at nominal load in 30 minutes	0.03%	Ultimate overload (% of full scale)	300%
Max supply voltage without damage	15 V	Deflection at nominal load	0.2 mm

### ELECTRICAL CONNECTIONS

Cable length	3 m
Cable diameter	4 mm
Cores	4 x 0.24 mm <sup>2</sup>



The Company reserves the right to make changes to the technical data, drawings and images without notice.