


Sprung[®]

Sprung[®] 6mm Vinyl Datasheet

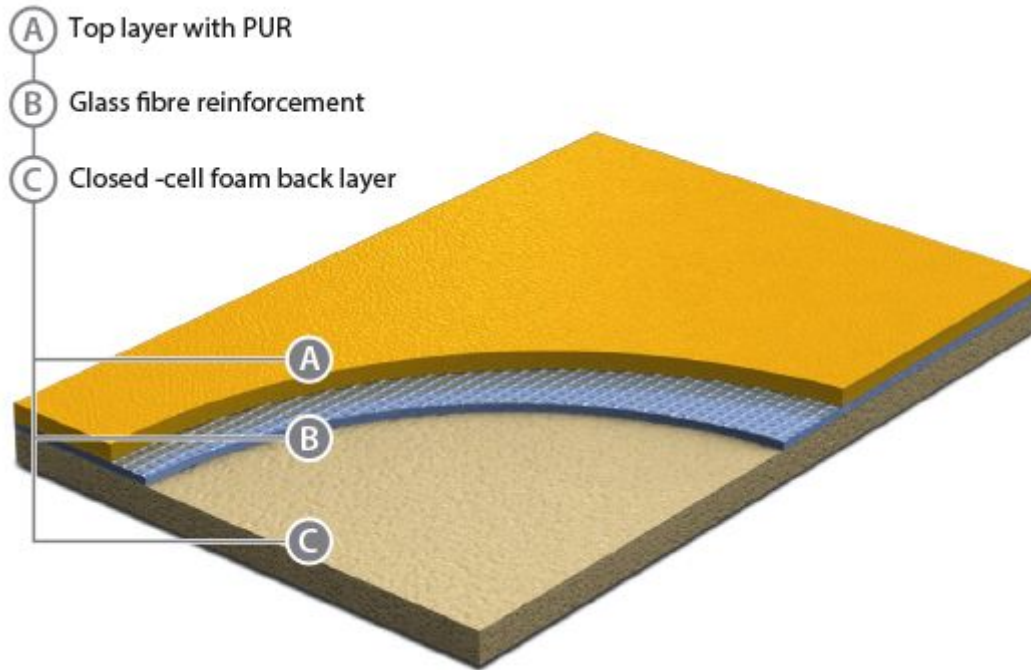

Specification

Description	
Surface:	PUR surface
Backing:	Closed Cell Double-Foam
Thickness:	6.0mm EN ISO 24346
Weight:	3.5kg/m ² EN ISO 23997
Width:	2m EN ISO 24341
Standard Roll Length:	15m + 10% EN ISO 24341
Maximum Roll Length:	25m EN ISO 24341

Classification	
Specification:	EN 14904
Thermal Resistance:	0.05m2 K/W
Reaction to fire:	EN 13501
Formaldehyde Emission:	None
Pentachlorophenol:	None
Sport Properties	
Friction:	EN 13036-4 - 80-110
Shock Absorption:	EN 14808 - 18%
Ball Rebound:	EN 12235 - 98%
Specular Gloss:	EN 2813 - < 30%
Technical Characteristics	
Dimensional Stability:	EN ISO 23999 - + 0.2%
Indentation Resistance:	EN 1516 - < 0.23mm
Colour Fastness:	ISO 105 B02 - 6
Chemical Resistance:	EN ISO 26987 - No change
Abrasion Resistance:	EN660-1 T

Environmental Attributes	
Solvent and heavy metal free	