


## Sprung<sup>®</sup> 8mm Vinyl Datasheet

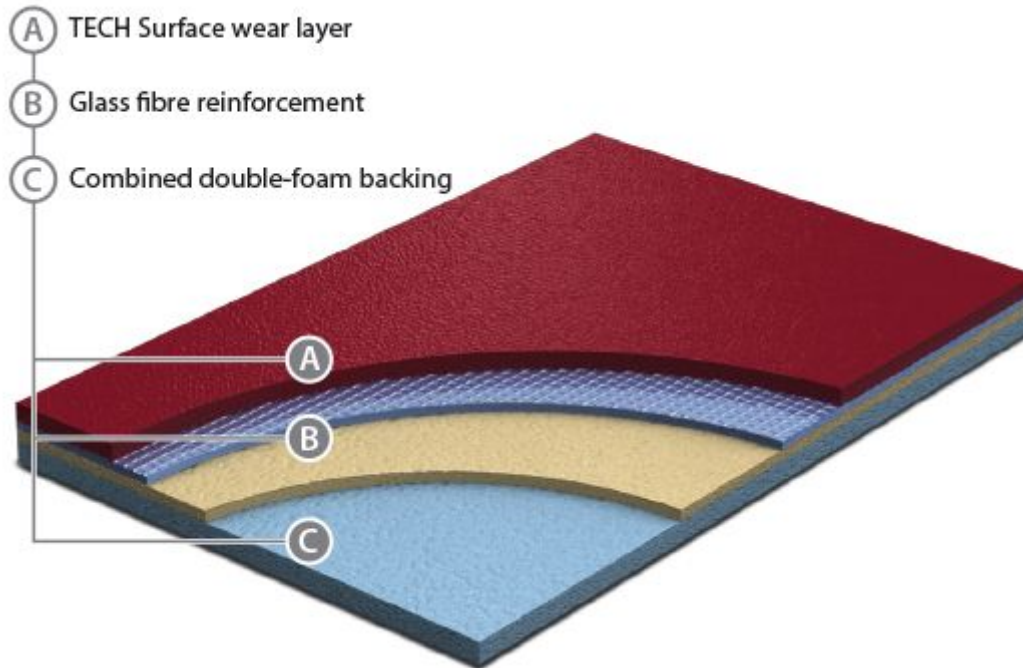

### Specification

<b>Description</b>	
<b>Surface:</b>	TECH surface
<b>Backing:</b>	Closed Cell Double-Foam
<b>Thickness:</b>	8.0mm EN ISO 24346
<b>Weight:</b>	4.3kg/m <sup>2</sup> EN ISO 23997
<b>Width:</b>	2m EN ISO 24341
<b>Standard Roll Length:</b>	15m + 10% EN ISO 24341

<b>Maximum Roll Length:</b>	<b>21m EN ISO 24341</b>
<b>Classification</b>	
<b>Specification:</b>	<b>EN 14904 - Category P1</b>
<b>Impact Sound Insulation:</b>	<b>EN 150717-2, 21db</b>
<b>Thermal Resistance:</b>	<b>0.08m<sup>2</sup> K/W</b>
<b>Reaction to fire:</b>	<b>EN 13501 cn-51</b>
<b>Formaldehyde Emission:</b>	<b>None</b>
<b>Pentachlorophenol:</b>	<b>None</b>
<b>Sport Properties</b>	
<b>Friction:</b>	<b>EN 13036-4 - 80-110</b>
<b>Shock Absorption:</b>	<b>EN 14808 - 31%</b>
<b>Vertical Deformation:</b>	<b>EN 14809 - 1.1mm</b>
<b>Ball Rebound:</b>	<b>EN 12235 - 98%</b>
<b>Specular Gloss:</b>	<b>EN 2813 - &lt; 30%</b>
<b>Technical Characteristics</b>	

**Dimensional Stability:**

**EN ISO 23999 - 10.2**

**Indentation Resistance:**

**EN 1516 - < 0.5mm**

**Resistance to rolling load:**

**EN 1569 - 1500N**

**Colour Fastness:**

**ISO 105 B02 - 6**

**Chemical Resistance:**

**EN ISO 26987 - No change**

**Abrasion Resistance:**

**EN ISO 5470-1 - < 250mg/1000 cycles**

**Environmental Attributes**

**FloorScore Certified:**

**SCS-EC10.2-2007**

**Solvent and heavy metal free**