



how to
make

Door Stop

#A541

DIFFICULTY ● ● ●

Approximate Time of project: 1 + hours

MATERIALS

25cm x 114cm fabric
Iron on interfacing
Polyester fill
Rice (uncooked for filling)
Two buttons
Door stop pattern

EQUIPMENT

Paper Scissors
Fabric Scissors
Pinking shears
Iron
Pins
Ruler
Tailors chalk
Sewing machine
Funnel

STEPS

1. Cut out all the template. Note: all pattern pieces include 1cm seam allowance.
2. Cut out all fabric and interfacing pieces as noted on the paper pattern pieces.
3. Iron the interfacing onto the wrong sides of the base, top, all the side fabric pieces and one side of the handle.
4. Place handle pieces right side together and sew down the long edges. Clip seams and turn inside out.
5. Place two side panels together and sew down one side. Repeat for other side panels.
6. Place stitched sides panels right sides together and sew down each side. All side panels should be sewn together now to create a pyramid shape.
7. Pin handle to the top panel and baste into place.
8. With right sides together pin top to the side panels.
9. Carefully sew the top to the sides. Clip the corners and seams.
10. With right sides together pin base panel to the side panels.
11. Carefully sew the base to the sides. Leave a small gap to allow for filling. Clip the corners and seams.
12. Turn doorstop inside out.
13. Fill half of the door stop with Polyester fill. Using the funnel fill the rest of the door stop with rice.
14. Stitch gap on the base closed with a slip/ladder stitch.



Print at "Actual Size" on your printer.

Test print this page first to ensure the scale is correct


**3x3cm
Square**

SIDE


CUT: 4xFABRIC

4xINTERFACING

Lincraft

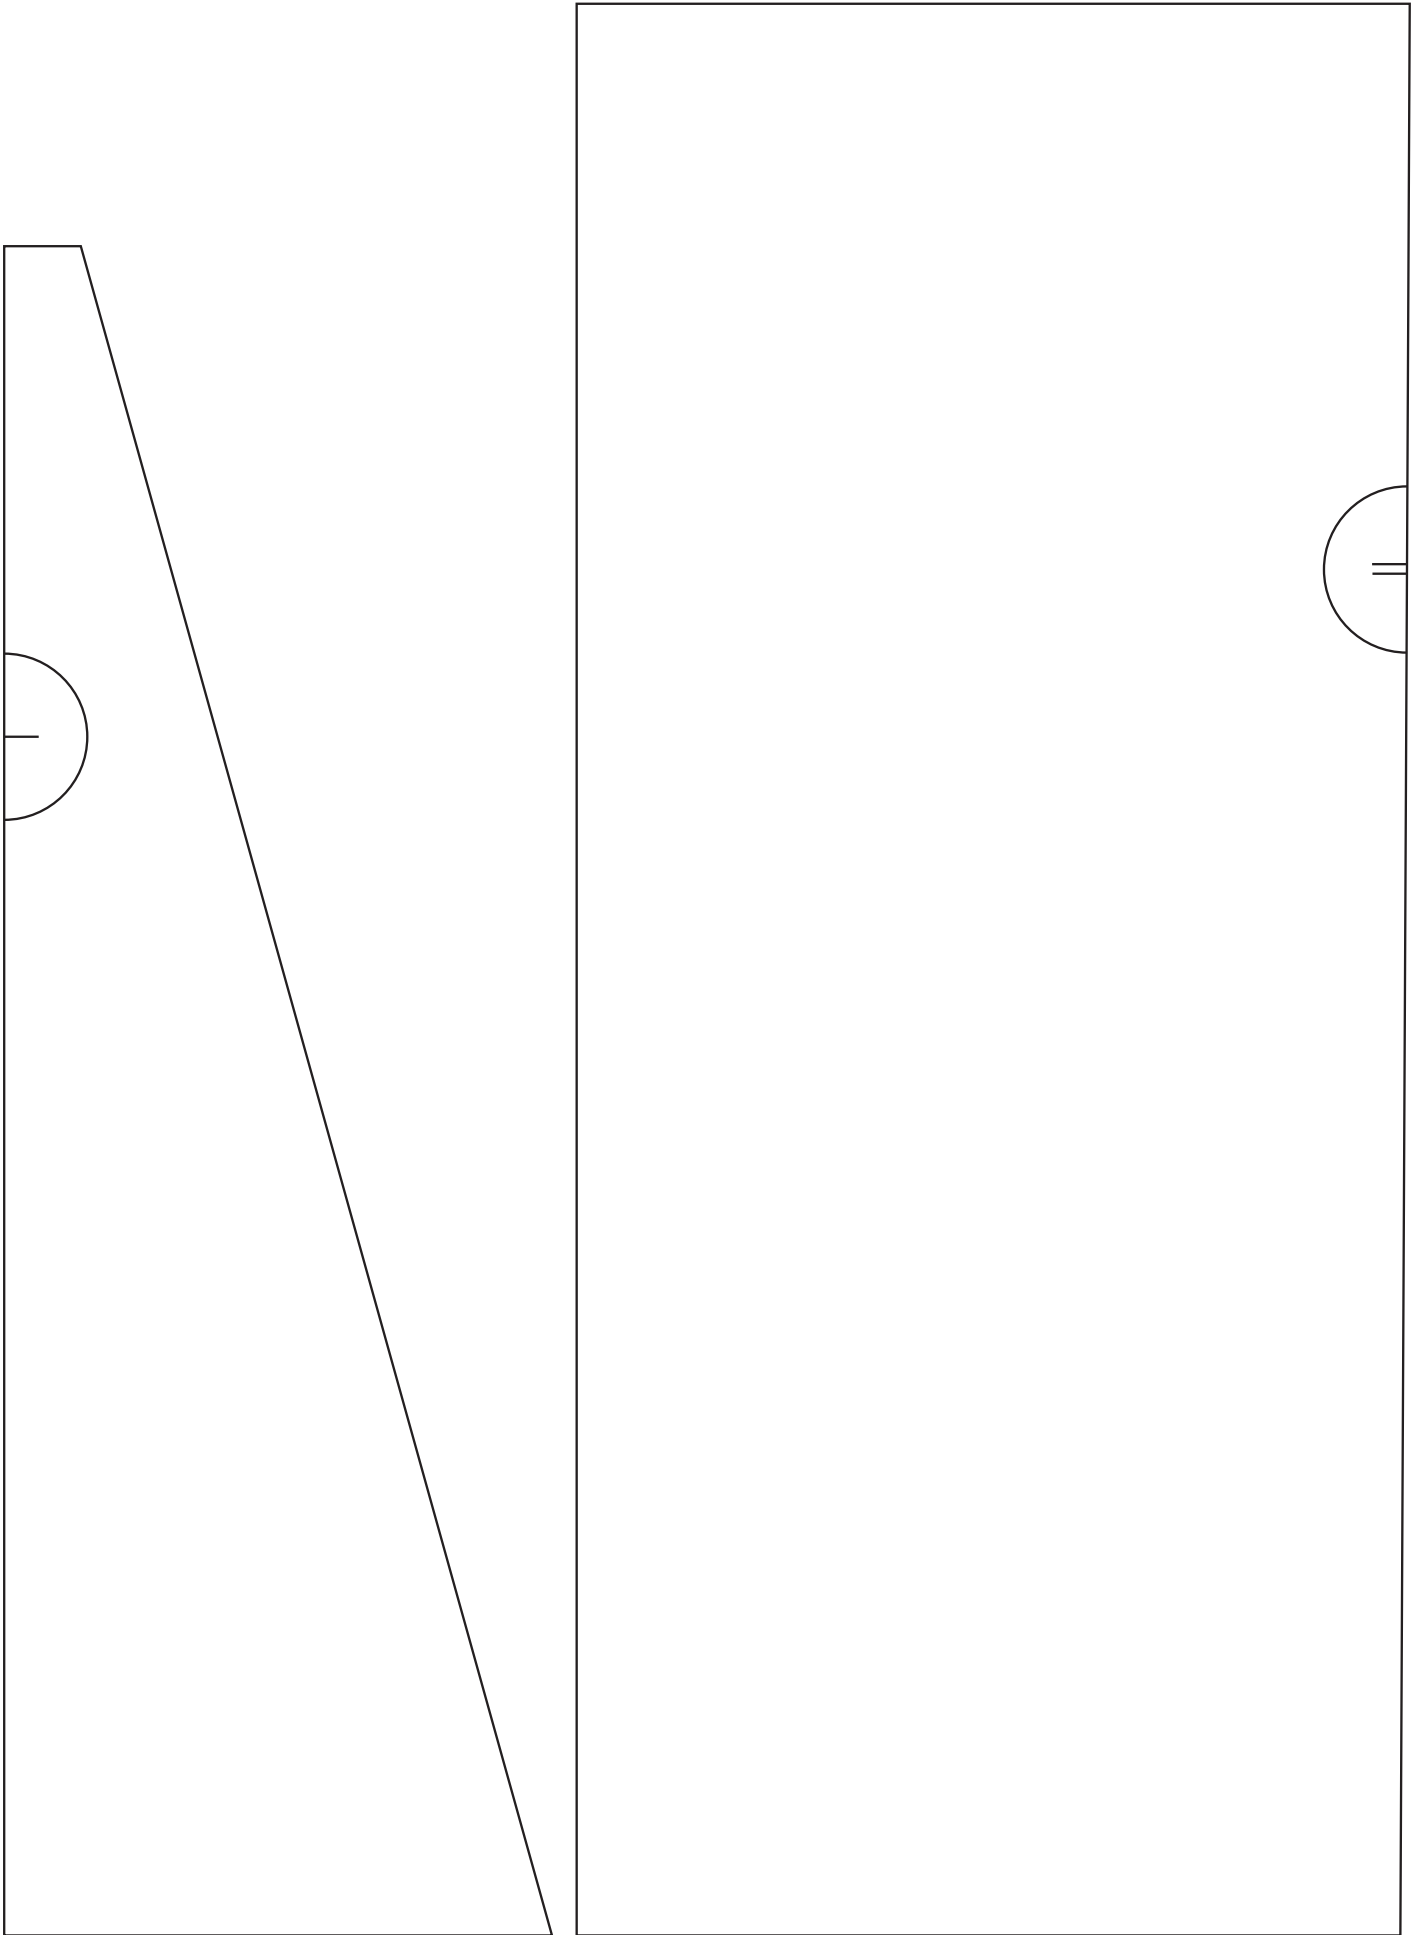

Lincraft



BASE

**CUT: 1xFABRIC
1xINTERFACING**

TOP

**CUT: 1xFABRIC
1xINTERFACING**

HANDLE

CUT: 2xFABRIC

Lincraft