

Lincraft



#P056

VERONICA
YARN

Seamed Cabled House Socks
for the Family

EASY KNIT

Knitted as a flat piece from the cuff down, these chunky cabled socks are the perfect introduction to knitting socks with cables. Crafted from our soft and durable Veronica yarn, and lined with fleece they're great for wearing around the house. We've created four sizes, so the whole family can wear them. Don't worry if you're outside these sizes we'll tell you how to lengthen and shorten them so they can fit any foot!

MEASUREMENTS

Size		2-5	8-10	Women's	Men's
		years	years		
Fits Foot Length	cm	14	18	24	27
Sock Length	cm	12	16	23	30
Yarn Required:					
Lincraft Veronica	100g balls	1	1	2	2

Please use only the yarn specified. Another yarn is likely to yield different results. Quantities are approximate as knitting styles may vary between knitters. Check the ball bands to ensure all yarn is from the same dye lot.

DIFFICULTY ●●●

NEEDLES AND EQUIPMENT:

A pair of 6.00mm knitting needles.
Wool needle for sewing in ends.
A Cable Needle.
A Stitch Holder.

TENSION:

18 sts and 20 rows to 10cm over stocking st, using 6.00mm needles.

KNITTING ABBREVIATIONS:

K: Knit
K2tog: Knit 2 Together
P: Purl
P2tog: Purl 2 Together
Sl1: Slip One Stitch purlwise
PSSO: Pass Slip Stitch Over
2/1 RPC: sl 1 st onto cn, hold in back, k2, p1 from cn
2/1 LPC: sl 2 sts onto cn, hold in front, p1, k2 from cn
2/2 RC: sl 2 sts onto cn, hold in back, k2, k2 from cn
2/2 LC: sl 2 sts onto cn, hold in front, k2, k2 from cn

PATTERN

This pattern is written for our Women's socks, all other stitch counts and sizes are written in the brackets for easy reference and are as follows
Womens (2-5 – 6-10 – Men's)

LEFT SOCK

Cuff:

Using 6mm needles cast on 42 (34 - 36 - 46) stitches.

Row 1: K2, *P2, K2 repeat from * to end.

Row 2: P2, *K2, P2, repeat from * to end.

Repeat the above row until the ribbing measures 4 (3-4-5) cm from beg.**

Calf Cable Panel:

For easy reference we've written out the set up row as follows as well as the first 4 rows of the full pattern, the Cable Chart and Pattern is available on the page following for easy reference.

TO ADJUST CALF WIDTH: If you need a little more or little less room around your calf, dec or inc by 1 st at each end of the cable set up row, Row 0 below.

Row 0: K6 (4 - 4 - 6), [CABLE ROW 0: K4, P4, K4], K24 (18 - 20 - 28)

Cable Repeat:

Row 1: P24 (18 - 20 - 28), [CABLE ROW 1: P3, 2/1 RPC, 2/1 LPC, P3], P6 (4 - 4 - 6)

Row 2: K6 (4 - 4 - 6), [CABLE ROW 2: K3, P2, K2, P2, K3], K24 (18 - 20 - 28)

Row 3: P24 (18 - 20 - 28), [CABLE ROW 3: P2, 2/1 RPC, P2, 2/1 LPC, P2], P6 (4 - 4 - 6)

Row 4: K6 (4 - 4 - 6), [CABLE ROW 4: K2, P2, K4, P2, K2], K24 (18 - 20 - 28)

Work 7 (0 - 0 - 17) more rows in the manner described above.

Keeping cable pattern correct work, work the next row as:

Next Row: K1, K2tog, K3 (1 - 1 - 3), work cable, knit to the last three sts, S11, K1, P5SO, K1.

Work in cable pattern for 3 (2 - 3 - 3) rows and repeat the last 4 (3 - 4 - 4) rows once (**once** - **once** - **twice**) more.

Continue without shaping, keeping cable pattern correct until the work measures 17 (8 - 12 - 23) cm from the beg ending on a WS row... 38 (30 - 32 - 40) sts rem.

IF CALF HAS BEEN ADJUSTED: If altered your calf width before, add or remove the extra sts when your work measures 12 (3 - 7 - 18) cm

Cable Pattern:

Row 0: K4, P4, K4

Row 1: P3, 2/1 RPC, 2/1 LPC, P3

Row 2: K3, P2, K2, P2, K3

Row 3: P2, 2/1 RPC, P2, 2/1 LPC, P2

Row 4: K2, P2, K4, P2, K2

Row 5: P1, 2/1 RPC, P4, 2/1 LPC, P1

Row 6: K1, P2, K6, P2, K1

Row 7: 2/1 RPC, P6, 2/1 LPC

Row 8: P2, K8, P2

Row 9: 2/1 LPC, P6, 2/1 RPC

Row 10: K1, P2, K6, P2, K1

Row 11: P1, 2/1 LPC, P4, 2/1 RPC, P1

Row 12: K2, P2, K4, P2, K2

Row 13: P2, 2/1 LPC, P2, 2/1 RPC, P2

Row 14: K3, P2, K2, P2, K3

Row 15: P3, 2/1 LPC, 2/1 RPC, P3

Row 16: K4, P4, K4

Row 17: P4, 2/2 RC, P4

Row 18: K4, P4, K4

Repeat from Row 1 to 18 for CABLE PATTERN

Turning the Heel:

Next row (RS): Knit the first 18 (16 - 17 - 19) sts, place a marker. The sts just worked are for the heel and will be worked in stocking st, while the cable pattern is worked in reverse stocking st as usual.

Next row: Work in cable pattern until the marker and purl to the end.

Repeat these two rows one more, place all the sts before the marker on a stitch holder and continue working the heel stitches only. ***

Women's and Men's Sizes Only:

Row 1 (RS): K17, turn

Row 2: P16, turn

Start here for sizes 2-5 and 6-10 year old.

Row 3: K14, turn

Row 4: P12, turn

Row 5: K10, turn

Row 6: P8, turn

Row 7: K6, turn

Row 8: P4, turn

Row 9: K6, turn


Row 10: P8 turn

Row 11: K10, turn

Row 12: P12, turn


ITEM A: Cable Chart for Socks

TO READ A CABLE CHART: Work RS rows from right to left and WS rows from left to right. Work reverse stockinette st in between each of the cables for the number of sts referenced in the pattern, please note these vary between sizes.

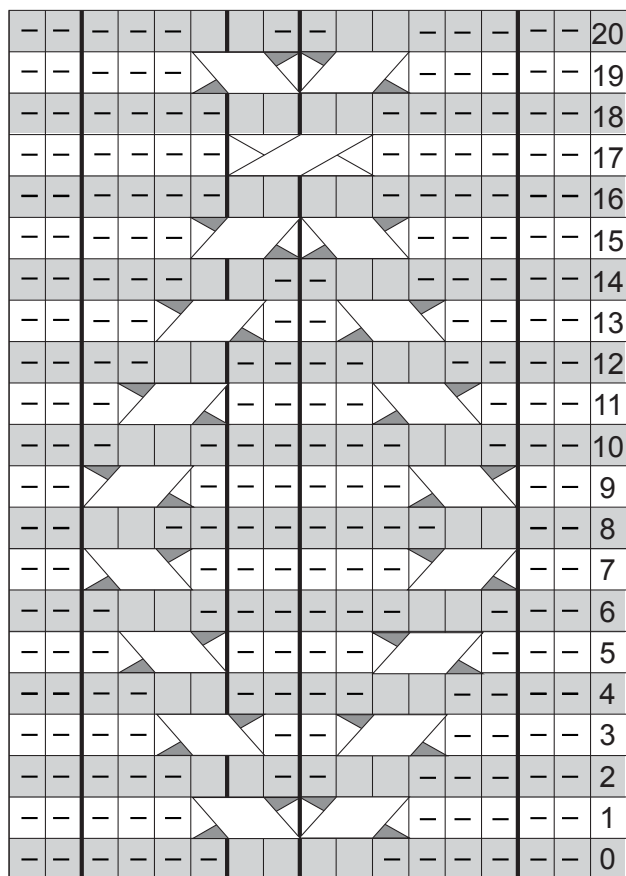

CABLE A
18 row repeat

KEY

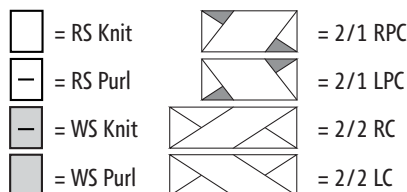

Women's and Men's Sizes Only:**Row 13:** K14, turn**Row 14:** P16 turn**All Sizes:****Row 15 (RS):** Knit across all of the heel sts and continue knitting across the cable panel on the st holders following the pattern.

Keep working the cable in the correct pattern and the heel sts in stocking st until the work measures, 17 (10 - 12- 20 cm) from the corner of the turned heel ending on a WS row.

ADJUSTING FOOT LENGTH: To lengthen or short the total sock length, the work will measure your foot length minus 3 cm.

K19 (15 - 16 - 20) sts and put rem sts onto a st holder.

Continuing on remaining 19 (15 - 16 - 20) sts only, knit 1 row.

Next Row: Working in stocking st for the rest of the work, cast off 3 (2 - 2 - 3) of the remaining sts at the beg of the next row. Repeat this row 3 more times... 7 (9 - 8 - 8) sts rem.

Cast off.

Returning to the sts on the stitch holder, join a new end of yarn to the work at the inner toe. Cast off 3 of the remaining sts at the beg of the next row. Repeat this 3 more times ... 7 (9 - 8 - 8) sts rem.

Cast off.

RIGHT SOCK**Calf Cable Panel:**

Work for left sock up until **

For easy reference we've written out the set up row as follows as well as the first 4 rows of the full pattern, the Cable Chart and Pattern is available on the page following for easy reference.

Row 0: K24 (18 - 20 - 28), [CABLE ROW 0: K4, P4, K4], K6 (4 - 4 - 6)

Work 11 rows (3 - 3 - 21 rows) in the manner described below:

Row 1: P6 (4 - 4 - 6), [CABLE ROW 1: P3, 2/1 RPC, 2/1 LPC, P3], P24 (18 - 20 - 28)**Row 2:** K24 (18 - 20 - 28), [CABLE ROW 2: K3, P2, K2, P2, K3], K6 (4 - 4 - 6),**Row 3:** P6 (4 - 4 - 6), [CABLE ROW 3: P2, 2/1 RPC, P2, 2/1 LPC, P2], P24 (18 - 20 - 28)**Row 4:** K24 (18 - 20 - 28), [CABLE ROW 4: K2, P2, K4, P2, K2], K6 (4 - 4 - 6),

Keeping cable pattern correct, work the next row as:

Next Row: K1 K2tog, K3 (1 - 1 - 3), work cable, knit to the last three sts, S11, K1, P5SO, K1.Work in cable pattern for 3 (2 - 3 - 3) rows and repeat the last 4 (3 - 4 - 4) rows once (**once** - once - **twice**) more.

Continue without shaping, keeping cable pattern correct until the work measures 17 (8 - 12 - 23) cm from the beg ending on a WS row... 38 (30 - 32 - 40) sts rem.

Turning Heel:**Next row (RS):** Knit the first 18 (16 - 17 - 19) sts, place a marker. These sts are for the heel and will be worked in stocking st, while the cable pattern is worked in reverse stocking st as usual. Work in cable pattern to end.**Next row:** Work in pattern until the marker then purl the last stitches.

Repeat these two rows one more, place all the sts after the marker on a stitch holder and continue working the heel stitches only. Work from *** to end in a similar fashion to the left sock.

MAKE UP AND FINISHING:

Join the inner sock seam together using a mattress stitch, and taking care to line the edge of the cuff up. Weave in all ends and joins.

ITEM B: Flatlay of Socks