



E T Y

Safety Rail Source®

HIPPO ANCHOR™

CUT SHEET

The Hippo Anchor™ is a dead weight anchor system that rests on top of the roof without penetrating it. This prevents leaks and other damage from occurring. Designed for temporary or permanent use, this fall arrest and fall restraint system is easy to assemble and transport.

The Hippo Anchor™ complies with OSHA standards for one worker in fall arrest or two in fall restraint.


- 39.5" x 39.5"
- Must be installed at least 10' from an edge
- Compatible with roofs with up to a 5° pitch
- Designed for compatibility with lanyards with 900 lbs. maximum arresting force
- Military Code - EM 385 -1, and ASSE z359.1, OSHA 1926.502 compliant
- Galvanized coating and corrosion resistant
- Fall restraint up to 2 workers when 20" away from the edge
- Raised central anchor reduces the travel distance in the case of fall arrest



Hippo Counterweight Anchor
12 Plate System, 635 lbs. Part ID: **65219**






CUT SHEET

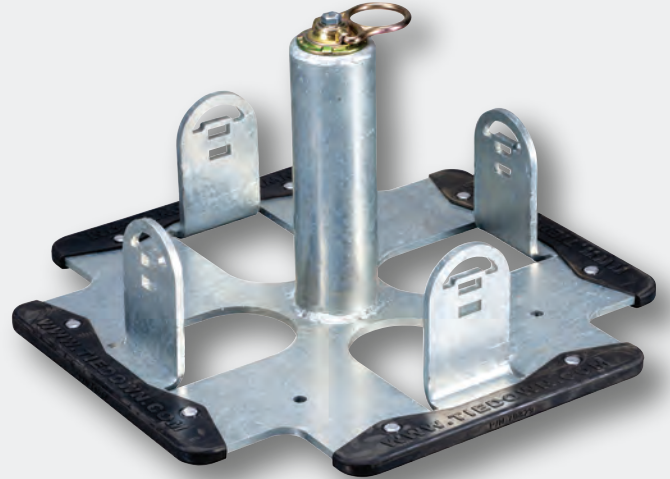

- Galvanized and corrosion free parts
- System breaks down for easy transport
- Easy assembly in minutes

- Standard 360° rotation
- Rigging points for lifting

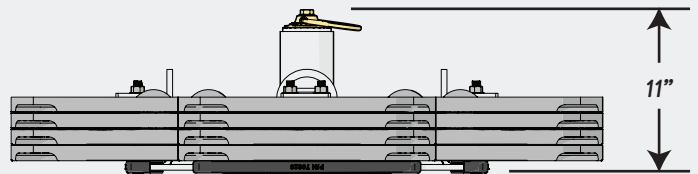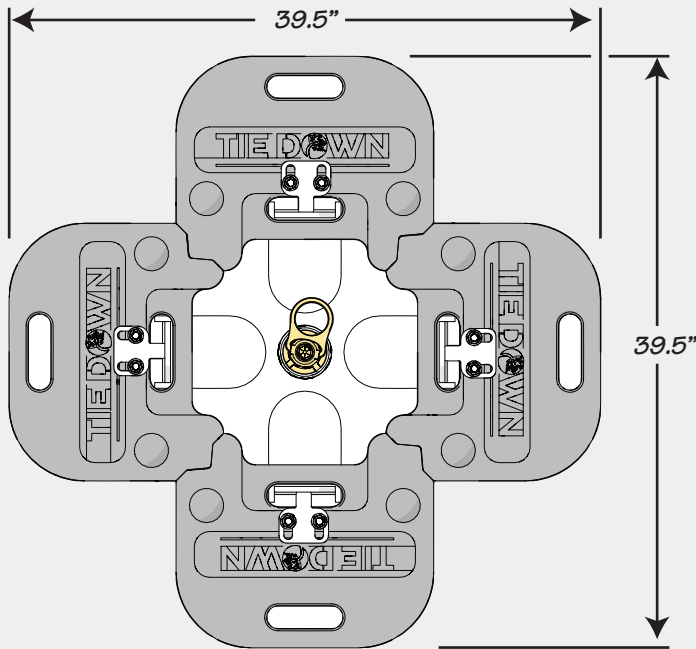

- 45 lbs. Each
- 14" x 17" x 1"
- Galvanized Iron

RateL Counterweight Anchor
 12 Plate System, 635 lbs.
 16 Plate System, 825 lbs.
 (1) Counterweight, 45 lbs.

Part ID: 65219
 Part ID: 65220
 Part ID: 11032

