


Safety Rail Source®

NEXTGEN 3000™ UNIVERSAL BASE

PRODUCT FLIER

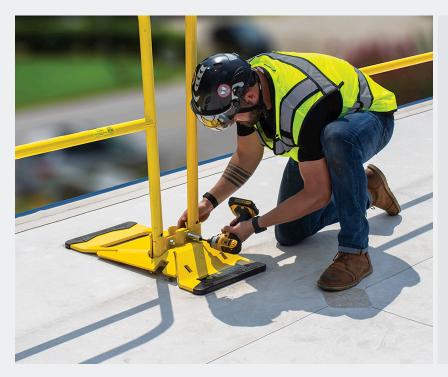

KEY FEATURES

- · Universal Base weighs 58 lbs.
- · No pins required
- · Fits all competitions upright rails
- Fit 1.66 to 1.90 outside diameter (OD) rail
- Includes rubber footing for added rooftop protection
- · Includes toe-board slots
- Includes carrying hand hold to minimize pinch points
- Meets compliance: OSHA 1926.502.
- Test to meet CSA Z259 standards
- · Made in U.S.A.

The revolutionary Universal Base Guardrail System fits 100% of the upright guardrail systems used in the United States. The unique design does not require pins and allows a contractor to utilize their guardrail, regardless of the manufacturer. This allows everyone to reduce the weight of the bases by using the patented 58 lb Base. This weight reduction lowers freight costs, the installation time, and the burden of lifting 100 lbs when setting up on the job. Designed to reduce soft tissue injuries on the job, installs using an impact gun tightening our Universal Compression Clamp. This tightening effect eliminates the loose wobbling of other systems. In addition, the Universal Base Guardrail System can fit both 1.66 and 1.90 OD tubes. This is the most versatile and straightforward to install passive guardrail system for rooftop and job site applications.







SPEED







MAINTENANCE FREE



Safety Rail Source® 2570 Blvd of the Generals, Ste.200 Norristown, PA 19403 (877) 723-3766 www.SafetyRailSource.com