




Safety Rail Source®

NEXTGEN SKYLIGHT SAFETY-SCREEN™

MODEL SSS

PRODUCT FLIER

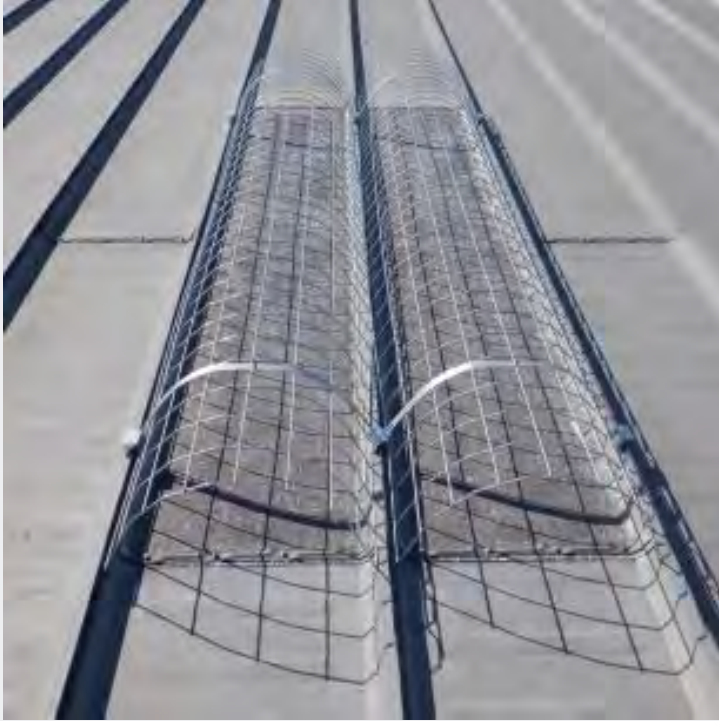

Features:

- OSHA compliant at 200 lbs. force
- Cal. OSHA compliant at 400 lbs. force
- Screw in attachment
- Lightweight

Materials:

- 4" x 4" wire mesh grid
- Stainless Steel straps
- S-5 type clamps
- Stainless steel clips
- Galvanized mesh (standard)
- Stainless steel mesh (optional)

Installation:

- Attach S-5 type clamps to the roof seam.
- Place screen on top of clamps.
- Attach screen to S-5 clamp using bolt and clip.
- Installation time once material is staged is 10 minutes.

NextGen Standing Seam Skylight-Screens™, Model SSS, provides an easily installed skylight cover in compliance with OSHA Code: 1910.28(b)(3)(i). The skylight fall protection system guards against injuries or death from accidental falls through the lens of the skylight.

The heavy metal 4 x 4 grid is bent to a semi-circle form and fastened to the roof seams using S-5 type clamps and two stainless steel straps.

The bent skylight cover identifies the skylight location in case of snow on the rooftop.

Model SSS skylight guards are available in galvanized or stainless steel wire mesh. The screen can be special ordered with a design to withstand a 400 pound load to comply with Cal-OSHA standards.



Made in USA

Safety Rail Source®
2570 Blvd of the Generals, Ste. 200
Norristown, PA 19403
(877) 723-3766
www.SafetyRailSource.com