

# 24V DC Low-Voltage Slim LED Flush Mount



Shown in White



## FEATURES

- Ultra Slim, Low Profile
- CRI >80
- Flush Mount
- 24V DC Input
- Lifetime: 100,000+ hrs.
- Mounting Accessories Included
- Low-Voltage PWM Dimmable\*

\*When used with CLEANLIFE® approved Low-Voltage LED Dimmer

## Color Temperature



3000K

## Finish




Matte White



Matte Black




Brushed Nickel

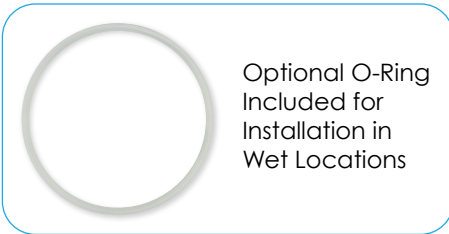

Optional O-Ring  
Included for  
Installation in  
Wet Locations

## PRODUCT DIMENSIONS

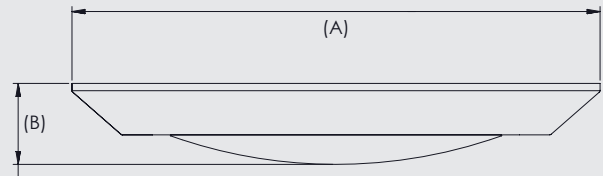

Size	(A)	(B)
6"	5-1/2"	1"
8"	7-3/4"	1-1/4"

## ORDERING INFORMATION

Part Number	Size	Color Temperature	Finish	Average Rated Life (hrs.)	Input Voltage	Rated Power	Typical Lumens (±10%)	CRI (±5)
CL-LED-24-USFM05-WH30-01	6"	3000K	Matte White	100,000+	24V DC	9W	780lm	80+
CL-LED-24-USFM05-MB30-01	6"	3000K	Matte Black	100,000+	24V DC	9W	780lm	80+
CL-LED-24-USFM05-BN30-01	6"	3000K	Brushed Nickel	100,000+	24V DC	9W	780lm	80+
CL-LED-24-USFM08-WH30-01	8"	3000K	Matte White	100,000+	24V DC	10W	950lm	80+
CL-LED-24-USFM08-MB30-01	8"	3000K	Matte Black	100,000+	24V DC	10W	950lm	80+
CL-LED-24-USFM08-BN30-01	8"	3000K	Brushed Nickel	100,000+	24V DC	10W	950lm	80+

## CLEANLIFE®

1-800-316-2532

info@cleanlife.com

www.cleanlife.com

CLEANLIFE®, Finding a Better Way®, and the Pinwheel Mark are registered trademarks of Superior Ventures LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.

