

Vapor Tight LED Jelly Jar Fixture



CLEANLIFE® LED



as show with transparent glass



as show with frosted glass

MOUNTING OPTIONS



Vapor Tight LED Fixture
NSF/ANSI 2
SA34084



5-Year Limited Warranty

APPLICATION INFORMATION

Applications

- Indoor/Outdoor
- Cooler Lighting
- Bathroom Lighting
- Decorative Lighting
- Retail, Residential, Hospitality & Food Service Locations

Market Segments

- All

CLEANLIFE® Vapor Tight LED Jelly Jar Fixtures combine classic and familiar designs with high performance LED technologies for indoor and outdoor applications. Merging energy efficiency, dust and moisture protection with a robust lamp guard, our Vapor Tight LED Jelly Jar Fixtures are a robust solution for numerous different projects or applications.


FEATURES

- 100~277VAC
- Shatter-Proof Polycarbonate Plastic Housing
- Flush Mount, Ceiling or Wall
- Grey Finish & Transparent or Frosted Housing
- Long Lifetime, L70 >50,000 Hours
- Operating Temperature from -25°C ~+50°C
- 5000K Natural Daylight Color Temperature
- High Color Rendering, CRI>80
- UL-Rated for Wet Locations
- ETL & **UL EPH-Certified to NSF 7 Standards**
- Mounting Hardware Included
- Mercury & Lead Free, RoHS Compliant
- 5-Year Limited Warranty

SPECIFICATIONS

Dimensions	8.8"H x 5.5"W
Operating Temp.	-25°C~+50°C
Efficacy	See Table
Application	Indoor/Outdoor
Warranty	5-year Manufacturer's Limited

Color Temperature



Vapor-Tight



Ultra Bright



Robust Design



Energy Saving



CLEANLIFE® LED

Specifications & Data




Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Lens	Color Temperature	Average Rated Life (hrs.)	Input Voltage (V)	Rated Power (W) ($\pm 10\%$)	Typical Lumens (lm) ($\pm 10\%$)	Nominal Lumens Per Watt	CRI (± 5)
CL-VPFT-GY50	Transparent	5000K ± 285	L70>50,000	100~277V AC	12	550	46	>80
CL-VPFF-GY50	Frosted	5000K ± 285	L70>50,000	100~277V AC	12	450	38	>80

Vapor Tight Jelly Jar Dimensions

Part Number	(A) Height (in./mm)	(B) Width (in./mm)
CL-VPFT-GY50	8.8/226	5.5/141
CL-VPFF-GY50	8.8/226	5.5/141

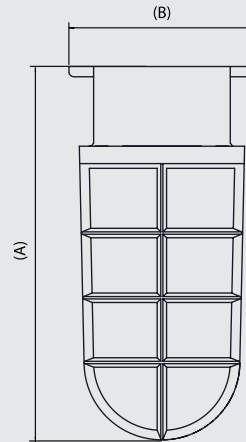

CLEANLIFE ENERGY LLC

1-800-316-2532

support@cleanlifeled.com

www.cleanlifeled.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of Superior Ventures LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.



CLEANLIFE® LED