


Gen 2 Vapor Tight LED Fixtures



CLEANLIFE® Vapor Tight LED Fixtures are able to turn on instantly in cold temperatures with virtually no start up time, and feature weatherproof protection from temperature-variable environments and dust.

MOUNTING OPTIONS

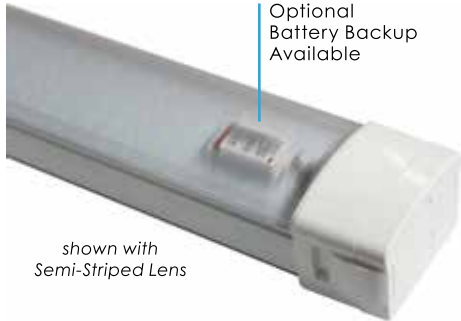


*0-10V Dimming Available with Battery Backup Models Only. See reverse for more information.

FEATURES

- 100~277V AC Input
- 0~10V Dimmable (Battery Backup Models Only)
- 4' & 8' Standard Sizes, Semi-Striped or Frosted Lens
- Long Lifetime, L70>50,000 Hours
- Virtually Eliminated Maintenance
- Vapor Tight, Dust Proof & Waterproof
- Optional Emergency Battery Backup
- Recessed, Surface, or Suspended Mounting Options*
- Suitable for Freezer and Walk-In Cooler Applications

*Suspended Mounting Kit Sold Separately. Surface Mount Kit Included.

IP68 END CONNECTOR & WAGO CONNECTORS

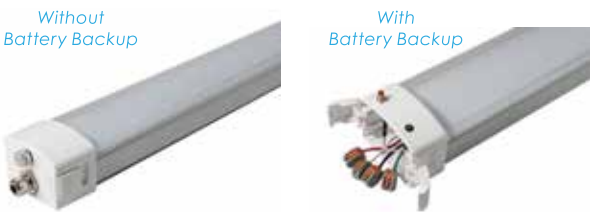

SPECIFICATIONS

Dimensions	See Table
Operating Temp.	-30°C~+60°C
Efficacy	Up to 137.5 LPW
Application	Indoor / Outdoor
Warranty	5-Year Manufacturer's Limited

APPLICATION INFORMATION

Applications

- Parking Garages
- Walk-In Coolers
- Stairwells
- Warehouse
- Utility Areas

Market Segments

- All

Color Temperature





shown with
Frosted Lens


Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Length (IN)	Lens	Color Temperature	Average Rated Life (hrs.)	Input Voltage (V)	Rated Power (W) (±10%)	Typical Lumens (lm) (±10%)	Nominal Lumens Per Watt	CRI (±5)	Emergency Battery Backup	0~10V Dimmable
CL-A65S4-40-C (NBB)	48	Semi-Striped	4000K ±275	L70>50,000	100~277V AC	40	5500	137.5	85	No	No
CL-A65S4-40-C (D,BB)	48	Semi-Striped	4000K ±275	L70>50,000	100~277V AC	40	5500	137.5	85	Yes	Yes
CL-A65F4-40-C (NBB)	48	Frosted	4000K ±275	L70>50,000	100~277V AC	40	5000	125	85	No	No
CL-A65F4-40-C (D,BB)	48	Frosted	4000K ±275	L70>50,000	100~277V AC	40	5000	125	85	Yes	Yes
CL-A65S4-40-N (NBB)	48	Semi-Striped	5000K ±285	L70>50,000	100~277V AC	40	5500	137.5	85	No	No
CL-A65S4-40-N (D,BB)	48	Semi-Striped	5000K ±285	L70>50,000	100~277V AC	40	5500	137.5	85	Yes	Yes
CL-A65F4-40-N (NBB)	48	Frosted	5000K ±285	L70>50,000	100~277V AC	40	5000	125	85	No	No
CL-A65F4-40-N (D,BB)	48	Frosted	5000K ±285	L70>50,000	100~277V AC	40	5000	125	85	Yes	Yes
CL-A65S8-80-C (NBB)	96	Semi-Striped	4000K ±275	L70>50,000	100~277V AC	80	10,500	131.25	85	No	No
CL-A65S8-80-C (D,BB)	96	Semi-Striped	4000K ±275	L70>50,000	100~277V AC	80	10,500	131.25	85	Yes	Yes
CL-A65F8-80-C (NBB)	96	Frosted	4000K ±275	L70>50,000	100~277V AC	80	10,000	125	85	No	No
CL-A65F8-80-C (D,BB)	96	Frosted	4000K ±275	L70>50,000	100~277V AC	80	10,000	125	85	Yes	Yes
CL-A65S8-80-N (NBB)	96	Semi-Striped	5000K ±285	L70>50,000	100~277V AC	80	10,500	131.5	85	No	No
CL-A65S8-80-N (D,BB)	96	Semi-Striped	5000K ±285	L70>50,000	100~277V AC	80	10,500	131.5	85	Yes	Yes
CL-A65F8-80-N (NBB)	96	Frosted	5000K ±285	L70>50,000	100~277V AC	80	10,000	125	85	No	No
CL-A65F8-80-N (D,BB)	96	Frosted	5000K ±285	L70>50,000	100~277V AC	80	10,000	125	85	Yes	Yes

Vapor Tight Fixture Dimensions

Part Number	Length (in/mm)	Width (in/mm)	Height (in/mm)
CL-A65X4-40-X (NBB)	47.2/1200	3.7/94	2.7/69
CL-A65X4-40-X (D,BB)	47.2/1200	3.7/94	2.7/69
CL-A65X8-80-X (NBB)	94.5/2400	3.7/94	2.7/69
CL-A65X8-80-X (D,BB)	94.5/2400	3.7/94	2.7/69

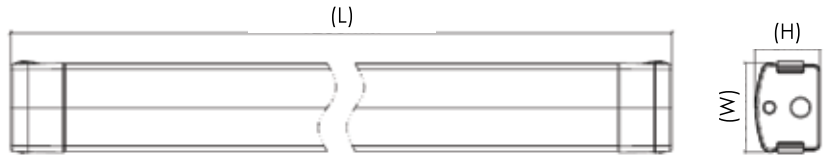

Suspension Kit

Part Number: CL-A65-SPN-K-01 (sold separately)



2 x Suspension Harnesses



2 x Suspension Cable Bushings



2 x Machine Screws



2 x Long Mounting Screws



2 x Plastic Anchors



2 x Bolts

CLEANLIFE® LED

1-800-316-2532
info@cleanlife.com
www.cleanlife.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of Superior Ventures LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.

