

Traditional Style LED Vapor Tight Fixture



FEATURES

- 0~10V Dimmable*
- 120~277V AC Input
- Available in 2' or 4'
- Instant On, No Flicker, Mercury Free, No UV
- Surface Mount
- Exceptional Color Accuracy, CRI >80
- Long Lifetime, L70>50,000 Hours
- IP65 with Metal Knockouts
- ETL Certified, RoHS Compliant & DLC Certified

*Dimmable with compatible 0~10V dimmers only. Speak to a CLEANLIFE® representative for more information.



IP65 END CONNECTORS



SPECIFICATIONS

Dimensions	See Table
Operating Temp.	-40°F (-40°C)~+104°F (40°C)
Efficacy	110 LPW
Application	Indoor / Outdoor
Warranty	5-Year Manufacturer's Limited

APPLICATION INFORMATION

Applications

- Parking Garages
- Walk-In Coolers
- Stairwells
- Warehouse
- Utility Areas

Market Segments

- All

Color Temperature



Specifications & Data




Project/Job	Notes
Date	
Comments	
Prepared by	

Ordering Information

Part Number	Length (IN)	Color Temperature	Average Rated Life (hrs.)	Input Voltage (V)	Rated Power (W) (±10%)	Typical Lumens (lm) (±10%)	Nominal Lumens Per Watt	CRI (±5)	0~10V Dimming
CL-VT-235-20W-840D	24	4000K ±275	L70>50,000	100~277V AC	20	2200	110	80	Yes
CL-VT-235-20W-850D	24	5000K ±283	L70>50,000	100~277V AC	20	2200	110	80	Yes
CL-VT-465-40W-840D	48	4000K ±275	L70>50,000	100~277V AC	40	4400	110	80	Yes
CL-VT-465-40W-850D	48	5000K ±283	L70>50,000	100~277V AC	40	4400	110	80	Yes

Vapor Tight Fixture Dimensions

Part Number	Length (in/mm)	Width (in/mm)	Height (in/mm)
CL-VT-235-20W-8XXD	23.0	3.7	3.0
CL-VT-465-40W-8XXD	46.9	3.7	3.0

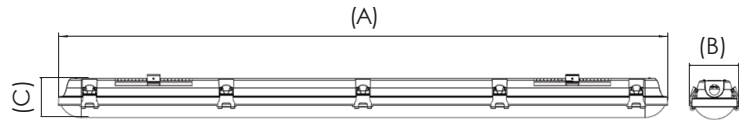

CLEANLIFE® LED

1-800-316-2532

support@cleanlife.com

www.cleanlife.com

CLEANLIFE® and the Pinwheel Mark are registered trademarks of Superior Ventures LLC. All Rights Reserved. Not to be reproduced or published without prior permission.

PLEASE NOTE: Product specifications are based off of third party test reports and are subject to change without notice.

