

liner
world
.com

Liner Installation
Instruction Manual



Must Read Installation Instructions

Read the following information and instructions before attempting installation.

1. For best results, this pool liner is designed to be installed according to the instructions enclosed. Failure to follow these instructions will void the warranty. For additional video installation instruction, go to linerworld.com/how-to-install-an-above-ground-pool-liner.php.
2. For best results, this pool liner is designed to be installed in 80 degrees or warmer temperatures. Filling should be completed in hot and sunny conditions, daylight only, do not fill at night.
3. It is recommended to hire a professional contractor. However, the buyer assumes the risk, as the general contractor, when the buyer chooses a contractor. It is the buyer's responsibility to make sure that the contractor follows all of the enclosed instructions. If the contractor does not follow the instructions, the burden falls between the buyer and the contractor and not on the seller.
4. It is the buyer's responsibility to inspect the box, label, and entire pool liner before installation. The moment water is added to pool the buyer has assumed all responsibility that the correct product was sent by the seller and the product has been accepted 'as is' and it is not returnable under any conditions.




Other Tips & Tricks to Note

- Do not schedule the project immediately before a pool party, as any minor delay will cause a disruption in your plans
- Plan installation around dry, hot weather
- If you hire a professional, it is your responsibility to make sure they install per our instructions provided
- Maintain your pool water – once a pool liner holds water for several days, it is very likely it will hold water for many years if properly maintained. If the pool begins to lose water after several days of holding water, it is likely due to improper use, abuse, poor maintenance, poor water chemistry, or act of God.
- Understand the most important aspect of your pool is SAFETY. It is your responsibility to ensure your pool meets all National, State, and Local building codes and safety requirements.
- Do not use a water truck – if you must, fill as slow as possible
- Never completely drain your pool unless changing the liner
- Do not scrub your liner with a pool vac or brush
- Always use a ladder pad under your stairs and ladders
- Always use liquid chlorine – no powder when applied directly to pool
- Always have a pool liner patch kit on hand & goggles




1

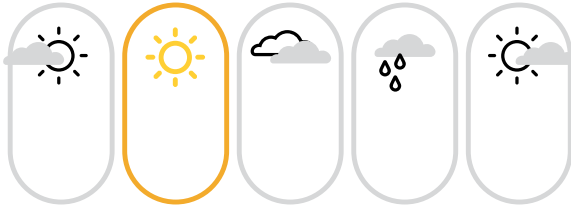

Choose a warm day with no rain or clouds. This is very important. When it is warm and sunny, the liner fits into place with ease.

2

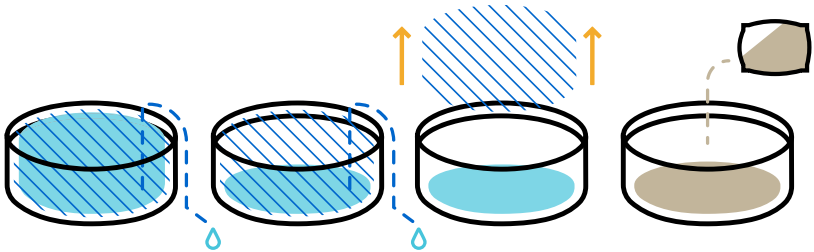


Helpful Tip:

An industrial broom works well to smooth base.


Pump every drop of water out of the pool. Then remove the old liner. Next, add some pool sand to re-groom the base.

3

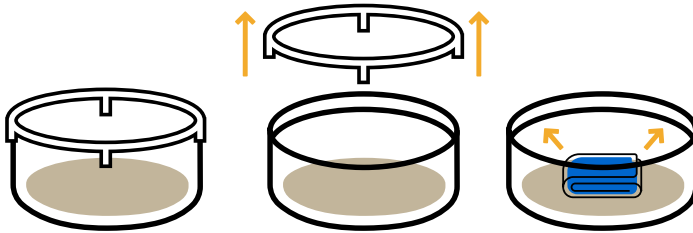


Remove all top rails to expose your bare pool walls. Unfold the liner & center in the middle of the pool. Evenly spread out, ignoring the seams. The liner will not go all the way to the pool wall. There will be a space between the edge of the liner and the wall, allowing room for the liner to stretch into place.

4

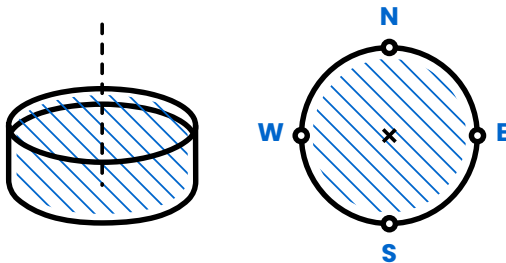


Do Not Skip This Step. This is where 90% of installation mistakes occur. Once the liner is centered, you will need to temporarily attach 4 points of the liner to the pool wall (North, South, East, West). This will ensure your liner is perfectly even all the way around. If you only start with one point and start attaching the liner by working your way around the pool, the liner will not be straight and may seem short or too small for the pool.

5

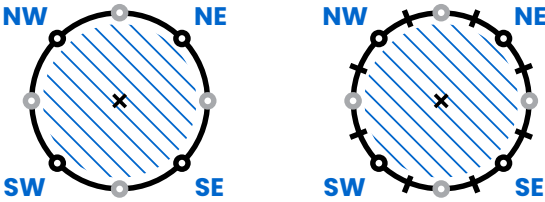

Once your liner has your 4 direction points attached to the walls, add 4 more in between those points and attach (Northwest, Northeast, Southwest, Southeast). You may now attach the liner with coping, or into the bead receiver, all the way around the pool.

6

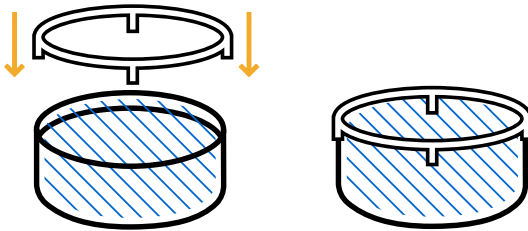


Helpful Tip:

The liner may feel tight, but this is normal.


Add your top rails and metal back on. The liner is now center and aligned. The liner may feel tight, but this is normal. The liner will stretch into place during the vacuum and filling process.

7

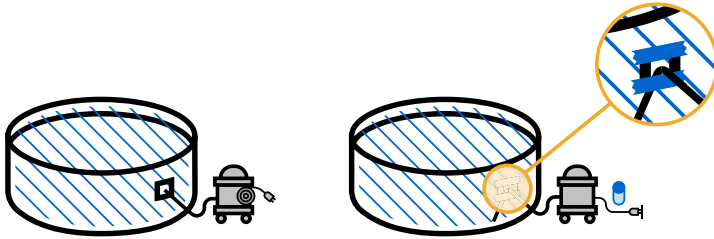

After installing the liner to the wall, add your shop vac to the open skimmer hole and push the vac hose down to the sand. Then duct tape the open space at the skimmer and return jet for an air tight seal. Plug the vac into a safe (GFCI) outlet. When you turn the vac on, if there are any wrinkles, or desired adjustments with the liner, manipulate them by hand before filling.

8

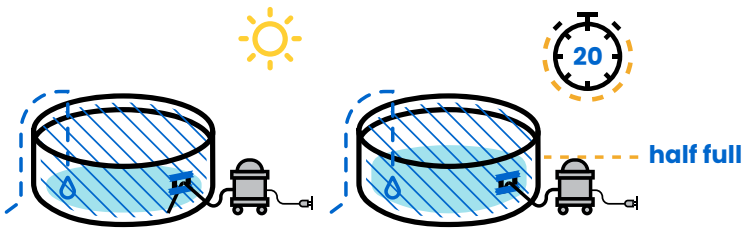


As the vac runs, and the liner is adjusted to your likeness, you can start filling the pool with water. You think your work is done, but it is not done yet. Fill during hot and sunny hours only. Fill only when someone is home to check on the filling process every 20 minutes until the pool is half way full. If something loosens, pulls inwards, or slips at the top, turn everything off, adjust, tighten clamp down, and resume filling.

Important:

Check filling process every 20 minutes until the pool is half way full.

9

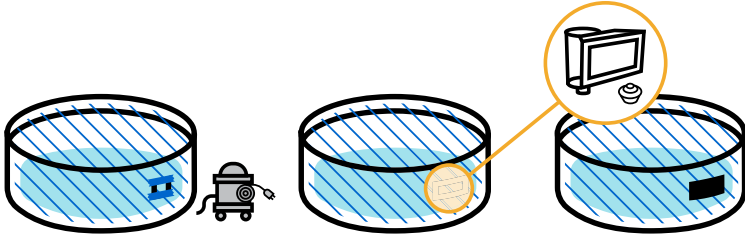

The shop vac continues to run until the pool is half way full. As it fills, pull the vac hose up a little bit at a time so that it stays above the water level in the pool. When the water reaches the half way point, eliminate the vac by pulling the hose out of the pool wall. Then cut the holes for your plumbing pieces including the skimmer box and return jet.

Returns Information

Returning a product at LinerWorld is simple! Just contact one of our representatives at support@linerworld.com or by calling **708-489-9932**.

You qualify for a return if:

- You purchased your products within the last 90 days
- Your items are not opened, and are in original packaging, with all documentation
- Liners are not unrolled out of their factory folding

Contact us today to initiate your return! Please do not send any items back without contacting us first, or your refund processing time may be delayed.

Pool Liner Warranty

Having an issue with your pool liner? We are here to help! Give us a call at **708-489-9932** or email support at **support@linerworld.com**.

LinerWorld warrants this above ground pool liner at the time of purchase, for 25 years, or the lifetime of the swimming pool (whichever comes first) to be free from defects in workmanship. LinerWorld reserves the sole right to decide if a liner is covered under warranty with respect to the below terms, conditions, and replacement costs.

The liner should be carefully inspected prior to installation. LinerWorld is not responsible for rips or punctures or seam tears due to mishandling or improper installation. It is the buyer's responsibility to complete a thorough inspection before installing the liner.

Seam tears, rips, punctures, abuse, and seasonal damages are not covered under the warranty. The following prorated replacement schedule constitutes a charge correlating to the suggested manufacturers retail price.

Successful claims are executed by the replacement of a pool liner only. If the same product is not available when processing a claim, a comparable product will be substituted. All warranties must be approved by our warranty department.

To process a warranty claim please contact us at **support@linerworld.com** with a photo of the suspected defect, along with your order and contact information.

Purchaser is responsible for all installation or re-installation costs for any liner repaired or replaced. The liner must be installed according to the instructions. LinerWorld is not responsible for any damage caused by faulty installation or inspection. This warranty is void if the pool water is emptied for any reason. The pool can be cleaned, no matter how dirty, with the proper filtration and water chemistry. LinerWorld and any affiliated dealer, is not responsible for chemicals, water loss, re-installation and/or labor costs and/or any inconvenience cost.



linerworld.com
support@linerworld.com
(708) 489-9932