



## Container Tie Down To Concrete Hardware Package (5 Pack)


5 each 3/4"-10 Fully Threaded  
High-Strength Grade 8 Carbon Steel Hex Head  
Screws, 3" Long, Zinc Yellow-Chromate Plated

5 each Steel Split Lock Washers,  
3/4" Screw Size, 0.766" ID,  
1.265" OD Zinc-Plated

5 each 3/4" Screw Size  
Grade 8 Steel Flat Washers,  
Oversized, 0.812" ID, 2.00" OD,  
0.177" Thickness Zinc Plated

5 each Steel Internally Threaded Anchor with  
3/4"-10 UNC Threads. Effective Embedment:  
8-1/8" with Epoxy Adhesive

Required Concrete: 2,500psi or greater

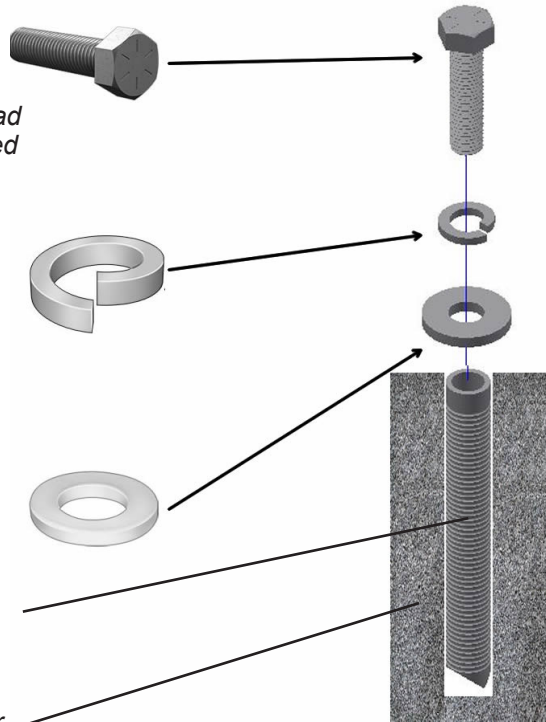

When properly installed the design strength (factored resistance) is:

**Tension:** 2,500psi (18,065lb), 3,000psi (19,790lb), 4,000psi (22,850lb), 6,000psi (27,985lb)

**Shear:** 2,500psi (38,910lb), 3,000psi (42,620lb), 4,000psi (49,215lb), 6,000psi (60,275lb)



**(Sold Separately)**

Manual Dispenser can be used with  
SB3413 and SB3417 Container Tie Down  
Kits Hardware Package.



Included (3) Injectable Epoxy Adhesive Cartridges  
(11.1OZ /330ML/16 CU-IN.), which is sufficient to  
bond when utilizing at least 2 steel anchors.

**SB3417**  
Container Tie Down To Concrete  
Hardware Package (5 Pack)

120922-R01

ISO 9001



CERTIFIED QUALITY  
MANAGEMENT SYSTEM

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

1 Sea Box Drive, East Riverton, NJ 08077-2022 | Phone: 856 . 303 . 1101 | Fax: 856 . 303 . 1501 | Email: parts@seabox.com

www.seabox.com | © Copyright 2020, Sea Box, Inc.