

Absorber[®]



Absorber®



The Absorber® Panel consists of a high performance acoustical core with hardened square or shaped edges and wrapped in an acoustical fabric.


The Absorber® Panel offers economy and performance yielding an NRC up to 1.00.

Installation: Standard Panel Dimensions: 2400mm length x 1200mm width (alternate lengths and widths are available) Thicknesses: 25mm, 50mm, 75mm and 100mm.

Select from industry standard and custom fabrics, fabrics with proof of acoustical performance preferred.

Absorber Panels can be easily and quickly hung on any wall surface using RPG's Impalit™ clip. For ceiling applications, the panels can be either direct mounted with Z-bar attachments or suspended using a cloud anchor kit. Panels can also be configured to install in a standard T-bar grid.

Fire rating: Euro Class B1. All our panels are extensively tested for your peace of mind.

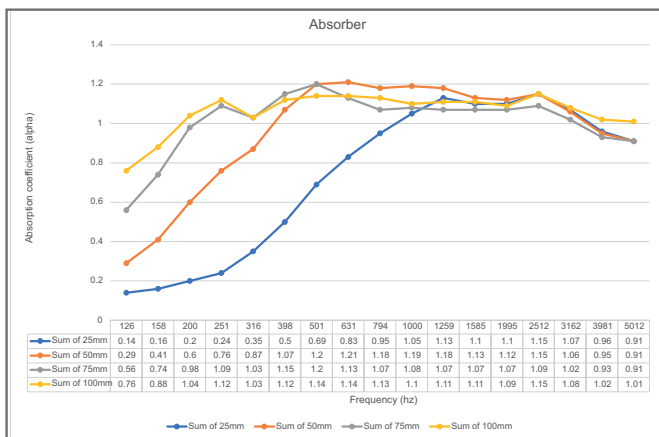

Frequency	Absorption E Mount
125	0.46
160	0.55
200	0.68
250	0.69
315	0.94
400	1.09
500	1.13
630	1.2
800	1.18
1000	1.15
1250	1.16
1600	1.18
2000	1.16
2500	1.18
3150	1.18
4000	1.17

Options: 2400x1200mm. Custom sizes are available

Finishes: Cara, Microsuede or Expo Felt included.
Underlining extra. Printing available

Mounting: Spike Mounts, Rotofast Ceiling and Wall, Aluminium Battens, Wood Battens, L bars, Z bars, Free Standing, Corner Mounts and Standoff mounts